



Approval

Customer :Visual Display Division DATE :01. Dec. 2010

SAMSUNG TFT-LCD

MODEL : LTF460HN01(BN07-00981A)

Any Modification of Specification is not allowed without SEC's Permission.

NOTE :

Customer's Approval	
SIGNATURE	DATE

APPROVAED BY <i>Heo Jeongmin</i>	DATE 01. Dec. 2010
PREPARED BY Bong U Lee	DATE 01. Dec. 2010

LCD Business

Samsung Electronics Co . , LTD.

MODEL	LTF460HN01	Doc. No	07-000-S-101201	Page	2/30
-------	------------	---------	-----------------	------	------

Contents

Revision History	(3)
General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Optical Characteristics	(7)
3. Electrical Characteristics	(10)
3.1 TFT LCD Module	
3.2 Back Light Unit	
4. Block Diagram	(13)
5. Input Terminal Pin Assignment	(14)
5.1 Input Signal & Power	
5.2 T- Board	
5.3 LVDS Interface	
5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color	
6. Interface Timing	(20)
6.1 Timing Parameters (DE only mode)	
6.2 Timing Diagrams of interface Signal (DE only mode)	
6.4 Power ON/OFF Sequence	
7. Outline Dimension	(23)
8. Reliability Test	(25)
9. Packing	(26)
10. Marking & Others	(27)
11. General Precaution	(28)
11.1 Handling	
11.2 Storage	
11.3 Operation	
11.4 Operation Condition Guide	
11.5 Others	

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

3/30



Revision History

Date	Rev. No	Page	Summary
01.Dec. 2010	000	all	First issued

www.panelook.com

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

4/30

General Description

Description

LTF460HN01 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT (Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 46.0" is 1920 x 1080 and this model can display up to 16.7 million colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide an excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV.

Features

- RoHS compliance (Pb-free)
- High contrast & aperture ratio with wide color gamut
- SPVA (Super Patterned Vertical Align) mode
- Wide viewing angle ($\pm 178^\circ$)
- High speed response
- FHD resolution (16:9)
- Low Power consumption
- 12 Normal CCFL (Cold Cathode Fluorescent Lamp)
- DE (Data Enable) mode
- 2CH-LVDS (Low Voltage Differential Signaling) interface (2 pixel/ clock)

General Information

Items	Specification	Unit	Note
Module Size	1082(H) x 627(V)	mm	± 1.0 mm
	60.3(D)		Max (With Inverter)
Weight	12.3	kg	
Pixel Pitch	0.17675(H) X 0.53025(W)	mm	
Active Display Area	1018.08(H) X 572.67(V)	mm	
Surface Treatment	Haze 5.5%, Hard-coating (2H)		Anti-Glare
Display Colors	16.7M (8 Bits-True)	colors	
Number of Pixels	1920 x 1080	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	450	cd/m ²	

MODEL	LTF460HN01	Doc. No	07-000-S-101201	Page	5/30
-------	------------	---------	-----------------	------	------

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

(V_{SS} = 0 V)

Item		Symbol	Min.	Max.	Unit	Note	
Power Supply Voltage		V _{DD}	10.8	13.2	V	(1)	
Storage temperature		T _{STG}	-20	65	°C	(2)	
Glass surface temperature (Operation)	Center	T _{OPR}	0	50	°C	(2),(5)	
	T. Uniformity	ΔT	-	10	°C		
Shock (non - operating)		S _{nop}	±X,±Y	-	40	G	(3)
			±Z	-	30		
Vibration (non - operating)		V _{nop}	-	1.5	G	(4)	

Note (1) T_a = 25 ± 2 °C

(2) Temperature and relative humidity range are shown in the figure below.


a. 90 % RH Max. (T_a ≤ 39 °C)

b. Relative Humidity is 90% or less. (T_a > 39 °C)


c. No condensation

(3) 11ms, sine wave, one time for ±X, ±Y, ±Z axis

(4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

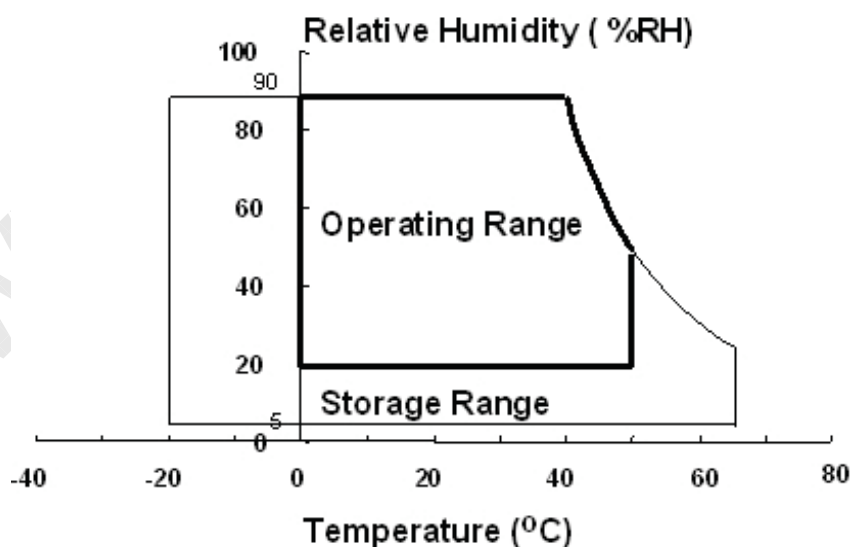

(5) Definition of test point

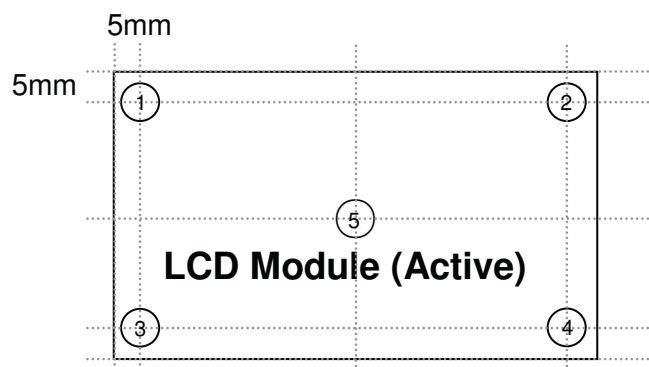

ΔT should be less than $10\text{ }^{\circ}\text{C}$ ($\Delta T = |T_{\text{OPR}} - T_{\text{MAX}}|$)

T_{OPR} : Temperature of the center of the glass surface (Test point 5)

$T_1 \sim T_4$: Temperature of each edge of the glass surface

T_{MAX} : The highest temperature of the glass surface

2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON RD-80S, TOPCON SR-3 ,ELDIM EZ-Contrast

(Ta = 25 ± 2°C, VDD=12V, fv= 60Hz, I_L = 15mA)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note	
Contrast Ratio (Center of screen)	C/R	Normal $\theta_L, R=0$ $\theta_U, D=0$	4000	5000	-		(1) SR-3	
Response Time	G-to-G		Tg	-	8	10	msec	(3) RD-80S
Luminance of White (Center of screen)	Y _L			400	450	-	cd/m ²	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx	Viewing Angle	0.640	TYP. -0.03	TYP. +0.03	(5),(6) SR-3	
		Ry		0.340				
	Green	Gx		0.300				
		Gy		0.600				
	Blue	Bx		0.150				
		By		0.060				
	White	Wx		0.280				
		Wy		0.290				
Color Gamut	-	-	72	-	%	(5) SR-3		
Color Temperature	-	-	10000	-	K			
Viewing Angle	Hor.	θ_L	C/R ≥ 10	75	89	-	Degree	(6) EZ-Contrast
		θ_R		75	89	-		
	Ver.	θ_U		75	89	-		
		θ_D		75	89	-		
Brightness Uniformity (9 Points)	B _{uni}		-	-	25	%	(2) SR-3	

- Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at 25 ± 2°C for stabilization of the back light. This should be measured in the center of screen.

Lamp current : 15.0 mA

Environment condition : Ta = 25 ± 2 °C

MODEL

LTF460HN01


Doc. No

07-000-S-101201


Page

8/30

Photo detector	Field
SR3	1°
RD-80S	2°

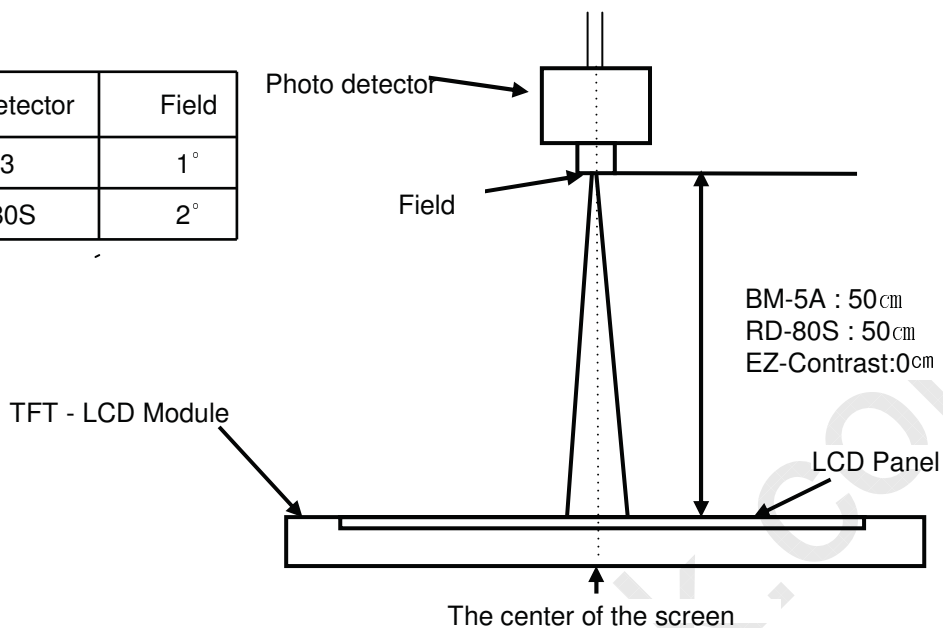

- Definition of test point

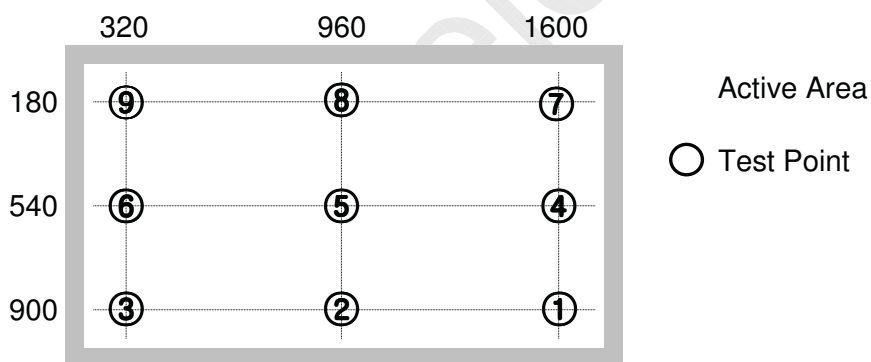

Note (1) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G \max}{G \min}$$

Gmax : Luminance with all pixels white

Gmin : Luminance with all pixels black

MODEL	LTF460HN01	Doc. No	07-000-S-101201	Page	9/30
-------	------------	---------	-----------------	------	------


Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White)

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

Bmax : Maximum brightness

Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

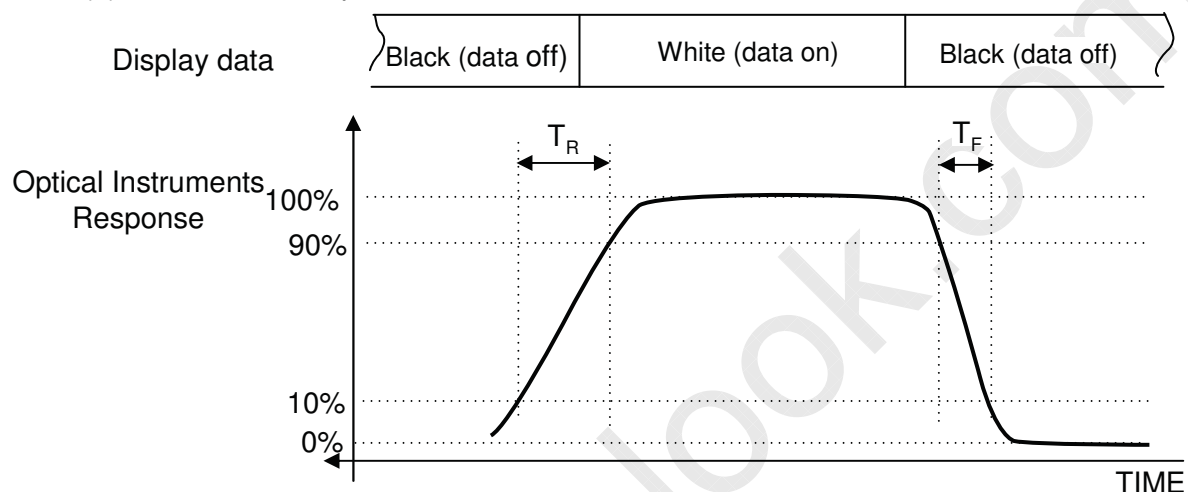

※ G-to-G : Average response time between Gray to Gray (Scale)


Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle

: Viewing angle range (C/R ≥ 10)

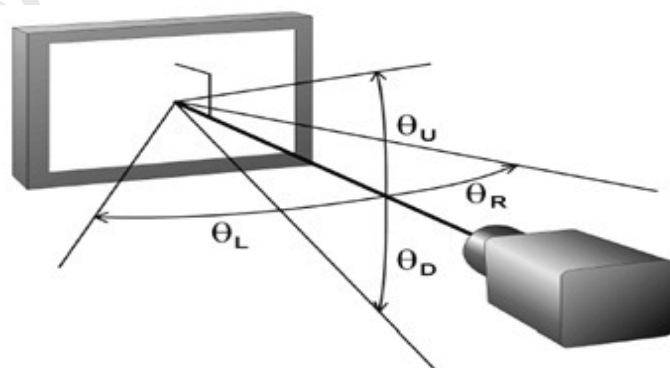

3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^\circ\text{C} \pm 2^\circ\text{C}$


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply	VDD	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	-	500	650	mA	(2),(3)
	(b) White	-	500	650	mA	
	(c) N-pattern	-	800	1000	mA	
Vsync Frequency	fV	48	60	65	Hz	
Hsync Frequency	fH	45	67.5	75	kHz	
Main Frequency	Fdclk	130	148.5	160	MHz	
Rush Current	IRUSH	-	-	4	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD} .


(2) $f_v = 60\text{ Hz}$, $f_{DCLK} = 148.5\text{ MHz}$, $V_{DD} = 12.0\text{V}$, DC Current.

(3) Power dissipation check pattern (LCD Module only)

a) Black Pattern b) White Pattern c) N-pattern

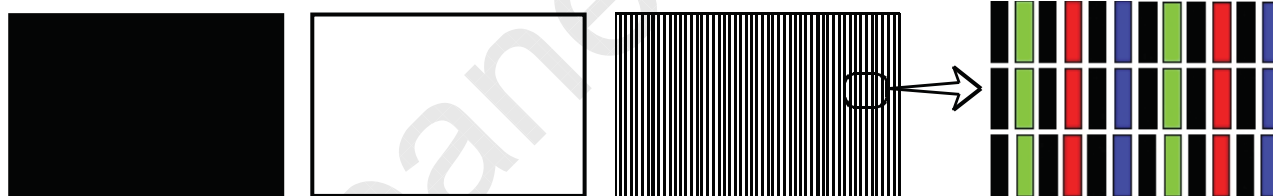


(4) Measurement Conditions

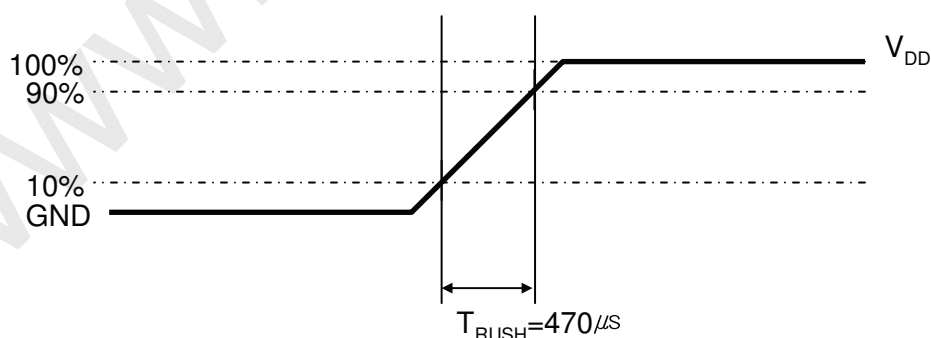

Rush Current I_{RUSH} can be measured when T_{RUSH} is $470\mu\text{s}$.

3.2 Back Light Unit

The back light unit contains 12 Normal type CCFLs (Cold Cathode Fluorescent Lamp).
 $T_a = 25 \pm 2^\circ\text{C}$

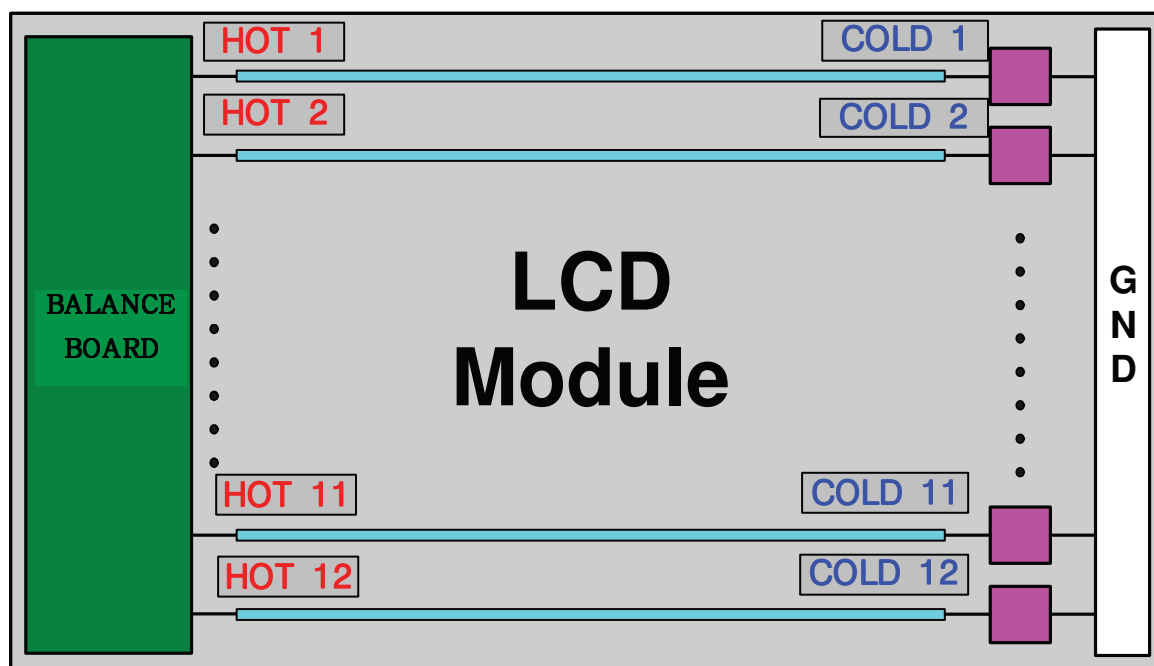


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	50000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : $T_a = 25 \pm 2^\circ\text{C}$, $I_L = 15\text{mA}$, For single lamp only.]

4. Block Diagram

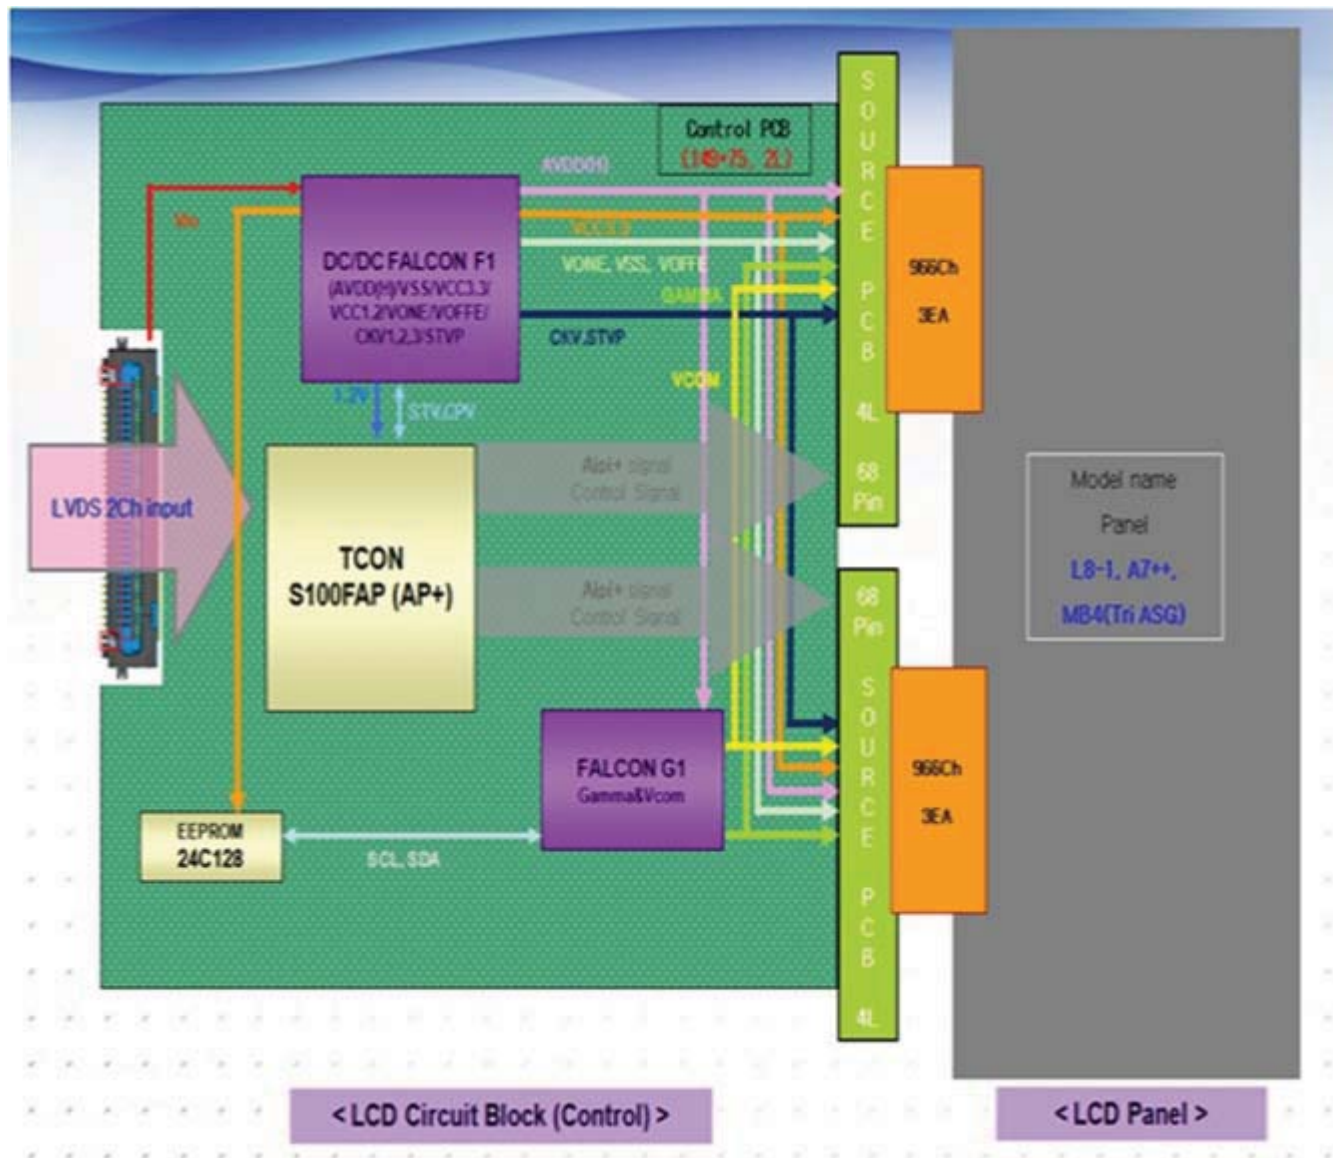

MODEL	LTF460HN01	Doc. No	07-000-S-101201	Page	13/30
-------	------------	---------	-----------------	------	-------

5. Input Terminal Pin Assignment

5.1. Input Signal & Power

Connector : FI-RE51S-HF(JAE)

Pin	Symbol	Description	Pin	Symbol	Description
1	Power	DC 12V	26	RE[0]P	Even LVDS Signal +
2	Power	DC 12V	27	RE[1]N	Even LVDS Signal -
3	Power	DC 12V	28	RE[1]P	Even LVDS Signal +
4	Power	DC 12V	29	RE[2]N	Even LVDS Signal -
5	Power	DC 12V	30	RE[2]P	Even LVDS Signal +
6	NC	NOTE 3	31	GND	GND
7	GND	GND	32	ROCLK-	Even LVDS Signal -
8	GND	GND	33	ROCLK+	Even LVDS Signal +
9	GND	GND	34	GND	GND
10	RO[0]N	Odd LVDS Signal -	35	RE[3]N	Even LVDS Signal -
11	RO[0]P	Odd LVDS Signal +	36	RE[3]P	Even LVDS Signal +
12	RO[1]N	Odd LVDS Signal -	37	NC	NC
13	RO[1]P	Odd LVDS Signal +	38	NC	NC
14	RO[2]N	Odd LVDS Signal -	39	GND	
15	RO[2]P	Odd LVDS Signal +	40	SCL	
16	GND	GND	41	SDA	
17	ROCLK-	Odd LVDS Signal -	42	NC	NOTE 1
18	ROCLK+	Odd LVDS Signal +	43	WP	
19	GND	GND	44	SDA	
20	RO[3]N	Odd LVDS Signal -	45	LVDS_SEL	NOTE 2
21	RO[3]P	Odd LVDS Signal +	46	DCC_ENI (Only for LCD)	
22	NC	NC	47	NC	NOTE 1
23	NC	NC	48	NC	
24	GND	GND	49	NC	
25	RE[0]N	Even LVDS Signal -	50	NC	
			51	NC	

Note1) No Connection: This PINS are only used for SAMSUNG internal using.

Note2) LVDS OPTION : If this PIN is HIGH (3.3 V) → Normal LVDS format
 LOW (GND) → JEIDA LVDS format

SEQUENCE : On = VDD(T1) → LVDS Option → Interface Signal(T2)

OFF = Interface Signal(T3) → LVDS Option → VDD

Note3) # Pin 6 : NC (to protect EOS)

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

14/30

Note(1) Pin number starts from Bottom side

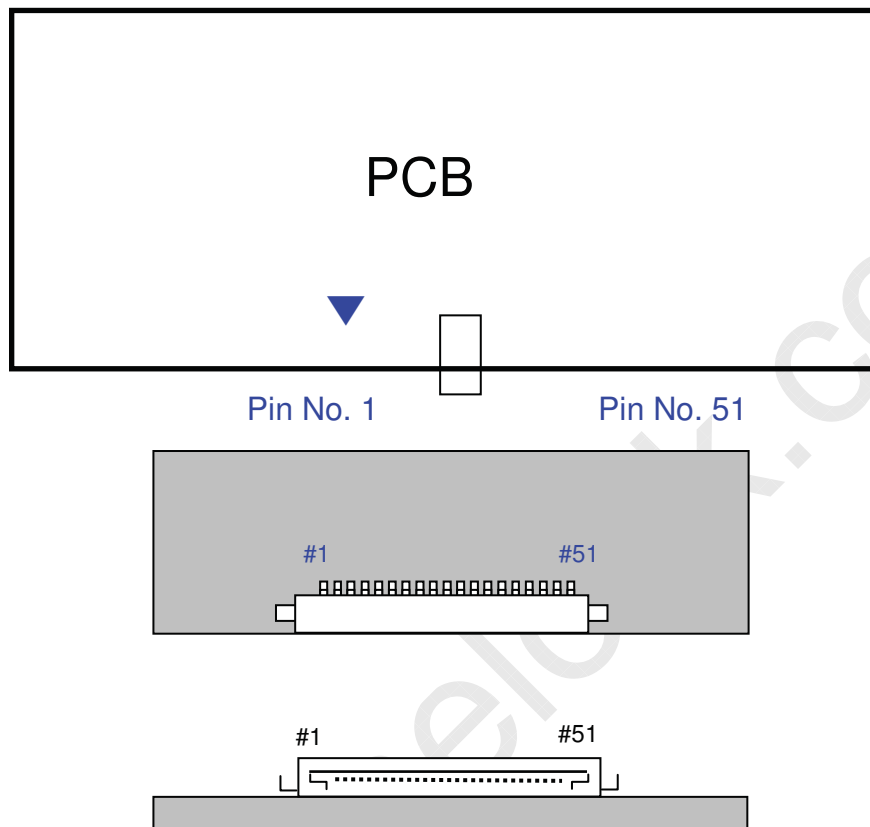


Fig. Connector diagram

- Power GND pins should be connected to the LCD's metal chassis.
- All power input pins should be connected together.
- All NC pin should be separated from other signal or power.


5.2. T-Board

5.2.1 Operation Condition

ITEM	SYMBOL	MIN	TYP	MAX	Note	UNIT	Remark
Input Voltage	HIGH (FET)	380	390	400		Vrms	PFC Voltage (rms)
	LOW (FET)	190	195	200			
Output Current	Io (I_MAX)	14.3	15	15.7	(1)	mArms	DIM=100%
	Duty (I_MIN)	-	20	-	(2)	%	IP B'rd Output
Switching Frequency	fop	44	45	46		kHz	Switching Frequency
Dimming Frequency	fpwm	-	150	-		Hz	IP B'rd Output
Open Lamp Voltage	V _{OPEN} (All Lamp is NC)	1590	-	-	(3)	Vrms	

Note1) Output Current Test Condition : After running 1 hour.

Note2) Dim Duty

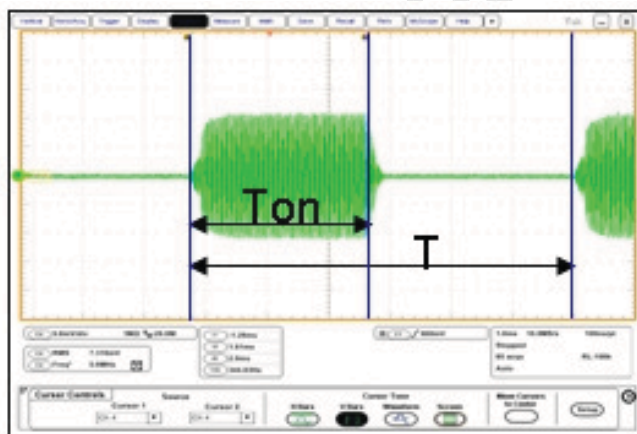

$$\text{Duty (\%)} = \frac{T_{on}}{T} \times 100$$

Note3) Open Voltage Measure Method

: Check Vopen on the Backlight that all lamp is removed.

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

16/30

5.2.2 T- Board Pin map

1) CN1 CONNECTOR : 20037WR-H12 (YEONHO)

Pin NO	SYMBOL	REMARK
1	HIGH (FET)	Switching Pulse (390V, Primary)
2	NC	
3	LOW (FET)	Blocking cap. (195Vdc, Primary)
4	NC	
5	NC	
6	NC	
7	NC	
8	GND	Ground (Secondary)
9	OVP	Over Voltage Protection
10	CNT_PRT	Open Connector Protection (Normal 12V, Active Low)
11	VCC	Power Supply for Protection Circuit (Typical 12V)
12	LD	Lamp Detection (Active Low)

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

17/30

5.3 LVDS Interface

- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA)

	LVDS pin	JEIDA
TxOUT/RxIN0	TxIN/RxOUT0	R4
	TxIN/RxOUT1	R5
	TxIN/RxOUT2	R6
	TxIN/RxOUT3	R7
	TxIN/RxOUT4	R8
	TxIN/RxOUT6	R9
	TxIN/RxOUT7	G4
TxOUT/RxIN1	TxIN/RxOUT8	G5
	TxIN/RxOUT9	G6
	TxIN/RxOUT12	G7
	TxIN/RxOUT13	G8
	TxIN/RxOUT14	G9
	TxIN/RxOUT15	B4
	TxIN/RxOUT18	B5
TxOUT/RxIN2	TxIN/RxOUT19	B6
	TxIN/RxOUT20	B7
	TxIN/RxOUT21	B8
	TxIN/RxOUT22	B9
	TxIN/RxOUT24	HSYNC
	TxIN/RxOUT25	VSYNC
	TxIN/RxOUT26	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R2
	TxIN/RxOUT5	R3
	TxIN/RxOUT10	G2
	TxIN/RxOUT11	G3
	TxIN/RxOUT16	B2
	TxIN/RxOUT17	B3
	TxIN/RxOUT23	RESERVED
TxOUT/RxIN4	<u>TxIN/RxOUT28</u>	<u>R0</u>
	<u>TxIN/RxOUT29</u>	<u>R1</u>
	<u>TxIN/RxOUT30</u>	<u>G0</u>
	<u>TxIN/RxOUT31</u>	<u>G1</u>
	<u>TxIN/RxOUT32</u>	<u>B0</u>
	<u>TxIN/RxOUT33</u>	<u>B1</u>
	<u>TxIN/RxOUT34</u>	RESERVED

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

18/30

5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																								GRAY SCALE LEVEL
		RED							GREEN							BLUE										
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7	
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0	
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1	
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	LIGHT ↓	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253	
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254	
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255	
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1	
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	G2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	LIGHT ↓	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	G253	
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	G254	
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	G255	
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0	
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	B1	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	B2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	LIGHT ↓	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	B253	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B254	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	B255	

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

MODEL	LTF460HN01	Doc. No	07-000-S-101201	Page	19/30
-------	------------	---------	-----------------	------	-------

6. Interface Timing


6.1 Timing Parameters (DE only mode)

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	130	148.5	160	MHz	-
Hsync		F_H	48	67.5	75	KHz	-
Vsync		F_V	45	60	65	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	Lines	(4)
	Vertical Total	T_V	1092	1125	1380	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	Clocks	(4)
	Horizontal Total	T_H	2090	2200	2350	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.


- (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
- (2) Internal $V_{DD} = 3.3V$
- (3) Spread spectrum

6.2 Timing diagrams of interface signal (DE only mode)

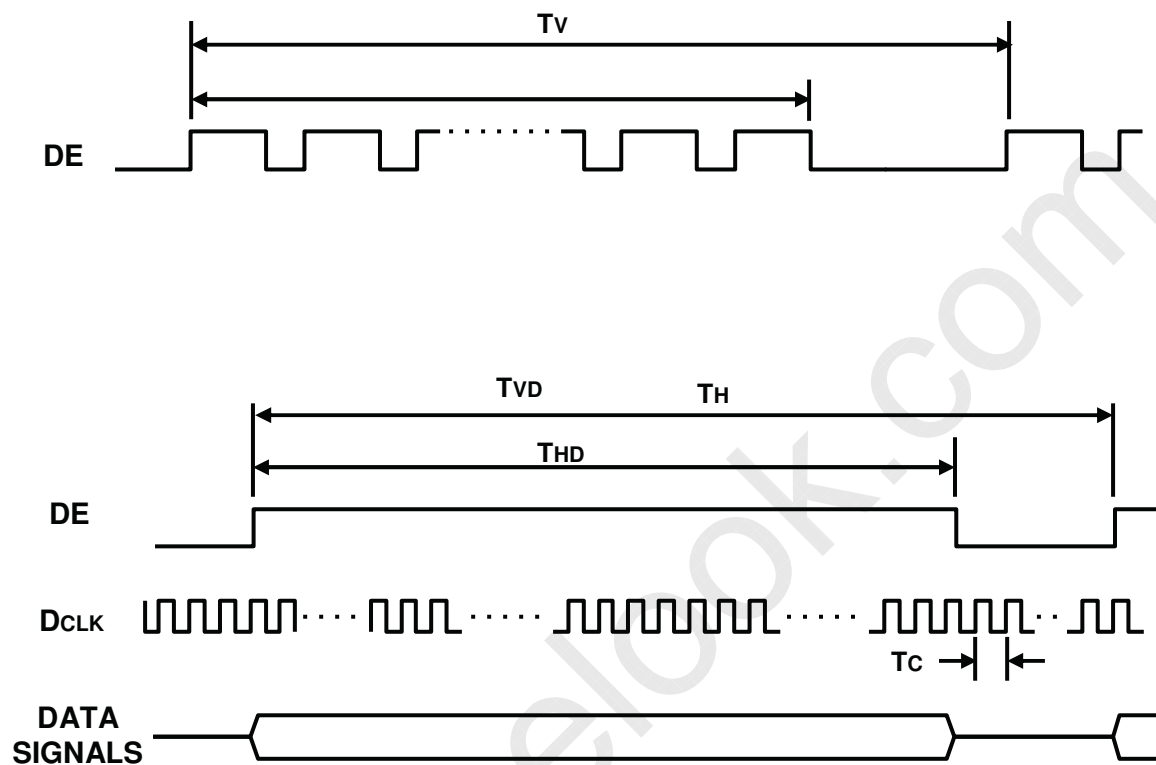

6.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

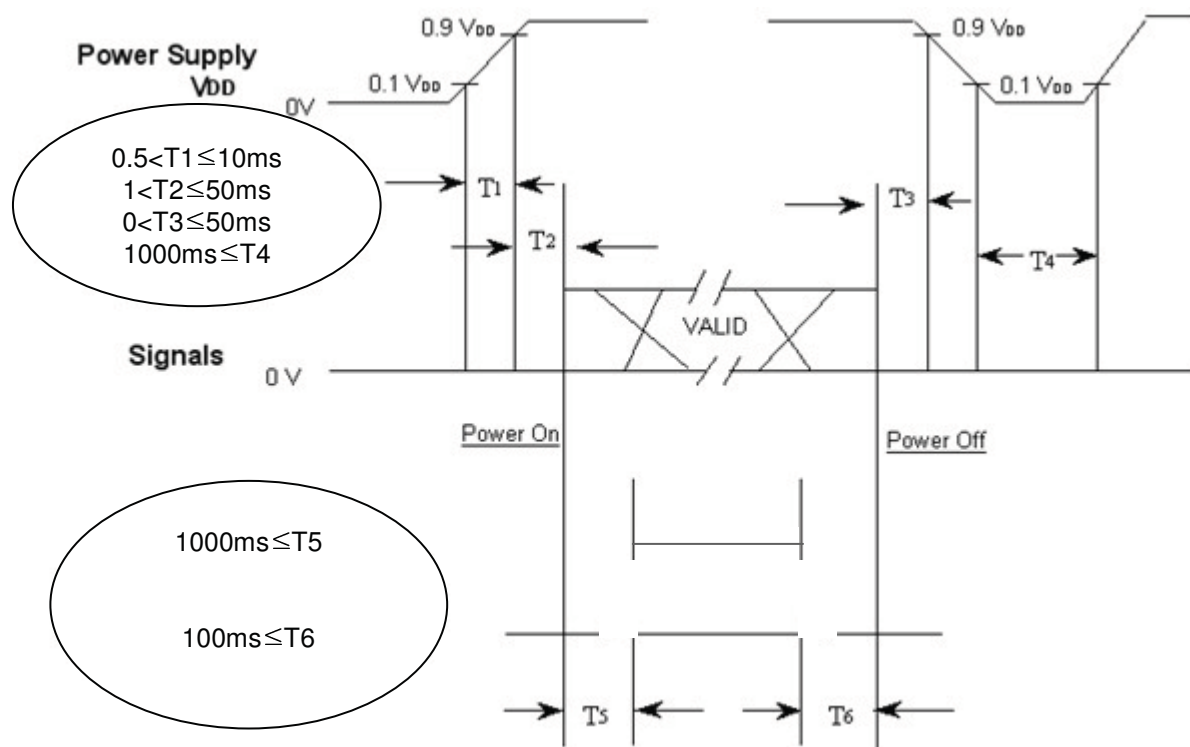

T_1 : V_{DD} rising time from 10% to 90%

T_2 : The time from V_{DD} to valid data at power ON.


T_3 : The time from valid data off to V_{DD} off at power Off.

T_4 : V_{DD} off time for Windows restart

T_5 : The time from valid data to B/L enable at power ON.

T_6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD} .
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- T_4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

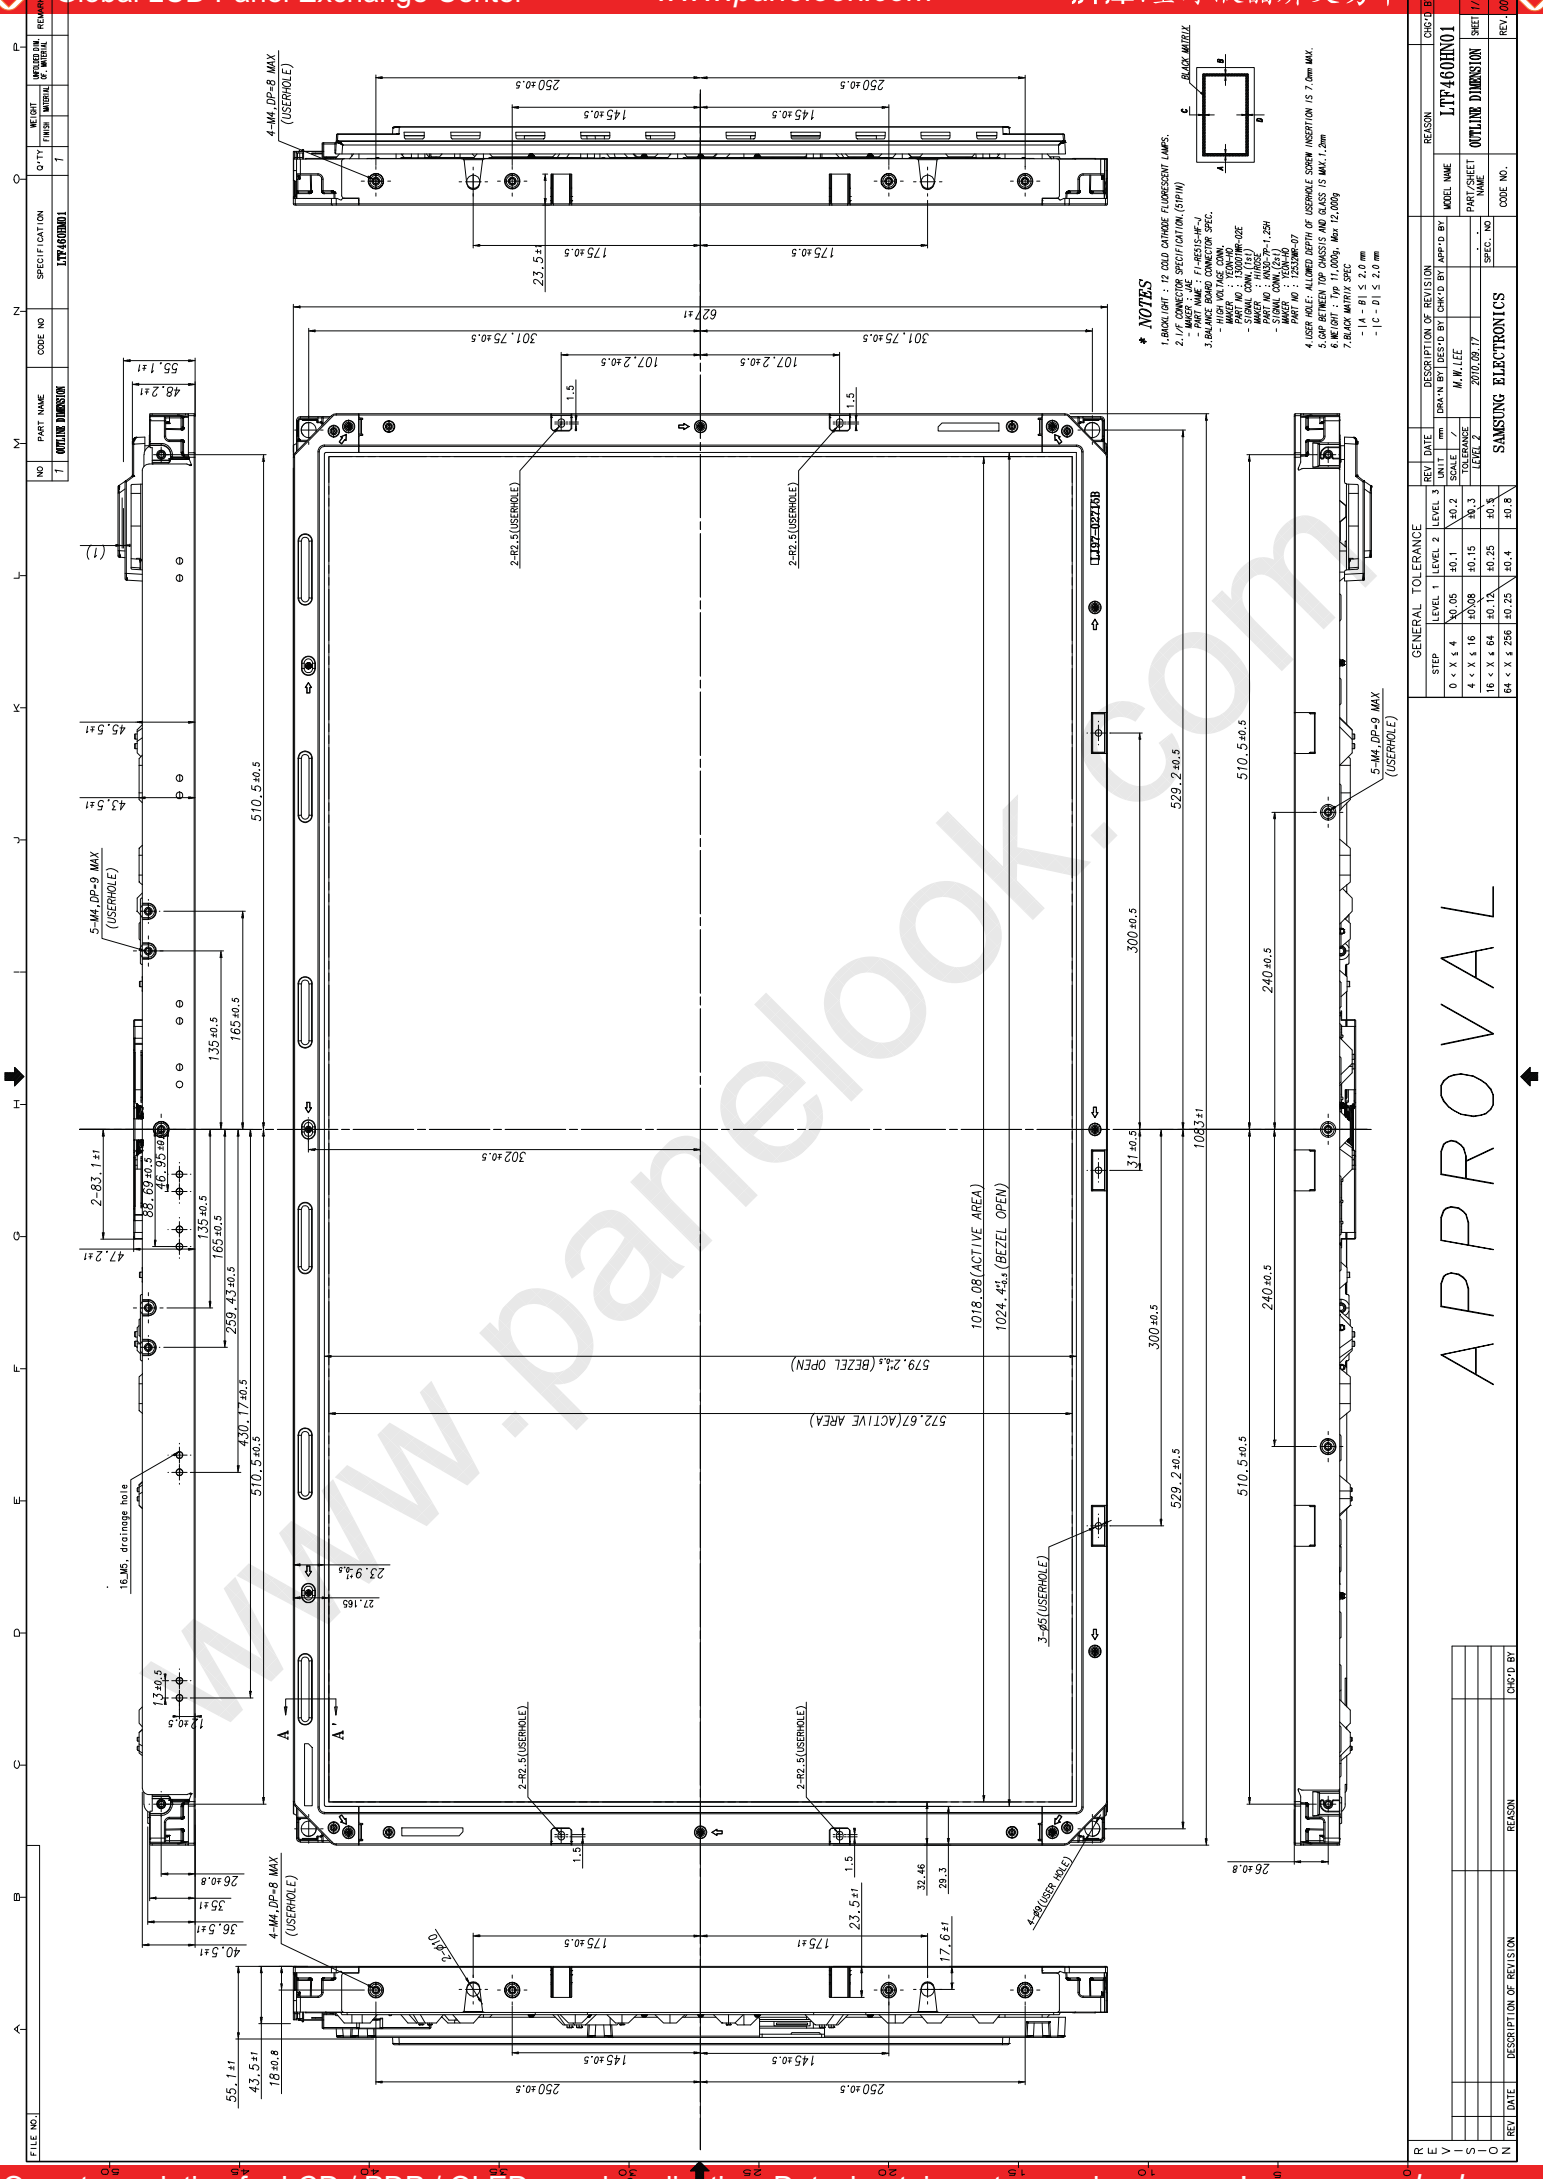

- * NOTES**
1. BACK LIGHT : 12 OLD OUTLINE FLUORESCENT LAMPS.
 2. I/F CONNECTOR SPECIFICATION (GPHN)
 - PART NAME : P-HESIS-4F-1
 - MFG. NO. : 10007M-00E
 - MFG. VOLTAGE : 24V
 - MFG. MATERIAL : ABS
 - MFG. COLOR : BLACK
 - STOCK QTY : 1,250
 - MFG. DATE : 2010.08.07
 - MFG. LOT : 10007M-00E
 3. BALANCE BOARD CONNECTOR SPEC.
 - MFG. VOLTAGE : 24V
 - MFG. MATERIAL : ABS
 - MFG. COLOR : BLACK
 - STOCK QTY : 1,250
 - MFG. DATE : 2010.08.07
 - MFG. LOT : 10007M-00E
 4. USER HOLE: ALLOWED DEPTH OF USER HOLE SCREW INSERTION IS 7.0mm MAX.
 5. GAP BETWEEN TOP CHASSIS AND GLASS IS MAX. 1.2mm.
 6. ME (GPH) : Typ 11.000g, Max 12.000g.
 7. BLACK MARKS SPEC.
 - (A - B) : 5.2.0 mm
 - (C - D) : 5.2.0 mm

REV.	DATE	DESCRIPTION OF REVISION	CHK'D BY
1	2010.08.17	INITIAL DESIGN	M.W. LEE


STEP	LEVEL 1	LEVEL 2	LEVEL 3
0 < X < 4	±0.05	±0.1	±0.2
4 < X < 16	±0.08	±0.15	±0.3
16 < X < 64	±0.12	±0.25	±0.5
64 < X < 256	±0.25	±0.4	±0.8

REV. DATE	DESCRIPTION OF REVISION	CHK'D BY
1	INITIAL DESIGN	M.W. LEE

REV. DATE	DESCRIPTION OF REVISION	CHK'D BY
1	INITIAL DESIGN	M.W. LEE

APPROVAL

FILE NO.	
NO.	7
PART NAME	OUTLINE DIMENSION
CODE NO.	LTP460H01
SPECIFICATION	LTP460H01
QTY.	
REASON	
APPROVAL	
DATE	

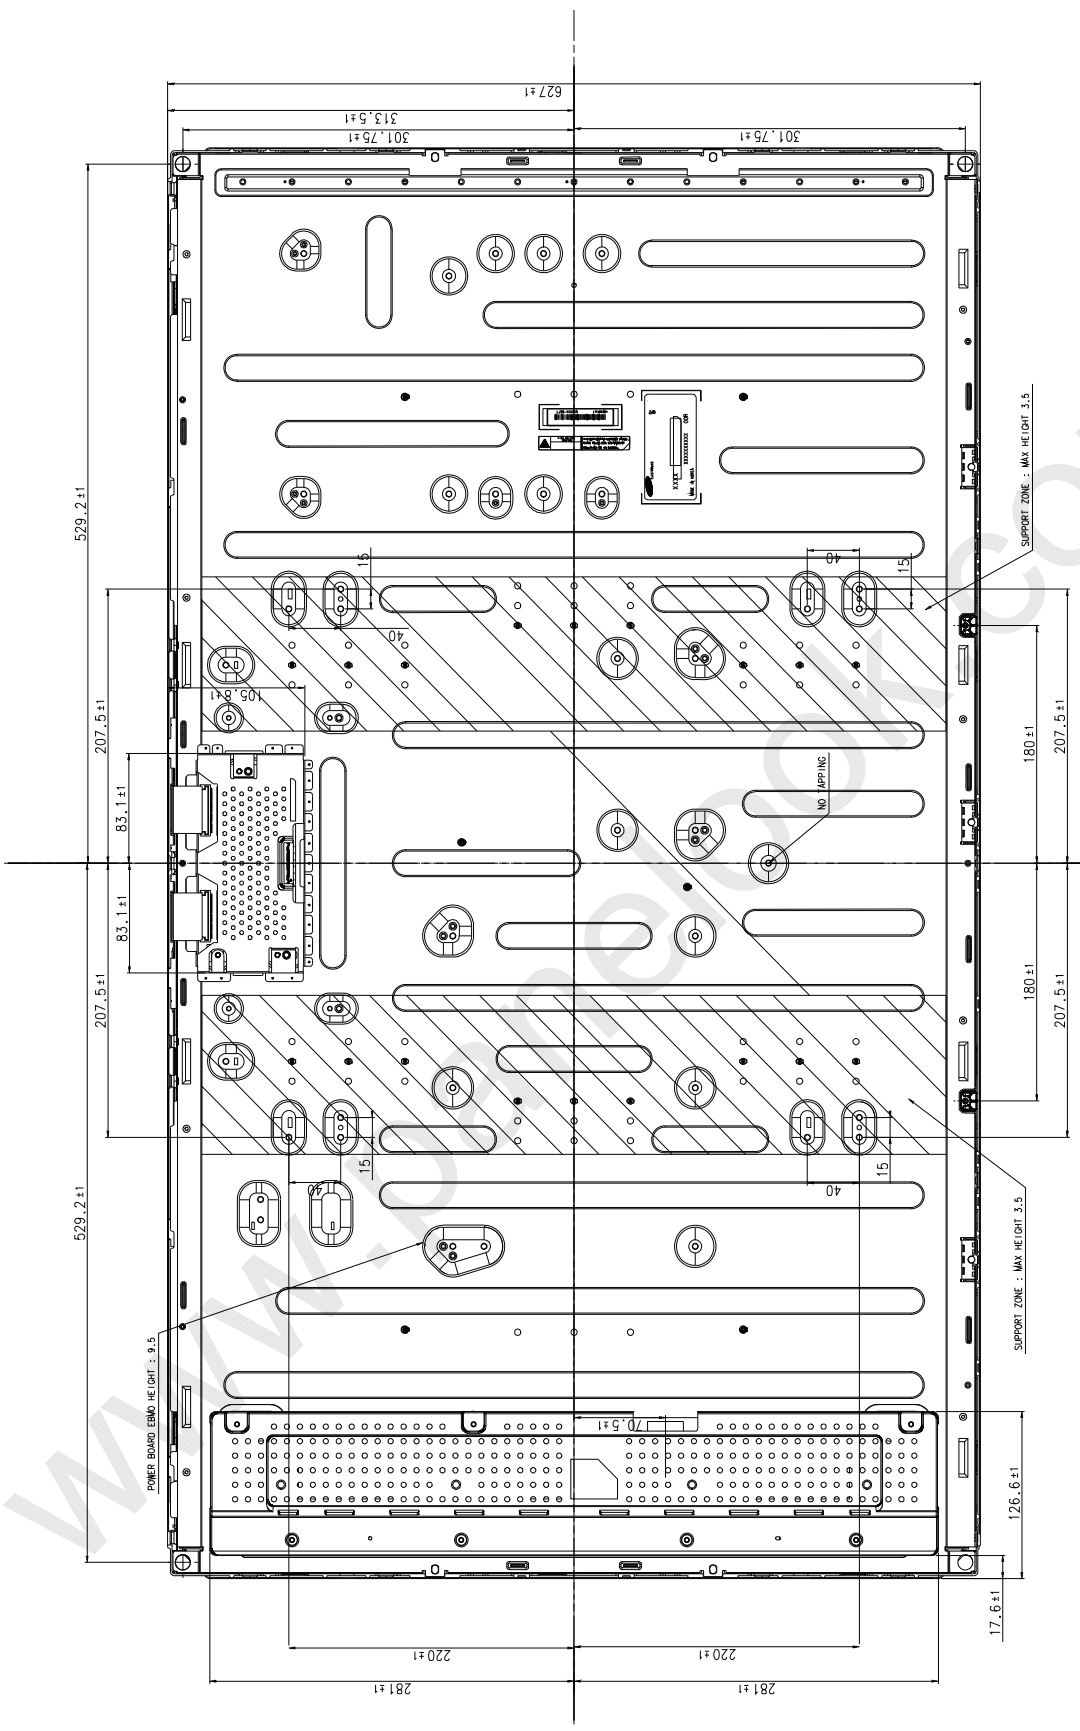

REV.														
IN	REV	DATE	DESCRIPTION OF REVISION	REASON	CHECK BY									
APPROVAL														
SAMSUNG ELECTRONICS														
GENERAL TOLERANCE			LEVEL 1		LEVEL 2		LEVEL 3		REVISION DATE		DESCRIPTION OF REVISION		REASON	
STEP			MAX. VALUE		MIN. VALUE		SCALE		DATE		BY		REASON	
0 × × × 4			±0.05		±0.1		1:1		2023.09.17		M.F.LEE		LTP460H01	
4 × × × 16			±0.08		±0.15		1:1							
16 × × × 64			±0.12		±0.25		1:1							
64 × × × 256			±0.25		±0.4		1:1							
			±0.3		±0.8									

8. Reliability Test

Item	Test condition	Quantity
Temperature Step stress	-20℃ ~ 60℃, 10Cycle, 80hr	4EA
HTOL	50℃ operation, 500hr 60℃ operation, 500hr	8EA
LTOL	-5℃ operation, 500hr	4EA
LTOL 2	-20℃, -10℃ Each condition over 5hr off, over 1hr on	4EA
HTS	70℃ storage, 500hr	4EA
LTS	-25℃ storage, 500hr	4EA
THB	40℃ / 95%RH, 30sec On / Off, 500hr operation	4EA
WHTS	60℃ / 75%RH, 500hr	4EA
Thermal Shock	-20℃ (30min) ~ 60℃ (30min) storage, 200cycle	4EA
ALTITUDE	-10℃ ~ 45℃, 0 ~ 40,000ft, 18hr	2EA
ESD	contact : ± 8 kV, 150pF/330Ω, 200Point, 1 time/Point (operation) non-contact : ± 15 kV, 150pF/330Ω, 200Point, 1 time/Point (operation) Inverter input pin : ± 15 kV, 150pF/330Ω, 3 times/Pin	3EA
Vibration	10~300Hz/1.5G/10minSR, XYZ, 30min/axis	3EA
Shock	11msec, ± XYZ 1time/axis ~15Kg 50G, 11msec 15Kg ~ 20Kg ± XY 40G ± Z 30G, 11msec 20Kg ~ 30G, 11msec	3EA
Noise	On 90 min / Off 90 min	2 EA
Dust	5hr on/off (yellow earth 5sec spread / 5 min precipitation)	2 EA
Short term Image sticking	25~50℃ Mosaic pattern (9*10) 12hr fix	8 EA
Long term Image sticking	50℃ Mosaic pattern (9*10) 504hr fix	4 EA
PALLET Vibration	1.05 Grms, Random, Z axis 1Hr	1PALLET(10EA)
PALLET Drop	20cm, 4Edge(Bottom), 1Face(Bottom)	1PALLET(10EA)

[Result Evaluation Criteria]

Under the display quality test conditions with normal operation state, these should be no change which may affect practical display functions.

- * HTOL/ LTOL : High/Low Temperature Operating Life
- ** THB : Temperature Humidity Bias
- *** HTS/LTS : High/Low Temperature Storage
- **** WHTS : Wet High Temperature Storage

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

25/30


9. PACKING

9.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

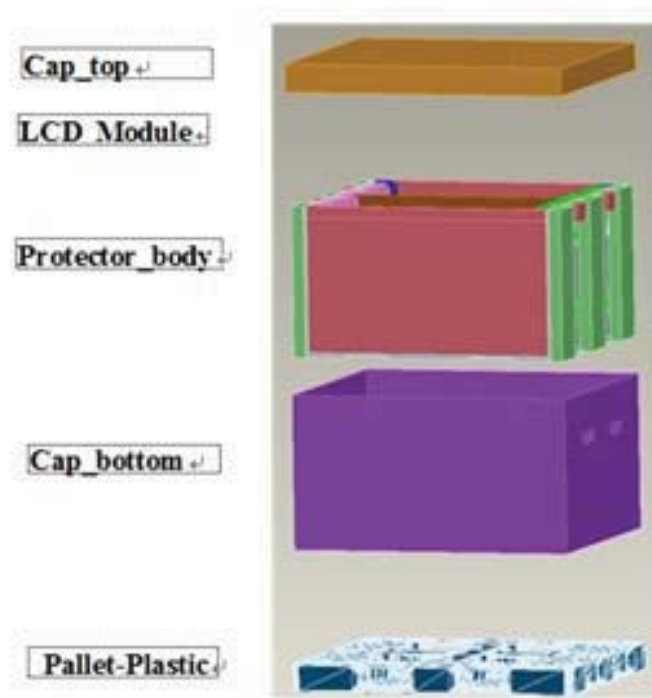

9.2 Packing Specification

ITEM	Specification	Remark
LCD Packing	10ea / Box (Packing-Pallet Box)	1. 11.5 Kg / LCD (10ea) 2. 10 Kg / Protector body (1ea) 3. 7 Kg / Packing-Pallet Box(Bottom/ top) (1ea) 5. Packing-Pallet Box Material : DW, TW
Pallet-Plastic	1Box / Pallet (PE,W1150,L985,H125,BL UE)	1. Pallet weight = 8kg 2. 8 Kg / Pallet
Packing Direction	Vertical	
Pallet size	H x V x height	1245mm(H) x 1130mm(V) x 677mm(height)
Pallet weight	140kg	Pallet (8kg) + Protector body(10kg) + Module (115kg) + Packing-Pallet Box (7kg)

MODEL

LTF460HN01

Doc. No

07-000-S-101201


Page

26/30


10. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


- (1) Part number : LTF460HN01
- (2) Revision: Three letters
- (3) Lot number : X X X X XXX XX X

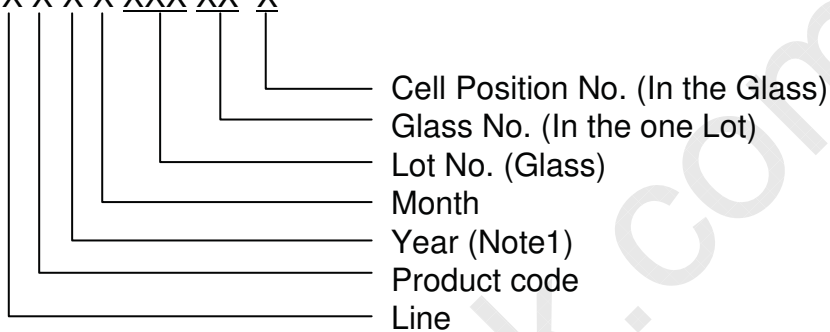

(4) Nameplate Indication

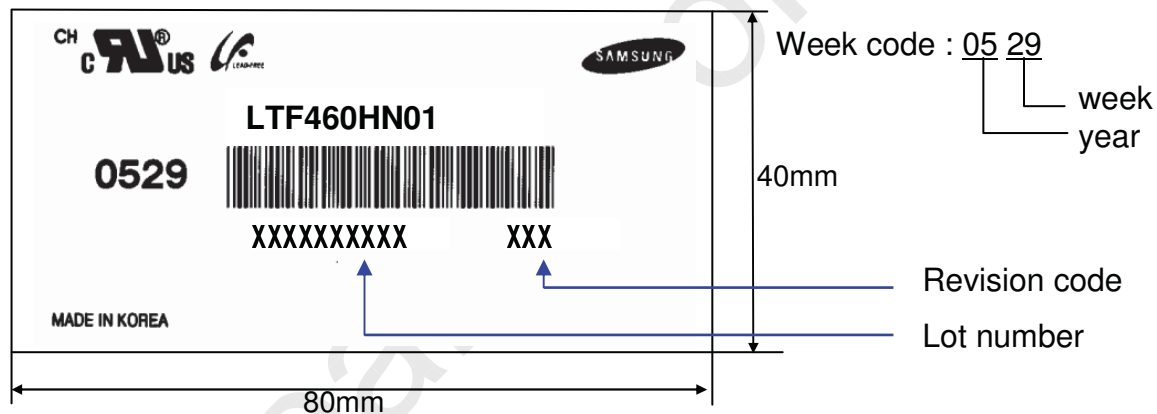

(5) Packing box attach

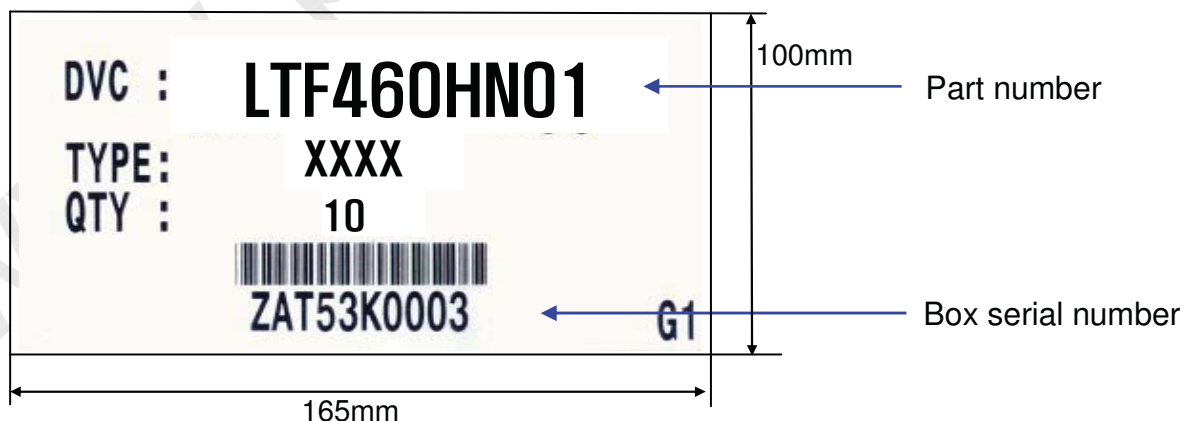

(6) Others

- 1. After service part
 Lamps cannot be replaced because of the narrow bezel structure.

MODEL	LTF460HN01	Doc. No	07-000-S-101201	Page	27/30
-------	------------	---------	-----------------	------	-------

11. General Precautions

11.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module. In addition to damage, this may cause improper operation or damage to the Module and CCFL back light.
- (d) Note that polarizers are very fragile and could be damage easily. Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or Semiconductor would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not disassemble shield case of inverter & LVDS board.
- (m) Do not connect N.C pins. (Samsung internal use only)
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handle a module
- (o) Pins of I/F connector should not be touched directly with bare hands.

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

28/30

11.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

11.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage(Vs).

11.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
 - Temperature : 20 ± 15 °C
 - Humidity : 55 ± 20 %
 - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LTF460HN01	Doc. No	07-000-S-101201	Page	29/30
-------	------------	---------	-----------------	------	-------



11.5 Others

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL

LTF460HN01

Doc. No

07-000-S-101201

Page

30/30