



DATA DISPLAY GROUP

Datasheet

Samsung

LTI460HJ01

SA-01-236

Version 1.0

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.



Samsung Confidential

Product Information

DATE : Sep.20,2010

SAMSUNG TFT-LCD

MODEL : LTI460HJ01

The Information Described in this Specification is Preliminary and can be changed without prior notice

Samsung confidential
For Distec only

APPROVED BY Je-Hwan Oh	DATE Sep.20,2010	PREPARED BY Young-Do Choi	DATE Sep.20,2010
----------------------------------	---------------------	-------------------------------------	---------------------

Application Engineering Part 3, LCD Division

Samsung Electronics Co . , LTD.

MODEL	LTI460HJ01	Doc. No	05-000-G-100920	Page	1 / 30
-------	------------	---------	-----------------	------	--------

Contents

Samsung Confidential

Revision History	(3)
General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Application information for DID (Digital Information Display)	(7)
3. Optical Characteristics	(8)
4. Electrical Characteristics	(11)
4.1 TFT LCD Module	
4.2 Back Light Unit	
4.3 LED Lips Condition & Specification	
4.4 Block Diagram	
5. Input Terminal Pin Assignment	(15)
5.1 LVDS Connector	
5.2 LED Input and Output Pin Configuration	
5.3 LED drive DC-DC converter Power Sequence	
5.4 LVDS Interface	
5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color	
6. Interface Timing	(21)
6.1 Timing Parameters (DE mode)	
6.2 Timing Diagrams of interface Signal (DE mode)	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	(24)
8. Packing	(26)
9. Marking & Others	(27)
10. General Precaution	(28)
10.1 Handling	
10.2 Storage	
10.3 Operation	
10.4 Operation Condition Guide	
10.5 Others	

*** Revision History**

Date	Rev. No	Page	Summary
Aug 11, 2010	000	all	First issued
Aug 20, 2010	000	5	Changing LED Absolute Maximum Rating value Tj: 110 → 78 °C Rth : 27 → 23 K/W
Sep 20, 2010	000	11	Electrical Characteristics: TBD → Input values
		13	LED converter spec. : TBD → Input values
		21	Timing parameters : TBD → Input values

Samsung confidential
For Distec only

General Description

Samsung Confidential

Description

LTI460HJ01 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT (Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a backlight unit. The resolution of a 46.0" is 1920 x 1,080 and this model can display up to 16.7 million colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV, Display terminals for AV application products, and Digital Information Display (DID).

Features

- RoHS compliance (Pb-free)
- High contrast ratio, High luminance
- SPVA (Super Patterned Vertical Align) mode
- Wide viewing angle ($\pm 178^\circ$)
- High speed response (120Hz)
- Landscape / Portrait type compatible
- FHD (1920 x 1080 pixels) resolution (16:9)
- Low power consumption
- White LED Backlight (224pcs)
- DE (Data Enable) mode
- 4ch LVDS (Low Voltage Differential Signaling) interface

General Information

Items	Specification	Unit	Note
Module Size	1054.5(H _{TYP}) x 609.3(V _{TYP})	mm	$\pm 1.0\text{mm}$
	10.8 (Min), 31.65 (with converter)		$\pm 1.0\text{mm}$
Weight	11,000	g	Max
Pixel Pitch	0.53025(H) x 0.53025(V)	mm	
Active Display Area	1018.353(H) x 572.544(V)	mm	
Surface Treatment	Haze 44% , Hard-coating (3H)		
Display Colors	10 bit - 1.07Billion	colors	
Number of Pixels	1920 x 1080	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	600 (Typ.)	cd/m ²	

MODEL

LTI460HJ01

Doc. No

05-000-G-100920

Page

4 / 30

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

1.1 Environmental absolute Maximum Ratings

Item		Symbol		Min.	Max.	Unit	Note
Power Supply Voltage		V _{DD}		GND-0.5	13.2	V	(1)
Storage temperature		T _{STG}		-20	60	℃	(2)
Glass surface temperature (Operation)	Center	T _{CENTER}		0	50	℃	(2),(5)
	T. Uniformity	△T		-	10	℃	
Shock (non-operating)		S _{nop}	X,Y	-	40	G	(3)
			Z	-	30		
Vibration (non-operating)		V _{nop}		-	1.5	G	(4)

1.2 LED Unit absolute Maximum Ratings

Item	Symbol	Max.	Unit	Note
Operating Temperature Range	Top	-30 ~85	°C	-
Storage Temperature Range	T_{STG}	-40 ~ 100	°C	-
Junction Temperature	T_j	78	°C	-
Forward Current	If	460	mA	@Bar
	Ifp	600	mA	@Bar
Forward Voltage	Vf	92.4	V	-
	Vfp	100.8	V	-
Thermal Resistance, Junction to PCB	$R_{th,JS}$	23	K/W	-

- Note (1) $T_a = 25 \pm 2^\circ\text{C}$
(2) Temperature and relative humidity range are shown in the figure below.
a. 90 % RH Max. ($T_a \leq 39^\circ\text{C}$)
b. Relative Humidity is 90% or less. ($T_a > 39^\circ\text{C}$)
c. No condensation
(3) 11ms, sine wave, one time for $\pm X, \pm Y, \pm Z$ axis
(4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis


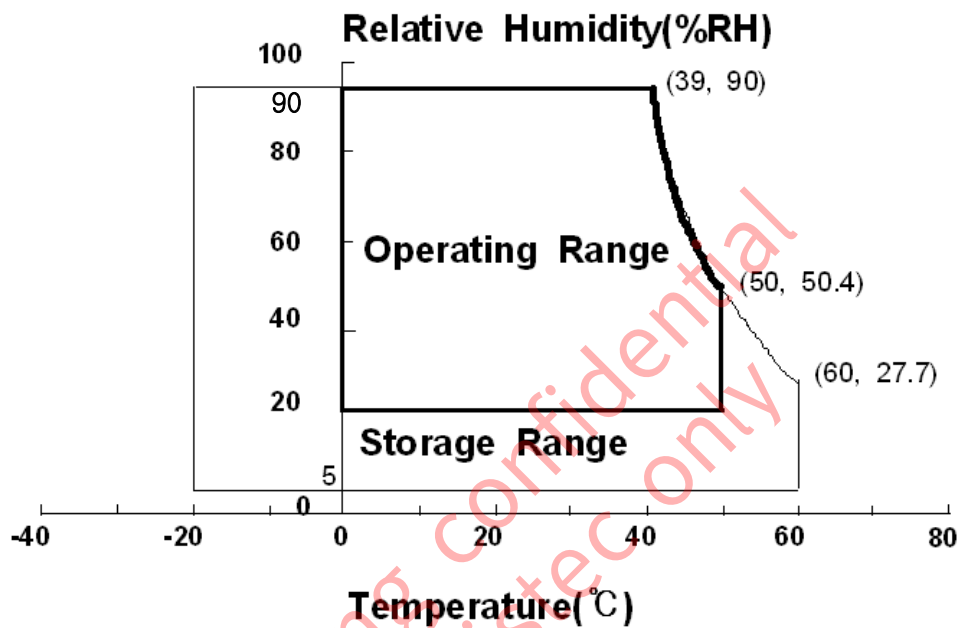


Fig. Temperature and Relative humidity range

(5) Definition of test point

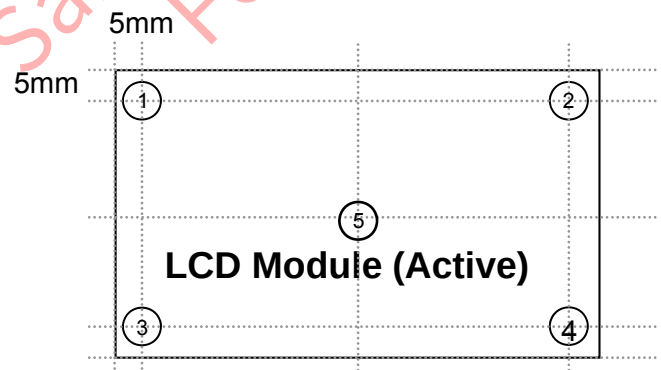

ΔT should be less than 10°C ($\Delta T = |T_{\text{CENTER}} - T_{\text{CORNER}}|$)

T_{CENTER} : Temperature of the center of the glass surface (Test point 5)
 T_{CORNER} : Temperature of each edge of the glass surface (Test point 1~4)

2. Application information for DID (Digital Information Display)

A long-term display like DID application may cause uneven display including image retention. To optimize module's lifetime and function, several operating usages are required.

1. Normal operating condition

- Temperature: $20 \pm 15^{\circ}\text{C}$
- Humidity: $55 \pm 20\%$
- Display pattern: moving picture or regular switchover display

Note) Long-term static information image may cause uneven display.

2. Operating usages under abnormal operating condition. Note (1)

- a. Ambient condition
 - Well-ventilated place is recommended to set up DID system.
- b. Power off and screen saver
 - Periodical power-off or screen saver is needed after long-term static display. Note (2)

3. Operating usages to protect uneven display due to long-term static information display

- a. Suitable operating time for P-DID : under 20 hours a day.
- b. Periodical display contents change from static image to moving picture.
 - Liquid crystal refresh time is required.
- c. Periodical background color and character (image) color change
 - Use different colors for background and character (image), respectively.
 - Change colors periodically.
- d. Avoid combination of background and character with large different luminance.

Note (1) Abnormal condition means every operating condition except normal operating condition.

Note (2) Moving picture or black pattern is strongly recommended for screen saver.

4. Lifetime in this spec is guaranteed only when DID is used under right operating usages.

MODEL	LT1460HJ01	Doc. No	05-000-G-100920	Page	7 / 30
-------	------------	---------	-----------------	------	--------

3. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON BM-7, SPECTRORADIOMETER SR-3

(Ta = 25 ± 2 °C, V_{DD} = 12V, f_V = 120Hz, f_{DCLK} = 297 MHz)


Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R	Normal $\theta_{\text{L,R}}=0$ $\theta_{\text{U,D}}=0$ Viewing Angle	2500	3000	-		(3) SR-3
Response Time	G-to-G	Tg		-	10	13	msec	(5) BM-7
Luminance of White (Center of screen)		Y _L		500	600	-	cd/m ²	(6) SR-3
Color Chromaticity (CIE 1931)	Red	R _x		TYP. -0.03	0.621	TYP. +0.03		(7),(8) SR-3
		R _y			0.333			
	Green	G _x			0.305			
		G _y			0.631			
	Blue	B _x			0.154			
		B _y			0.049			
	White	W _x			0.271			
		W _y			0.294			
Color Gamut		-	-	72	-	%	(7) SR-3	
Color Temperature		-	-	10000	-	K	(7) SR-3	
Viewing Angle	Hor.	θ_{L}	C/R≥10	75	89	-	Degree	(8) SR-3
		θ_{R}		75	89	-		
	Ver.	θ_{U}		75	89	-		
		θ_{D}		75	89	-		
Brightness Uniformity (9 Points)		B _{uni}		-	-	25	%	(4) SR-3

Note (1) Test Equipment Setup


The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the backlight at the given temperature for stabilization of the backlight. This should be measured in the center of screen.

LED current : 460mA (for 1ea LED bar)

Environment condition : Ta = 25 ± 2 °C

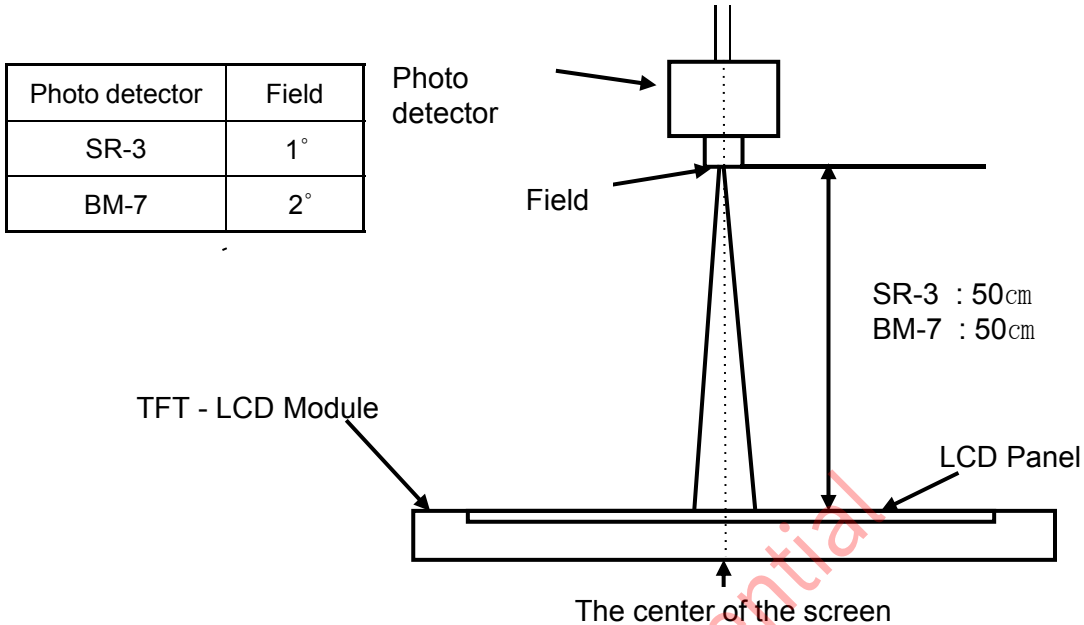

Note (2) Definition of test point

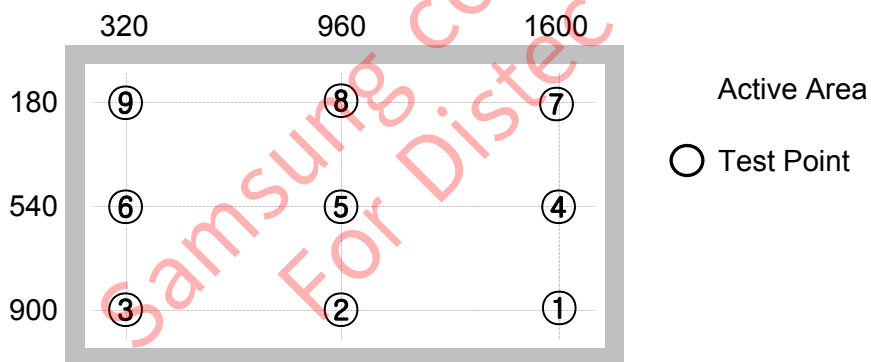

Note (3) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C / R = \frac{G \max}{G \min}$$

Gmax : Luminance with all pixels white


Gmin : Luminance with all pixels black

Note (4) Definition of 9 points brightness uniformity

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

Bmax : Maximum brightness
Bmin : Minimum brightness


Note (5) Definition of Response time : Sum of Tr, Tf

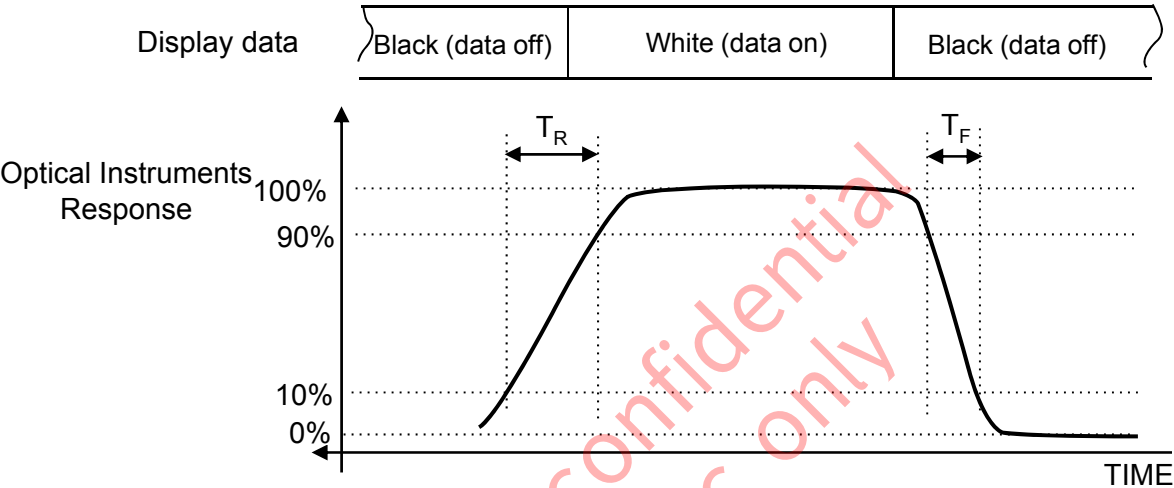

Note (6) Definition of Luminance of White : Luminance of white at center point ⑤

Note (7) Definition of Color Chromaticity (CIE 1931)
Color coordinate of Red, Green, Blue & White at center point ⑤

Note (8) Definition of Viewing Angle
: Viewing angle range (C/R ≥ 10)

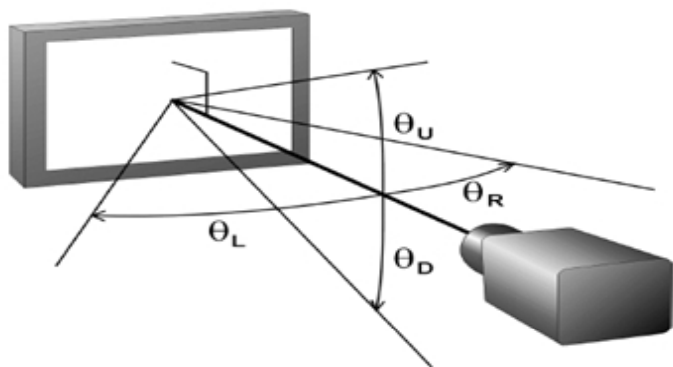

4. Electrical Characteristics

4.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^{\circ}\text{C} \pm 2^{\circ}\text{C}$


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V _{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I _{DD}	-	500	-	mA	(2),(3) (w/o converter)
	(b) White		-	482	-	mA	
	(c) N pattern		-	780	860	mA	
Vsync Frequency		f _V	-	120	-	Hz	
Hsync Frequency		f _H	120	135	140	kHz	
Main Frequency		f _{DCLK}	260	297	305	MHz	
Rush Current		I _{RUSH}	-	-	6	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD} .

(2) $f_V = 120\text{Hz}$, $f_{DCLK} = 297\text{MHz}$, $V_{DD} = 12.0\text{V}$, DC Current.

(3) Power dissipation check pattern (LCD Module only)


a) Black Pattern




b) White Pattern



c) N Pattern



(4) Measurement Conditions

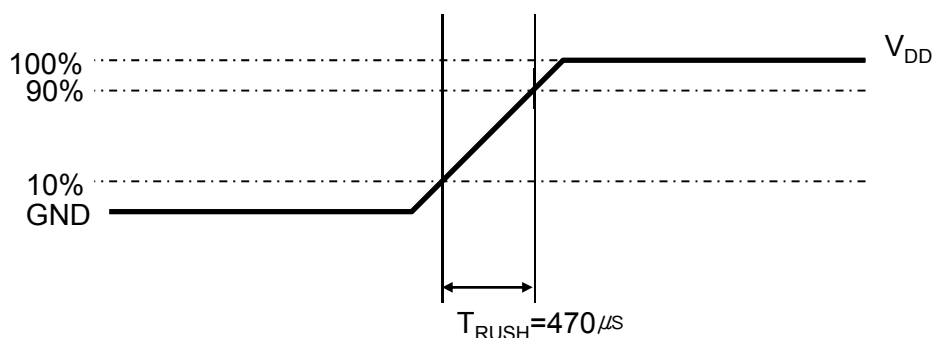

Rush Current I_{RUSH} can be measured when T_{RUSH} is $470\mu\text{s}$.

4.2 Back Light Unit


The backlight unit contains 224 WLEDs (White Light Emitting Diode).

Ta=25 ± 2°C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	50,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : Ta = 25±2°C]

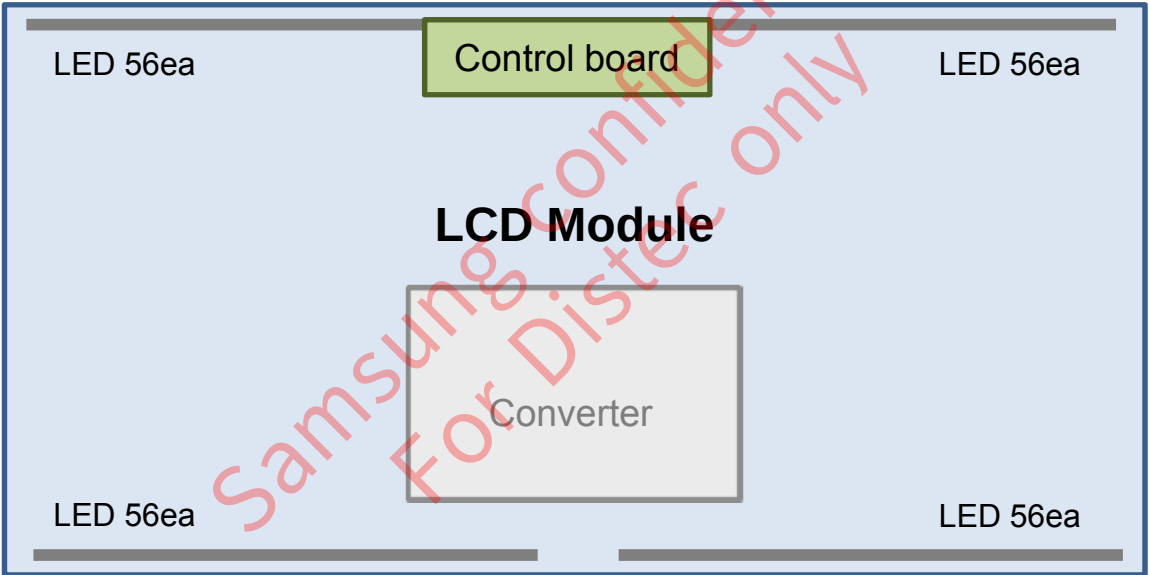

4.3 LED Converter Condition & Specification


Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	V _{in}	-	21.6	24.0	26.4	V	Ta=25±2 °C
Input Current	I _{in}	V _{in} = 24.0V V _{dim} = 3.3V	-	-	7.5	Adc	After 1 hour Warm-up
Output Current	I _{LED}	V _{in} = 24.0V V _{dim} = 3.3V	130	140	150	mA _{mean}	
Frequency	F _{OP}	V _{in} = 24.0V	150	200	250	kHz	
Backlight On/Off	ON	V _{in} = 24.0V	2.4	-	5.25	V	
	OFF	V _{in} = 24.0V	0	-	0.8		
Dimming Control	V _{DIM}	Max Lum	3.3	-	-	V	
		Min. Lum	-	-	0		
Dim freq.	f _{DIM}	V _{in} = 24.0V	140	150	160	Hz	

Note (1) Power Consumption is measured at 600[cd/m²] of luminance condition which is the typical luminance value. Lamp Current is measured at the point before Lamp.

※ Additional Appendix for supply current

Items	Symbol	Conditions	Specifications			Unit
			Min.	Typ.	Max.	
Input Current	I _{IN_overshoot}	V _{IN} =24V, DIM=3.3V (Within 1hr at LED ON)	-	4.5	4.6	Adc
	I _{IN_saturation}	V _{IN} =24V, DIM=3.3V (After 1hr Aging)	-	4.4	4.5	

4.4 Block Diagram

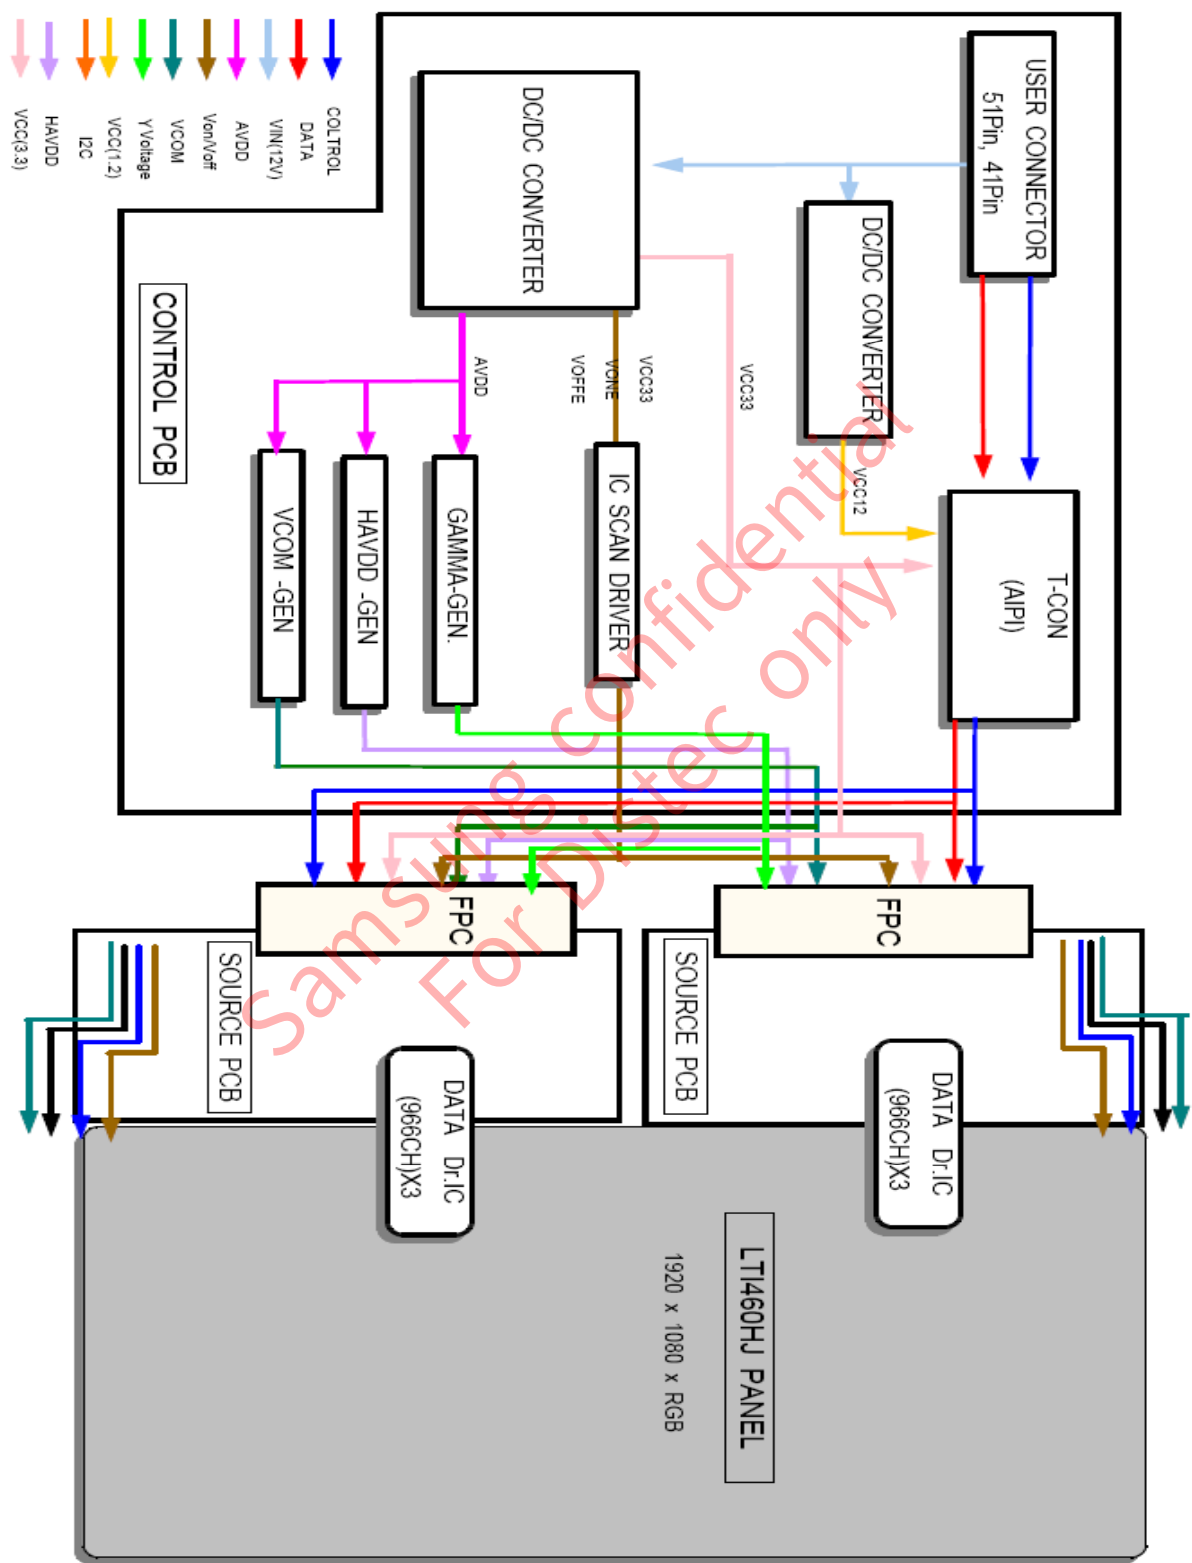

5. Input Terminal Pin Assignment

5.1 Input Signal & Power

Connector : FI-RE41S-HF (JAE)

PIN No.	Description		PIN No.	Description	
1	Vdd (12V)		26	Odd LVDS Signal	Rx3[0]P
2	Vdd (12V)		27		Rx3[1]N
3	Vdd (12V)		28		Rx3[1]P
4	Vdd (12V)		29		Rx3[2]N
5	Vdd (12V)		30		Rx3[2]P
6	No Connection(1)		31		GND
7	GND		32		Rx3CLK-
8	GND		33		Rx3CLK+
9	GND		34		GND
10	Odd LVDS Signal	Rx1[0]N	35		Rx3[3]N
11		Rx1[0]P	36		Rx3[3]P
12		Rx1[1]N	37		Rx3[4]N
13		Rx1[1]P	38		Rx3[4]P
14		Rx1[2]N	39	GND	
15		Rx1[2]P	40	No Connection (1)	
16		GND	41	No Connection(1)	
17		Rx1CLK-			
18		Rx1CLK+			
19		GND			
20		Rx1[3]N			
21		Rx1[3]P			
22		Rx1[4]N			
23		Rx1[4]P			
24	GND				
25	Odd LVDS	Rx3[0]N			

Note (1) No Connection :These pins are only used for SAMSUNG internal purpose.

Connector : FI-RE51S-HF (JAE)

PIN No.	Description		PIN No.	Description	
1	Vdd (12V)		26	Odd LVDS Signal	Rx4[0]P
2	Vdd (12V)		27		Rx4[1]N
3	Vdd (12V)		28		Rx4[1]P
4	Vdd (12V)		29		Rx4[2]N
5	Vdd (12V)		30		Rx4[2]P
6	No Connection(1)		31		GND
7	GND		32		Rx4CLK-
8	GND		33		Rx4CLK+
9	GND		34		GND
10	Odd LVDS Signal	Rx2[0]N	35		Rx4[3]N
11		Rx2[0]P	36		Rx4[3]P
12		Rx2[1]N	37		Rx4[4]N
13		Rx2[1]P	38		No Connection(1)
14		Rx2[2]N	39	GND	
15		Rx2[2]P	40	No Connection (1)	
16		GND	41	No Connection(1)	
17		Rx2CLK-	42	No Connection (1)	
18		Rx2CLK+	43	No Connection(1)	
19		GND	44	No Connection (1)	
20		Rx2[3]N	45	LVDS_SEL (2)	
21		Rx2[3]P	46	DCC On/Off option(3)	
22		Rx2[4]N	47	No Connection(1)	
23		No Connection(1)	48	No Connection(1)	
24	GND		49	No Connection (1)	
25	Even LVDS	Rx4[0]N	50	No Connection(1)	
			51	No Connection (1)	

Note 1) No Connection : These pins are only used for SAMSUNG internal purpose.

Note 2) LVDS OPTION : IF THIS PIN : HIGH (3.3 V) → NORMAL NS LVDS FORMAT
OTHERWISE : LOW (GND) OR OPEN(NC) → JEIDA LVDS FORMAT

Note 3) DCC Option : IF THIS PIN : HIGH (3.3 V) → DCC off
OTHERWISE : LOW (GND) OR Open(NC) → DCC on

Sequence : On = $V_{DD}(T1) \geq \text{LVDS Option} \geq \text{Interface Signal}(T2)$
OFF = $\text{Interface Signal}(T3) \geq \text{LVDS Option} \geq V_{DD}$

Note (3) LVDS Connector

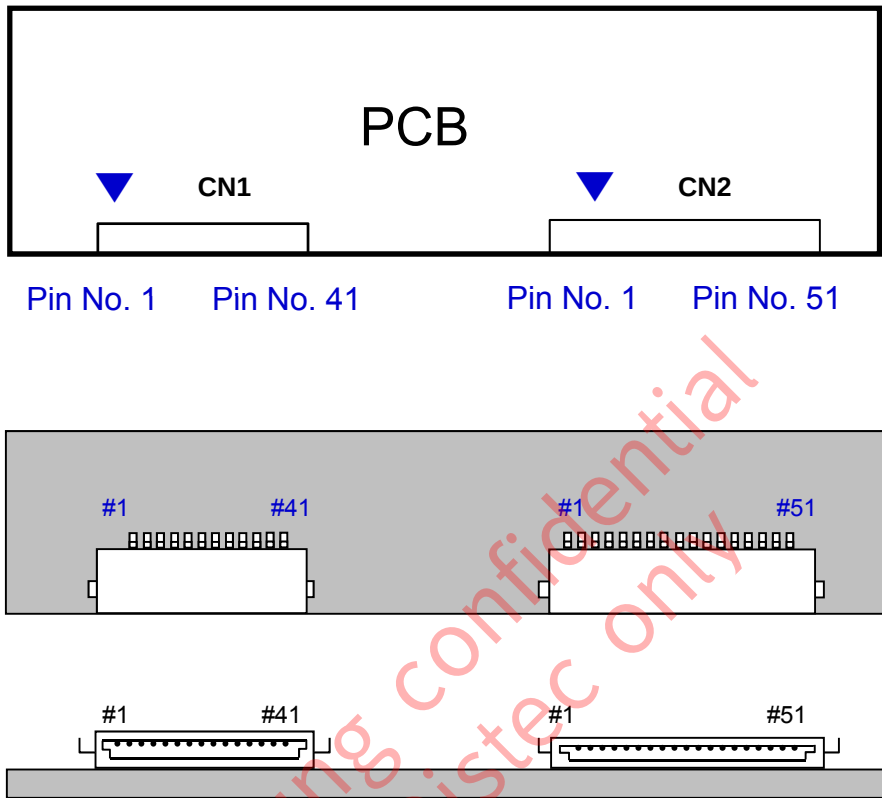



Fig. Connector diagram

- a. All GND pins should be connected together and also be connected to the LCD's metal chassis.
- b. All power input pins should be connected together.
- c. All N.C pins should be separated from other signal or power.

5.2 LED Converter input & output Pin Configuration

Pin No.	Pin Configuration(FUNCTION)
1	Vin (24V)
2	Vin (24V)
3	Vin (24V)
4	Vin (24V)
5	Vin (24V)
6	GND
7	GND
8	GND
9	GND
10	GND
11	No Connection
12	ENA (Converter on/off Control signal)
13	Dimming Control [0V: Min, 3.3V: Max]
14	No Connection

5.3 LED drive DC-DC converter Power Sequence

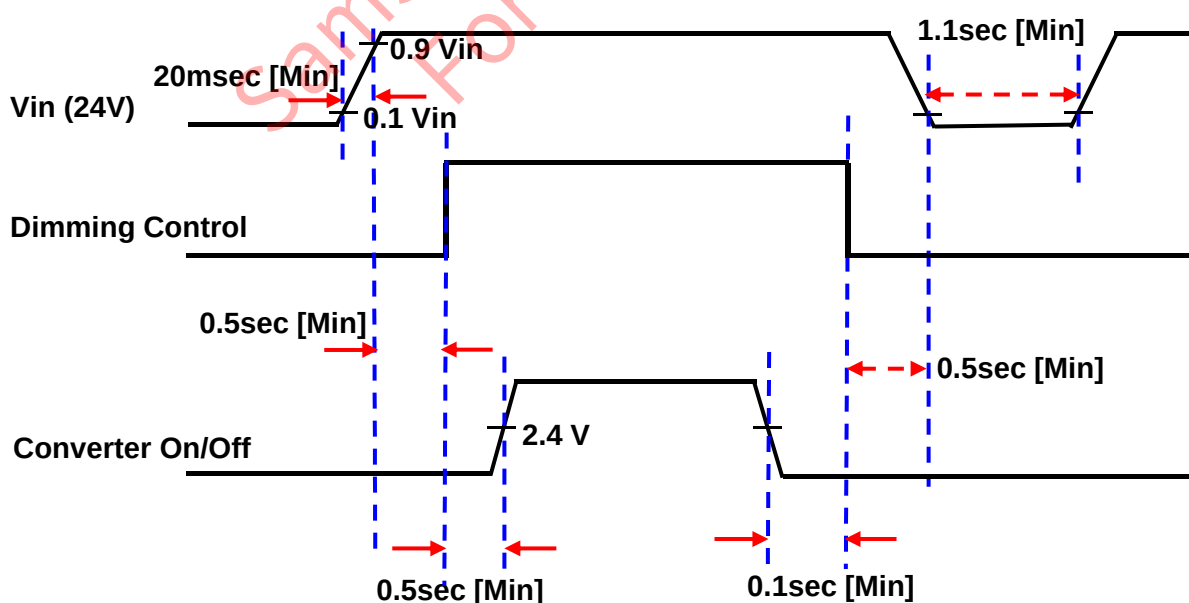

5.4 LVDS Interface

Samsung Confidential

- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA & Normal)

Default LVDS Option : JEIDA

	LVDS pin	JEIDA -DATA	VESA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2	R0
	TxIN/RxOUT1	R3	R1
	TxIN/RxOUT2	R4	R2
	TxIN/RxOUT3	R5	R3
	TxIN/RxOUT4	R6	R4
	TxIN/RxOUT6	R7	R5
	TxIN/RxOUT7	G2	G0
TxOUT/RxIN1	TxIN/RxOUT8	G3	G1
	TxIN/RxOUT9	G4	G2
	TxIN/RxOUT12	G5	G3
	TxIN/RxOUT13	G6	G4
	TxIN/RxOUT14	G7	G5
	TxIN/RxOUT15	B2	B0
	TxIN/RxOUT18	B3	B1
TxOUT/RxIN2	TxIN/RxOUT19	B4	B2
	TxIN/RxOUT20	B5	B3
	TxIN/RxOUT21	B6	B4
	TxIN/RxOUT22	B7	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R0	R6
	TxIN/RxOUT5	R1	R7
	TxIN/RxOUT10	G0	G6
	TxIN/RxOUT11	G1	G7
	TxIN/RxOUT16	B0	B6
	TxIN/RxOUT17	B1	B7
	TxIN/RxOUT23	RESERVED	RESERVED

MODEL

LT1460HJ01

Doc. No

05-000-G-100920

Page

19 / 30

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																										GRAY SCALE LEVEL
		RED								GREEN								BLUE										
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7			
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-	
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-	
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-	
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-	
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-	
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-	
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0	
	DARK ↑ ↓ LIGHT	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1	
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:			
		1	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253	
	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254		
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255	
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	DARK ↑ ↓ LIGHT	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1	
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:			
		0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G253	
	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G254		
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G255	
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0	
	DARK ↑ ↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	B1	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B252	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:			
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	B253	
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	B254		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	B255	

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

6. Interface Timing


6.1 Timing Parameters (DE mode)

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Clock	Frequency	$1/T_C$	260	297	305	MHz	2Pix/clock
Hsync		F_H	120	135	140	KHz	-
Vsync		F_V	-	120	-	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	Lines	-
	Vertical Total	T_V	1092	1125	1350	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	Clocks	-
	Horizontal Total	T_H	2090	2200	2350	Clocks	-

Note) This product is DE mode. And, the input of Hsync & Vsync signal is necessary on normal operation.


Test Point : TTL control signal and CLK at LVDS Tx input terminal in system

6.2 Timing diagrams of interface signal (DE mode)

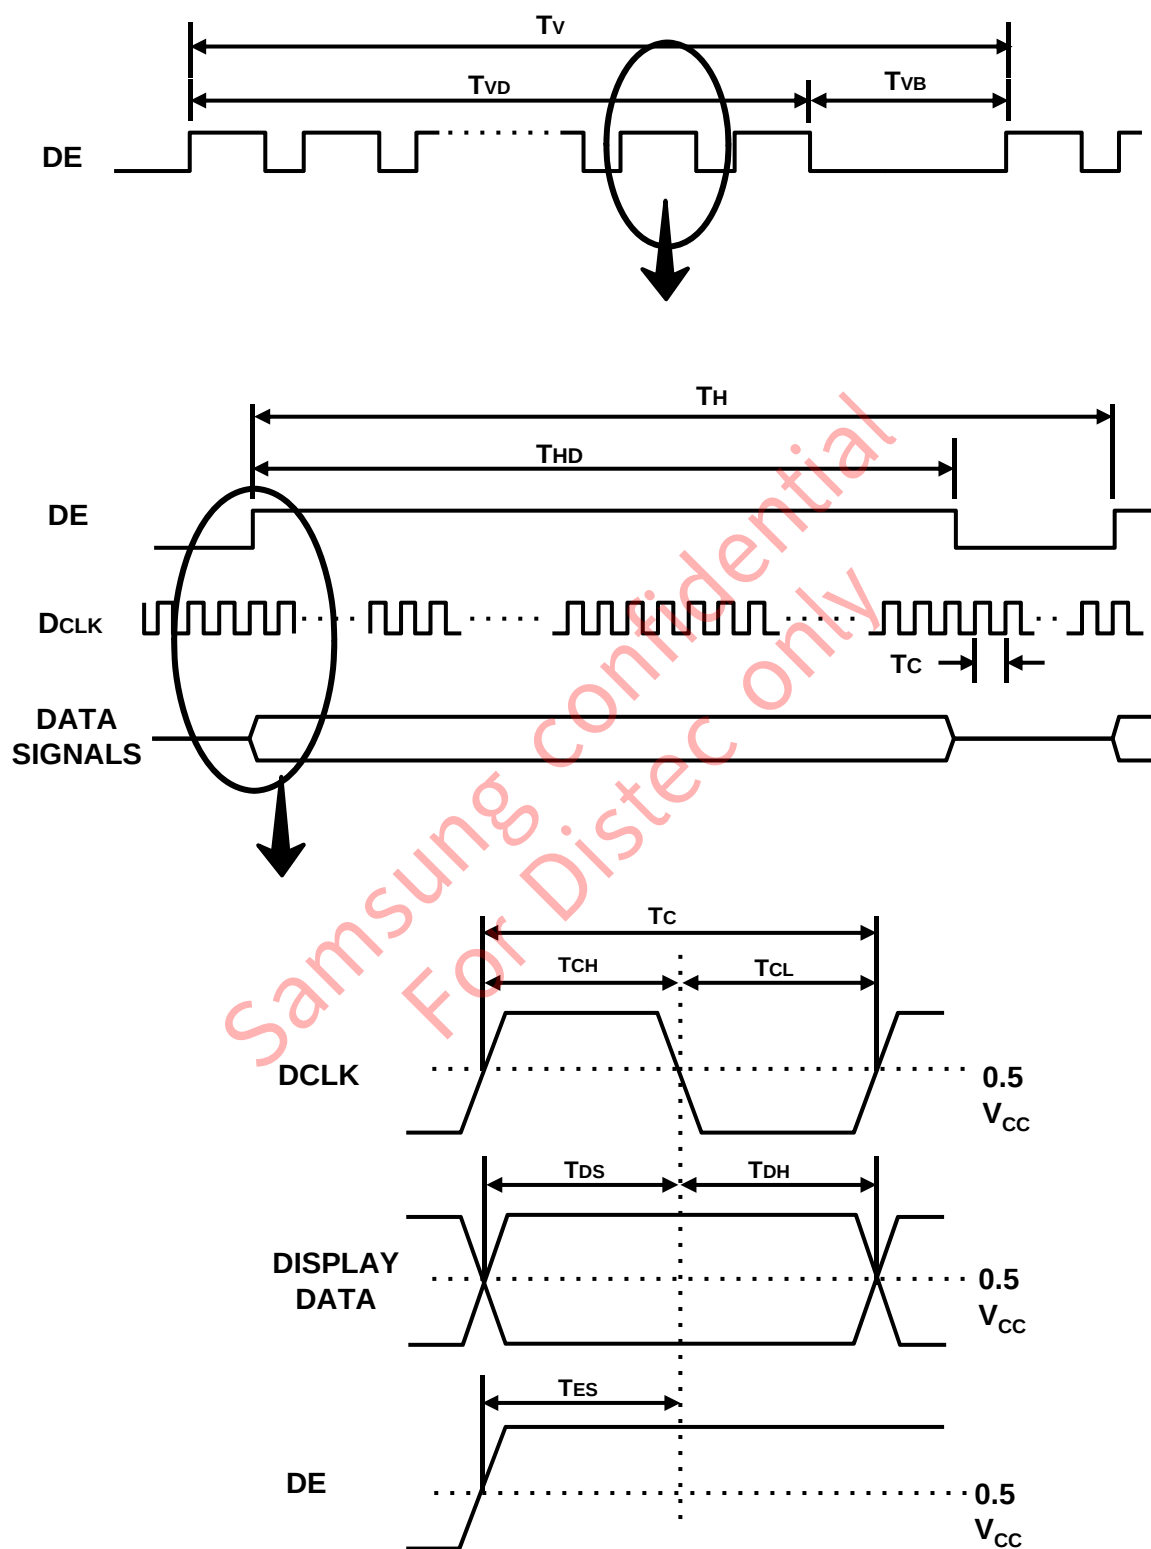

6.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

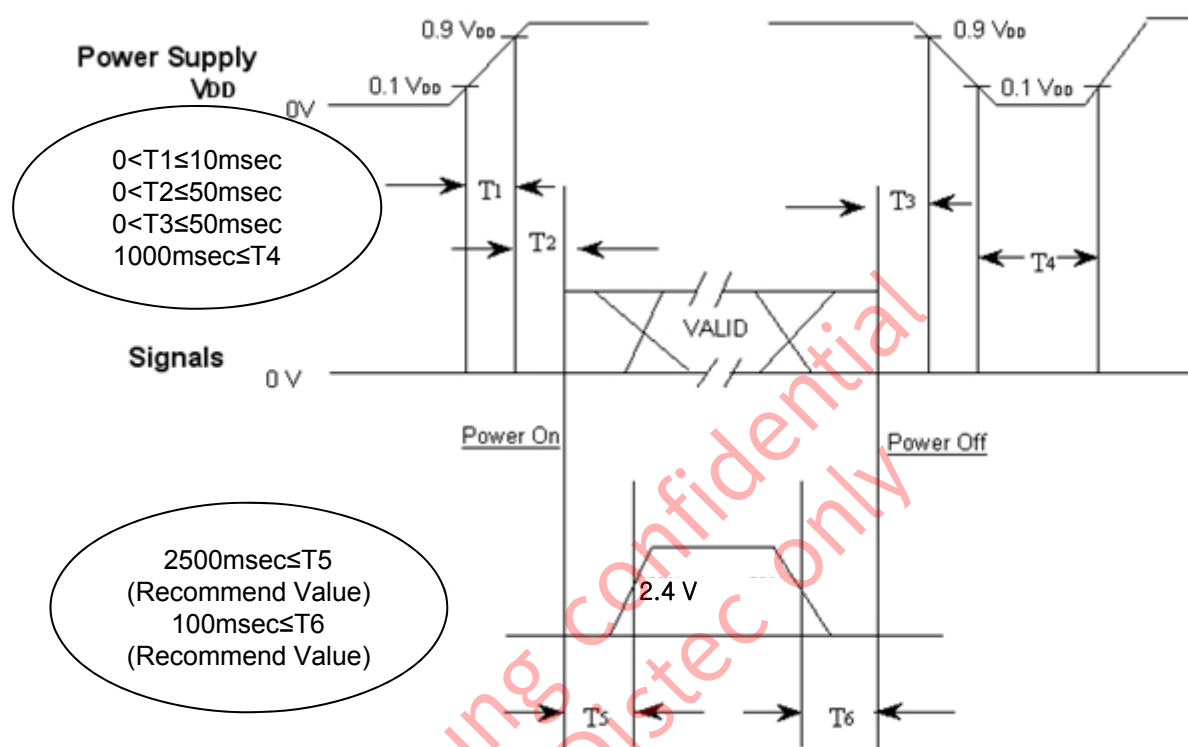


- T1 : V_{DD} rising time from 10% to 90%
T2 : The time from V_{DD} to valid data at power ON.
T3 : The time from valid data off to V_{DD} off at power Off.
T4 : V_{DD} off time for Windows restart
T5 : The time from valid data to B/L enable at power ON.
T6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD}.
- Apply the lamp voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.


7. Outline Dimension (Front View)

Samsung Confidential

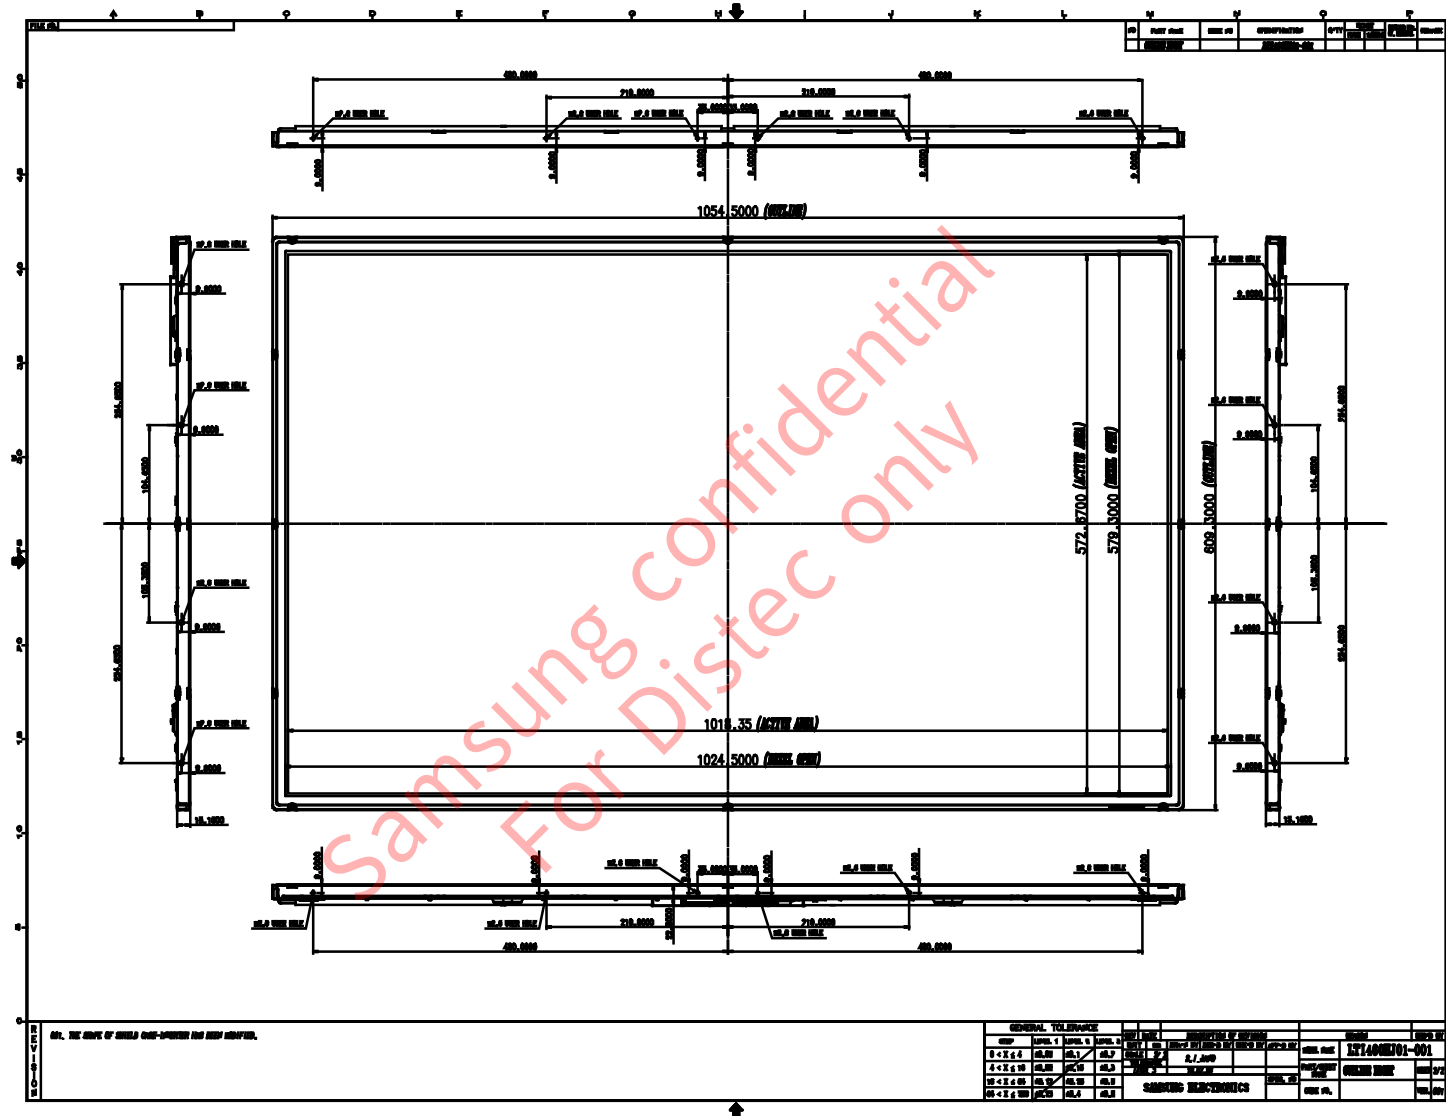

7. Outline Dimension (Rear View)

Samsung Confidential

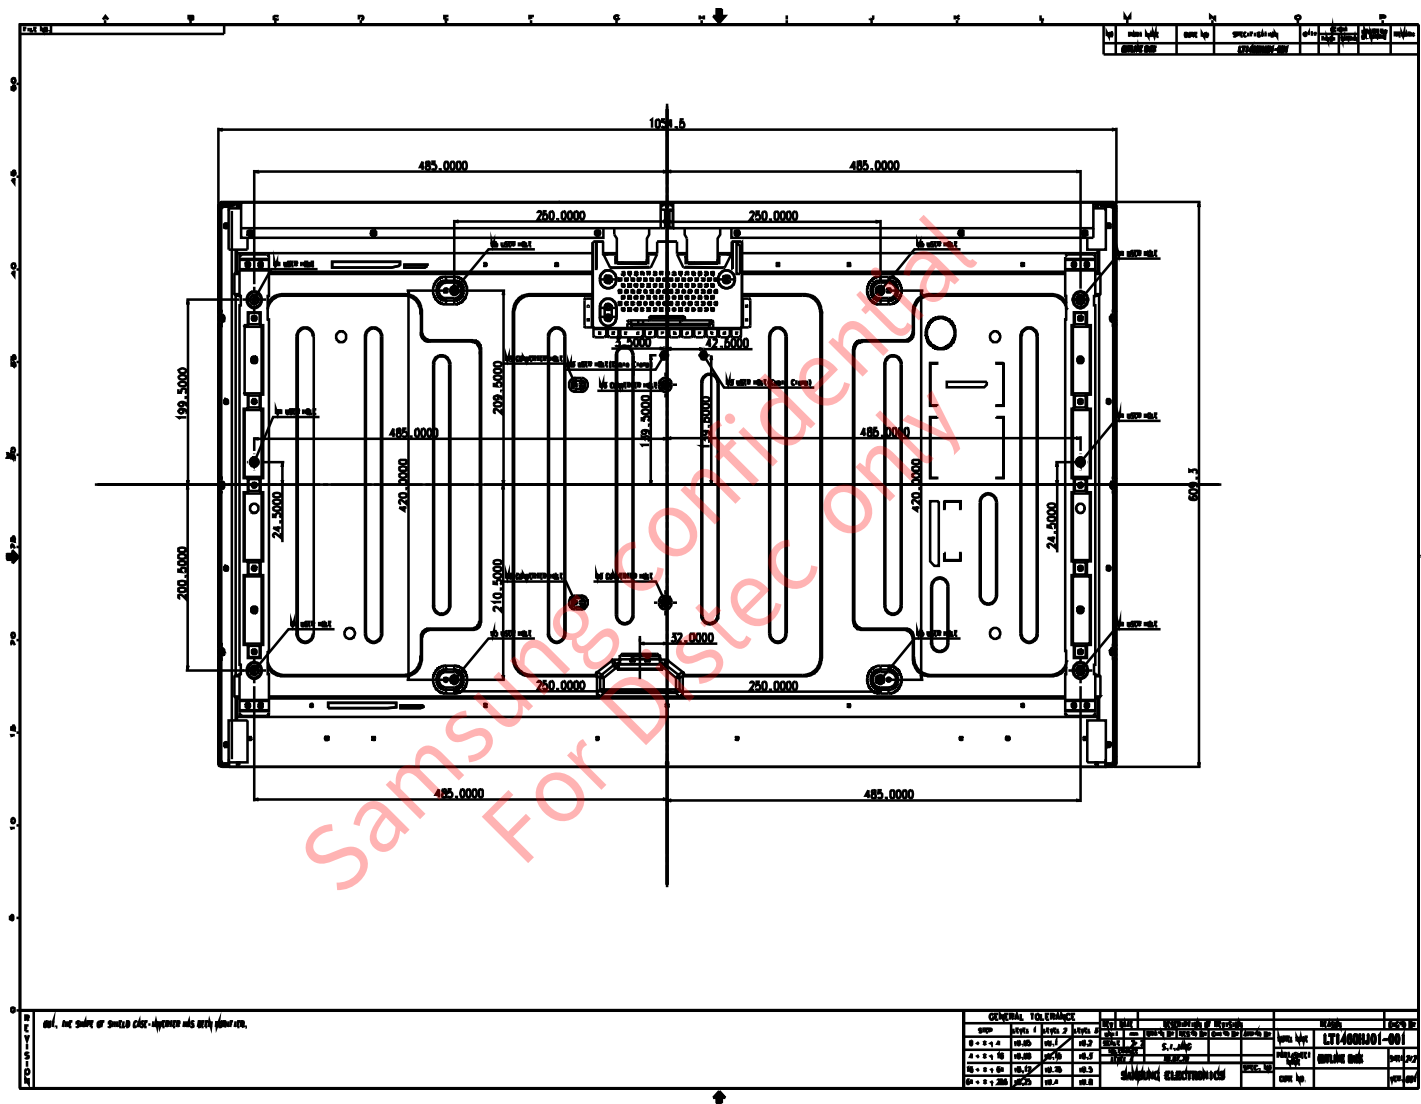


8. PACKING

8.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

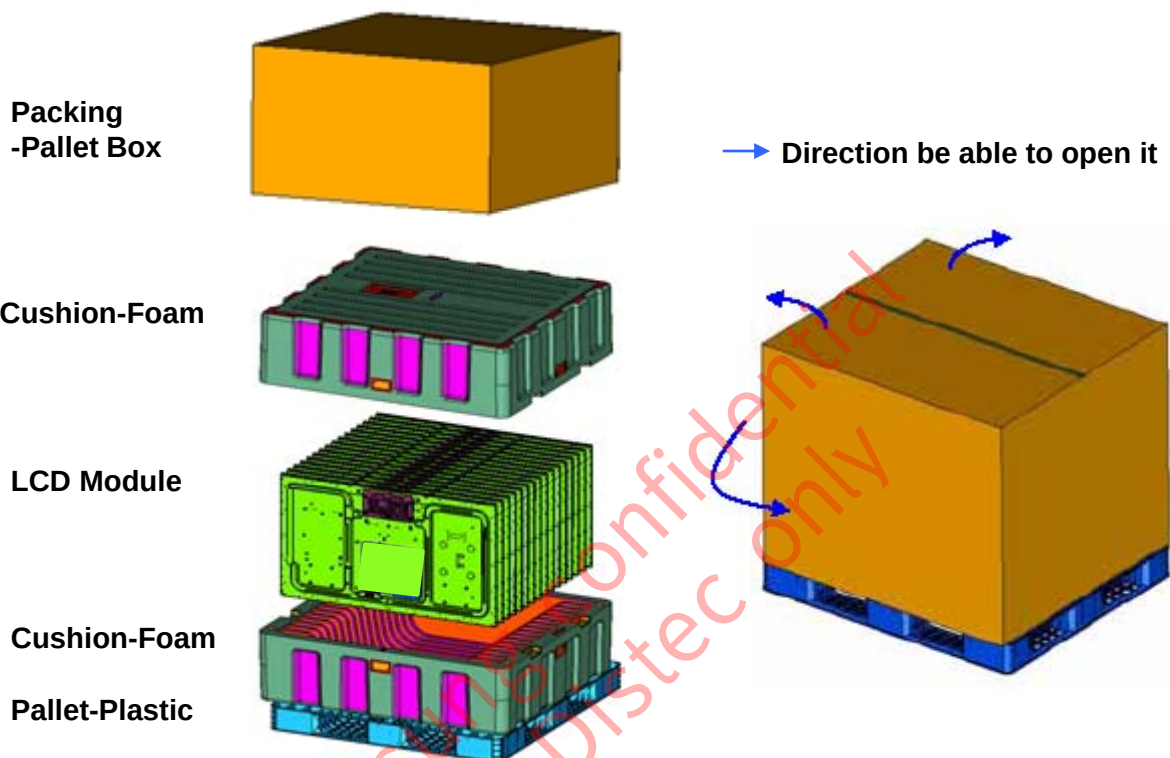


8.2 Packing Specification

Item	Specification	Remark
LCD Packing	13ea / (Packing-Pallet Box)	1. 143 Kg / LCD (13ea) 2. 12 Kg / Cushion-pallet (2ea) 3. 8 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 8.8kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1270mm(H) x 1150mm(V) x 844mm(height)
Total Pallet Weight	171.8 kg	Pallet(8.8kg) + Module(143kg) + Cushion(12kg) + Pallet-BOX(8kg)


9. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


- (1) Part number : LTI460HJ01
- (2) Revision: Three letters
- (3) Lot number : X X X X XXX XX X

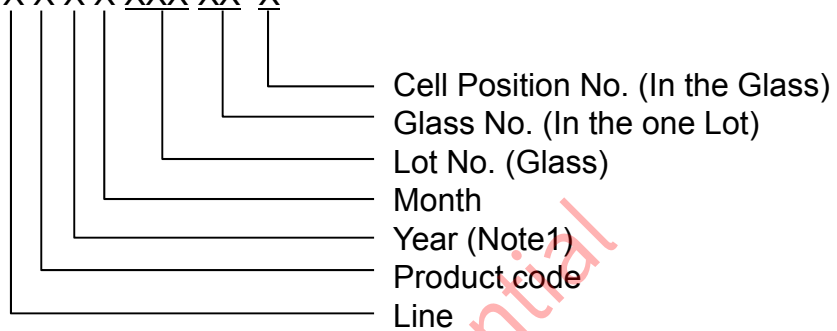

(4) Nameplate Indication

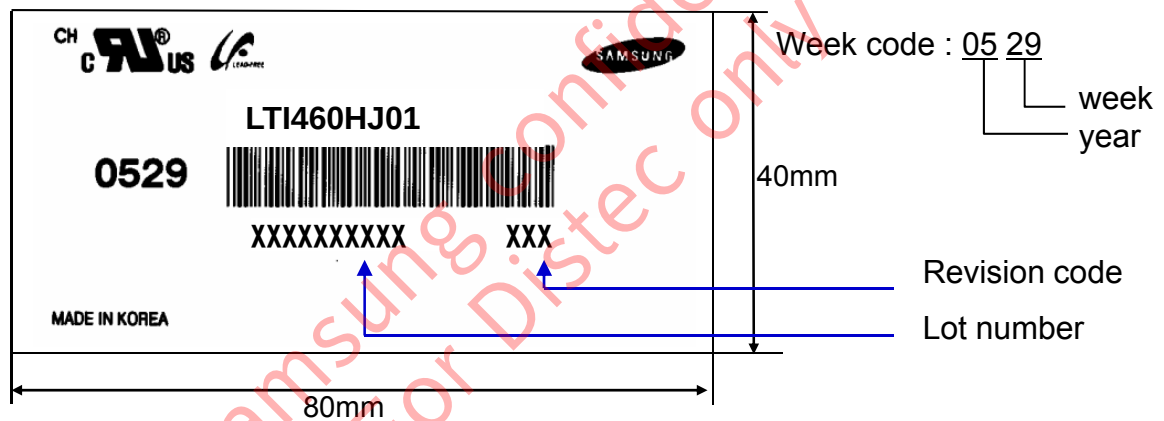

(5) Packing box attach

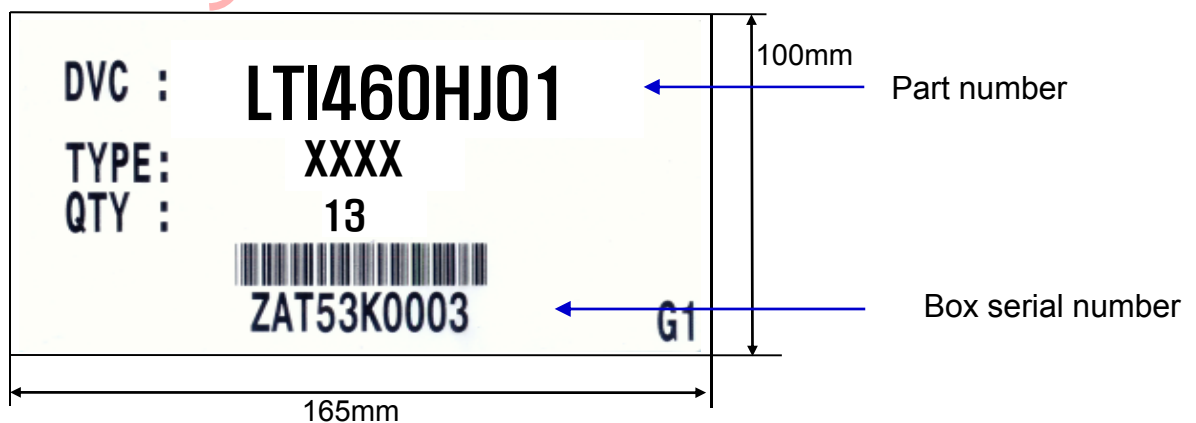

(6) Others

- 1. After service part

Lamps cannot be replaced because of the narrow bezel structure.

MODEL	LTI460HJ01	Doc. No	05-000-G-100920	Page	27 / 30
-------	------------	---------	-----------------	------	---------

10. General Precautions

Samsung Confidential

10.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.
In addition to damage, this may cause improper operation or damage to the Module.
- (d) Note that polarizers are very fragile and could be damage easily.
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the Module from static, or the CMOS Gate Array IC would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not adjust the variable resistor located on the Module.
- (m) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector should not be touched directly with bare hands.

10.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

10.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the backlight connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the backlight and the power supply may cause lower luminance of lamp and may require higher startup voltage(Vs).

10.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
 - Temperature : $20 \pm 15^{\circ}\text{C}$
 - Humidity : $55 \pm 20\%$
 - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LT1460HJ01	Doc. No	05-000-G-100920	Page	29 / 30
-------	------------	---------	-----------------	------	---------

10.5 Others

Samsung Confidential

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Module should be turned clockwise (regular front view perspective) when used in portrait mode
- (c) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (d) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.
- (e) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.
- (f) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (g) Please contact SEC in advance when you display the same pattern for a long time.

Samsung Confidential
For Distec only

MODEL	LT1460HJ01	Doc. No	05-000-G-100920	Page	30 / 30
-------	------------	---------	-----------------	------	---------



DATA DISPLAY GROUP

Our company network supports you worldwide with offices in Germany, Turkey, Great Britain and the USA. For more information please contact:



DISTEC GmbH

Distec GmbH

Augsburger Str. 2b

82110 Germering

Germany

Phone: +49 (0)89 / 89 43 63-0

Fax: +49 (0)89 / 89 43 63-131

E-Mail: info@distec.de

Internet: www.distec.de



DATA DISPLAY TEKNOLOJİ

Data Display Teknoloji Elektronik San Ve Diş Tic A.Ş.

Kustepe Leylak Sok.

Nursanlar İş Merkezi

Kat. 6 No: 21

Sisli / İstanbul

Turkey

Phone: +90 (0)212 / 356 04 20

Fax: +90 (0)212 / 356 04 25

E-Mail: info@datadisplay.com.tr

Internet: www.datadisplay.com.tr



DISPLAY TECHNOLOGY

Display Technology Ltd.

A2 Spectrum Business Centre

Anthony's Way, Medway City Estate

Rochester, Kent, ME2 4NP

United Kingdom

Phone: +44 (0)1634 / 29 55 55

Fax: +44 (0)1634 / 29 55 43

E-Mail: info@displaytechnology.co.uk

Internet: www.displaytechnology.co.uk



**Apollo
Display
Technologies**

A Data Display Company

Apollo Display Technologies, Corp.

85 Remington Blvd.

Ronkonkoma, NY 11779

United States of America

Phone: +1 631 / 580-43 60

Fax: +1 631 / 580-43 70

E-Mail: info@apollodisplays.com

Internet: www.apollodisplays.com