



Product Information

DATE : Mar.18,2011

SAMSUNG TFT-LCD**MODEL : LTI550HJ02**

The Information Described in this Specification is Preliminary and can be changed without prior notice

APPROVED BY Kwang-Soo Lee	DATE Mar.18,2011	PREPARED BY Young-Do Choi	DATE Mar.18,2011
-------------------------------------	---------------------	-------------------------------------	---------------------

Application Engineering Part , LCD Division

Samsung Electronics Co . , LTD.

Contents**Samsung Confidential**

Revision History	(3)
General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Application information for DID (Digital Information Display)	(7)
3. Optical Characteristics	(8)
4. Electrical Characteristics	(11)
4.1 TFT LCD Module	
4.2 Back Light Unit	
4.3 LED Lips Condition & Specification	
4.4 Block Diagram	
5. Input Terminal Pin Assignment	(15)
5.1 LVDS Connector	
5.2 LED Input and Output Pin Configuration	
5.3 LED drive DC-DC converter Power sequence	
5.4 LVDS Interface	
5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color	
6. Interface Timing	(21)
6.1 Timing Parameters (DE mode)	
6.2 Timing Diagrams of interface Signal (DE mode)	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	(24)
8. Packing	(26)
9. Marking & Others	(28)
10. General Precaution	(29)
10.1 Handling	
10.2 Storage	
10.3 Operation	
10.4 Operation Condition Guide	
10.5 Others	

**Samsung Confidential***** Revision History**

Date	Rev. No	Page	Summary
Aug 19, 2010	000	all	First issued
Dec 09, 2010	000	5	LED Junction Temp : 78 → 110℃ Forward voltage : Vf : 122.1→111.2, Vf _p : 133 → 125.7
		8	Optical characteristics Color Chromaticity : TBD → Input value
		11	Rush current Max : 6A→ 7A
		15	Pin assignment correction 23pin
		26	Addition of packing storage condition
Jan 14, 2011	000	5	Forward voltage : Vf : 111.2→133.2, Vf _p : 125.7 → 136.9 (Converter output current :140mA → 145mA for recommendation)

General Description

Samsung Confidential

Description

LTI550HJ02 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a backlight unit. The resolution of a 55.0" is 1920 x 1,080 and this model can display up to 1.07 Billion colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV, Display terminals for AV application products, and Digital Information Display (DID).

Features

- RoHS compliance (Pb-free)
- High contrast ratio, High luminance
- SPVA(Super Patterned Vertical Align) mode
- Wide viewing angle ($\pm 178^\circ$)
- High speed response (120Hz)
- Landscape / Portrait type compatible
- FHD (1920 x 1080 pixels) resolution (16:9)
- Low power consumption
- White LED Backlight (296pcs)
- DE(Data Enable) mode
- 4ch LVDS (Low Voltage Differential Signaling) interface

General Information

Items	Specification	Unit	Note
Module Size	1245.7(H _{TYP}) x 717.5(V _{TYP})	mm	$\pm 1.0\text{mm}$
	10.8 (Min), 31.65 (with converter)		
Weight	16,000	g	Max
Pixel Pitch	0.63(H) x 0.63(V)	mm	
Active Display Area	1209.6(H) x 680.4(V)	mm	
Surface Treatment	Haze 44% , Hard-coating (3H)		
Display Colors	10 bit - 1.07Billion	colors	
Number of Pixels	1920 x 1080	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	600 (Typ.)	cd/m ²	

Samsung Confidential

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

1.1 Environmental absolute Maximum Ratings

Item		Symbol		Min.	Max.	Unit	Note
Power Supply Voltage		V _{DD}		GND-0.5	13.2	V	(1)
Storage temperature		T _{STG}		-20	65	℃	(2)
Glass surface temperature (Operation)	Center	T _{CENTER}		0	50	℃	(2),(5)
	T. Uniformity	△T		-	10	℃	
Shock (non-operating)		S _{nop}	X,Y	-	30	G	(3)
Vibration (non-operating)		V _{nop}		-	1.5	G	(4)

1.2 LED Unit absolute Maximum Ratings

Item	Symbol	Max.	Unit	Note
Operating Temperature Range	Top	-30 ~ 85	°C	-
Storage Temperature Range	TSTG	-40 ~ 100	°C	-
Junction Temperature	Tj	110	°C	-
Forward Current	If	230	mA	/ 1string
	Ifp	350	mA	/ 1string (@Duty ratio=1/10,Pulse width=10ms)
Forward Voltage	Vf	133.2	V	/ 1string
	Vfp	136.9	V	/ 1string (@Duty ratio=1/10,Pulse width=10ms)
Thermal Resistance, Junction to PCB	Rth,JS	23	K/W	-

Samsung Confidential

Note (1) $T_a = 25 \pm 2^\circ\text{C}$

(2) Temperature and relative humidity range are shown in the figure below.

a. 90 % RH Max. ($T_a \leq 39^\circ\text{C}$)

b. Relative Humidity is 90% or less. ($T_a > 39^\circ\text{C}$)

c. No condensation

(3) 11ms, sine wave, one time for $\pm X$, $\pm Y$, $\pm Z$ axis

(4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis


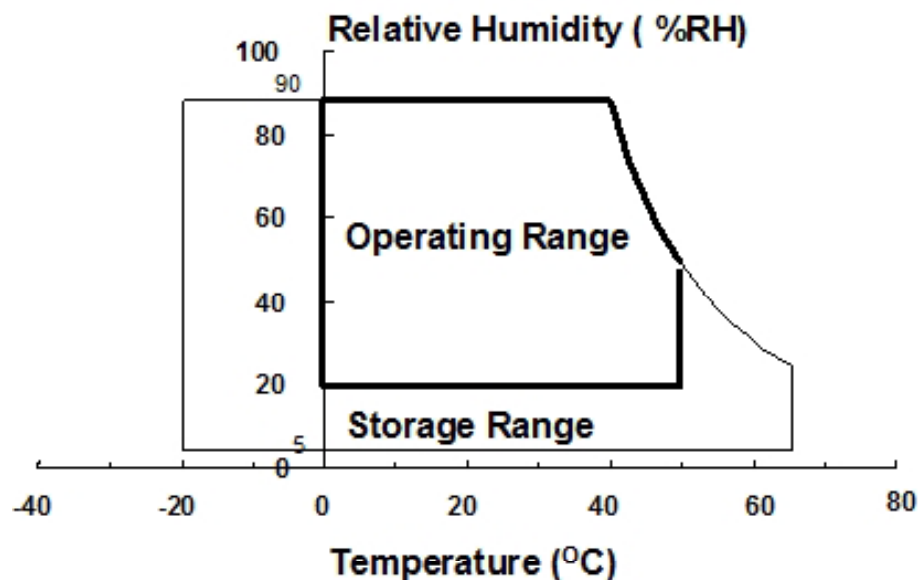


Fig. Temperature and Relative Humidity range

(5) Definition of test point

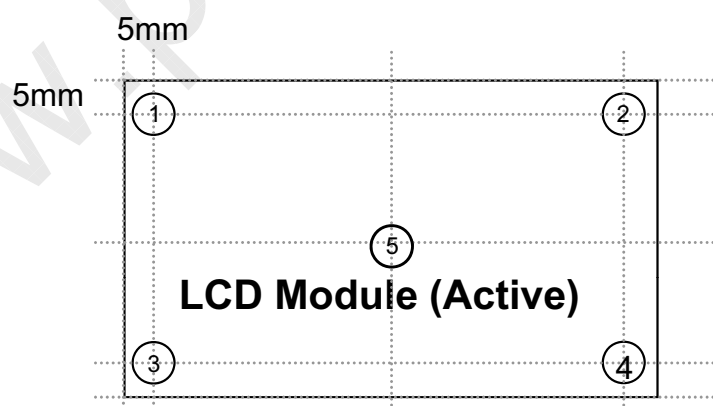

ΔT should be less than 10°C ($\Delta T = |T_{\text{CENTER}} - T_{\text{CORNER}}|$)

T_{CENTER} : Temperature of the center of the glass surface (Test point 5)

T_{CORNER} : Temperature of each edge of the glass surface (Test point 1~4)

2. Application information for DID (Digital Information Display)

A long-term display like DID application may cause uneven display including image retention. To optimize module's lifetime and function, several operating usages are required.

1. Normal operating condition

- Temperature: $20 \pm 15^{\circ}\text{C}$
- Humidity: $55 \pm 20\%$
- Display pattern: moving picture or regular switchover display

Note) Long-term static information image may cause uneven display.

2. Operating usages under abnormal operating condition. Note (1)

a. Ambient condition

- Well-ventilated place is recommended to set up DID system.

b. Power off and screen saver

- Periodical power-off or screen saver is needed after long-term static display. Note (2)

3. Operating usages to protect uneven display due to long-term static information display

a. Suitable operating time for P-DID : under 20 hours a day.

b. Periodical display contents change from static image to moving picture.

- Liquid crystal refresh time is required.

c. Periodical background color and character (image) color change

- Use different colors for background and character (image), respectively.
- Change colors periodically.

d. Avoid combination of background and character with large different luminance.

Note (1) Abnormal condition means every operating condition except normal operating condition.

Note (2) Moving picture or black pattern is strongly recommended for screen saver.

4. Lifetime in this spec is guaranteed only when DID is used under right operating usages.

Samsung Confidential

3. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON BM-7, SPECTRORADIOMETER SR-3

(Ta = 25 ± 2°C, V_{DD} = 12V, f_V = 120Hz, f_{DCLK} = 297 MHz)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R	Normal $\theta_{L,R}=0$ $\theta_{U,D}=0$ Viewing Angle	3000	4000	-		(3) SR-3
Response Time	G-to-G	Tg		-	10	15	msec	(5) BM-7
Luminance of White (Center of screen)		Y _L		500	600	-	cd/m ²	(6) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.620	TYP. +0.03		(7),(8) SR-3
		Ry			0.330			
	Green	Gx			0.303			
		Gy			0.630			
	Blue	Bx			0.150			
		By			0.050			
	White	Wx			0.280			
		Wy	0.290					
Color Gamut		-	-	72	-	%	(7) SR-3	
Color Temperature		-	-	10000	-	K	(7) SR-3	
Viewing Angle	Hor.	θ_L	C/R≥10	75	89	-	Degree	(8) SR-3
		θ_R		75	89	-		
	Ver.	θ_U		75	89	-		
		θ_D		75	89	-		
Brightness Uniformity (9 Points)		B _{uni}		-	-	25	%	(4) SR-3


Note (1) Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the backlight at the given temperature for stabilization of the backlight. This should be measured in the center of screen.


LED current : 145 mA (for 1 string)

Environment condition : Ta = 25 ± 2 °C

Photo detector	Field
SR-3	1°
BM-7	2°

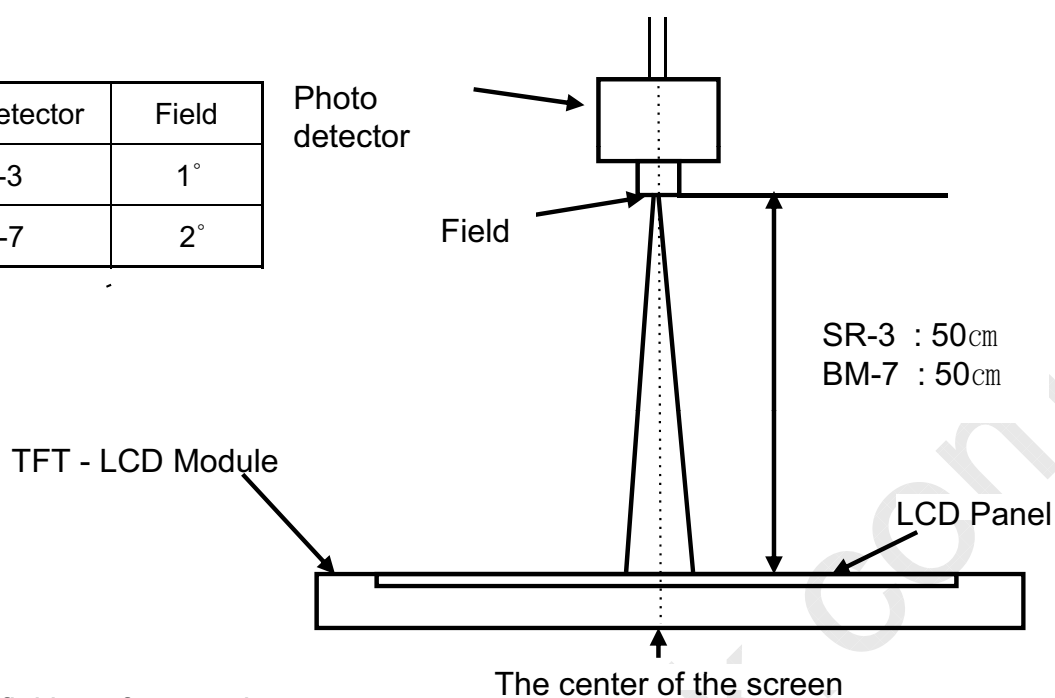

Note (2) Definition of test point

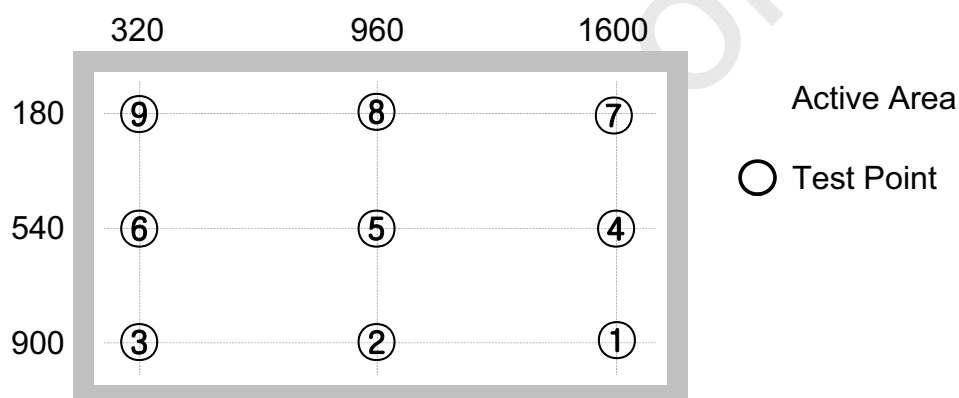

Note (3) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G_{\max}}{G_{\min}}$$

Gmax : Luminance with all pixels white

Gmin : Luminance with all pixels black

Note (4) Definition of 9 points brightness uniformity


$$B_{uni} = 100 * \frac{(B_{\max} - B_{\min})}{B_{\max}}$$

Bmax : Maximum brightness

Bmin : Minimum brightness

Samsung Confidential

Note (5) Definition of Response time :

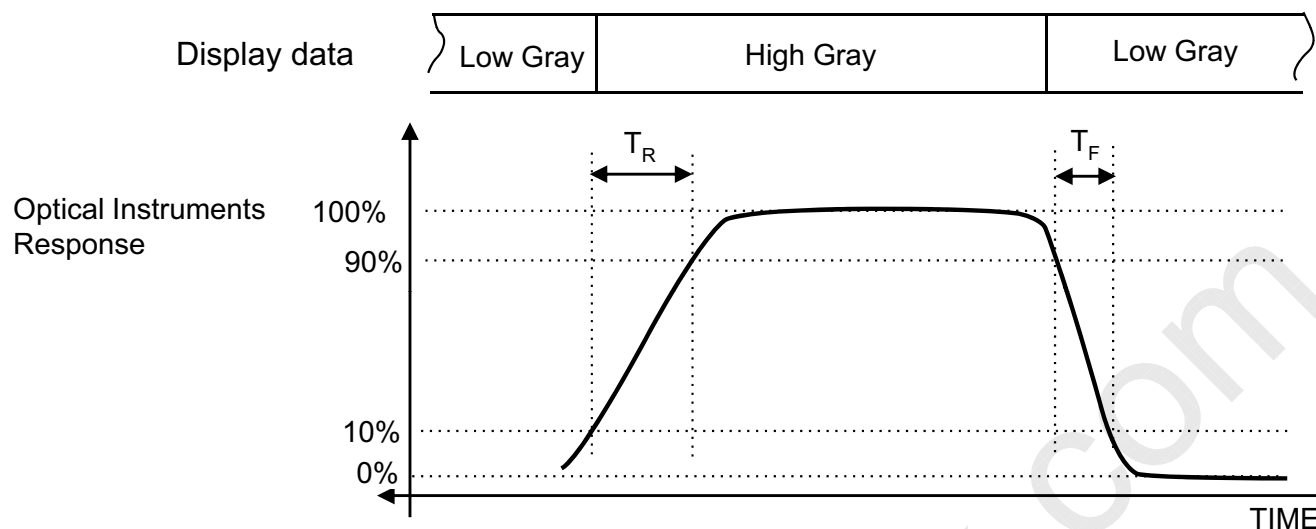 $T^*(X-Y)$: Response time from level of gray(X) to level of gray(Y)**Response time Definition** = $\sum [T^*(X-Y)] / 72$ 

Gray to Gray Response Time											
	Gray	End									
		0	31	63	95	127	159	191	223	255	
Start	0		Tr(0-31)	Tr(0-63)	Tr(0-95)	Tr(0-127)	Tr(0-159)	Tr(0-191)	Tr(0-223)	Tr(0-255)	Ton
	31	Tf(31-0)		Tr(31-63)	Tr(31-95)	Tr(31-127)	Tr(31-159)	Tr(31-191)	Tr(31-223)	Tr(31-255)	
	63	Tf(63-0)	Tf(63-31)		Tr(63-95)	Tr(63-127)	Tr(63-159)	Tr(63-191)	Tr(63-223)	Tr(63-255)	
	95	Tf(95-0)	Tf(95-31)	Tf(95-63)		Tr(95-127)	Tr(95-159)	Tr(95-191)	Tr(95-223)	Tr(95-255)	
	127	Tf(127-0)	Tf(127-31)	Tf(127-63)	Tf(127-95)		Tr(127-159)	Tr(127-191)	Tr(127-223)	Tr(127-255)	
	159	Tf(159-0)	Tf(159-31)	Tf(159-63)	Tf(159-95)	Tf(159-127)		Tr(159-191)	Tr(159-223)	Tr(159-255)	
	191	Tf(191-0)	Tf(191-31)	Tf(191-63)	Tf(191-95)	Tf(191-127)	Tf(191-159)		Tr(191-223)	Tr(191-255)	
	223	Tf(223-0)	Tf(223-31)	Tf(223-63)	Tf(223-95)	Tf(223-127)	Tf(223-159)	Tf(223-191)		Tr(223-255)	
	255	Tf(255-0)	Tf(255-31)	Tf(255-63)	Tf(255-95)	Tf(255-127)	Tf(255-159)	Tf(255-191)	Tf(255-223)		
		Toff									


Note (6) Definition of Luminance of White : Luminance of white at center point ⑤

Note (7) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point ⑤

Note (8) Definition of Viewing Angle

: Viewing angle range (C/R ≥ 10)

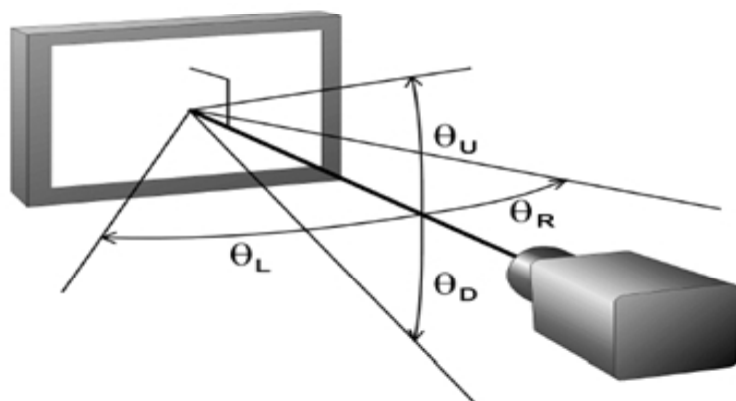

Samsung Confidential

4. Electrical Characteristics

4.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^{\circ}\text{C} \pm 2^{\circ}\text{C}$

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I_{DD}	-	512	-	mA	(2),(3)
	(b) White		-	531	-	mA	
	(c) N-Pattern		-	995	1413	mA	
Vsync Frequency		f_V	-	120	-	Hz	
Hsync Frequency		f_H	120	135	140	kHz	
Main Frequency		f_{DCLK}	260	297	305	MHz	
Rush Current		I_{RUSH}	-	4	7	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD} .




(2) $f_V = 120\text{Hz}$, $f_{DCLK} = 297\text{MHz}$, $V_{DD} = 12.0\text{V}$, DC Current.

(3) Power dissipation check pattern (LCD Module only)


a) Black Pattern

b) White Pattern

c) N-Pattern



(4) Measurement Conditions

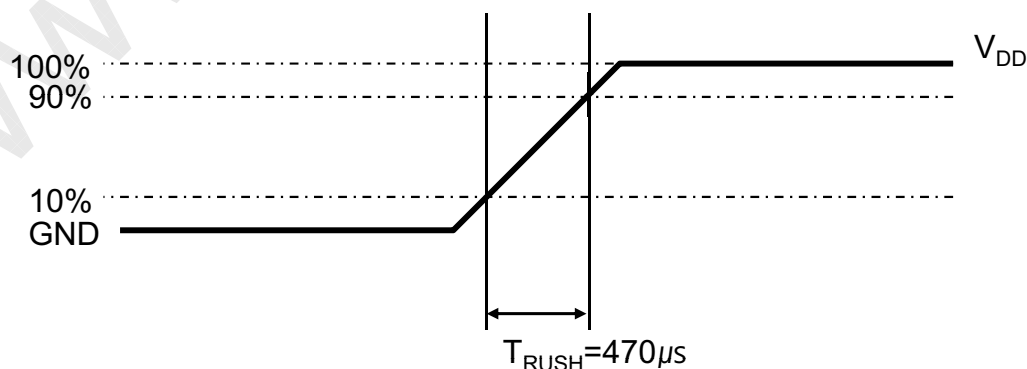

Rush Current I_{RUSH} can be measured when T_{RUSH} is $470\mu\text{s}$.

Samsung Confidential

4.2 Back Light Unit


The backlight unit contains 296 WLEDs (White Light Emitting Diode).

Ta=25 ± 2°C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	50,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : Ta = 25±2°C]

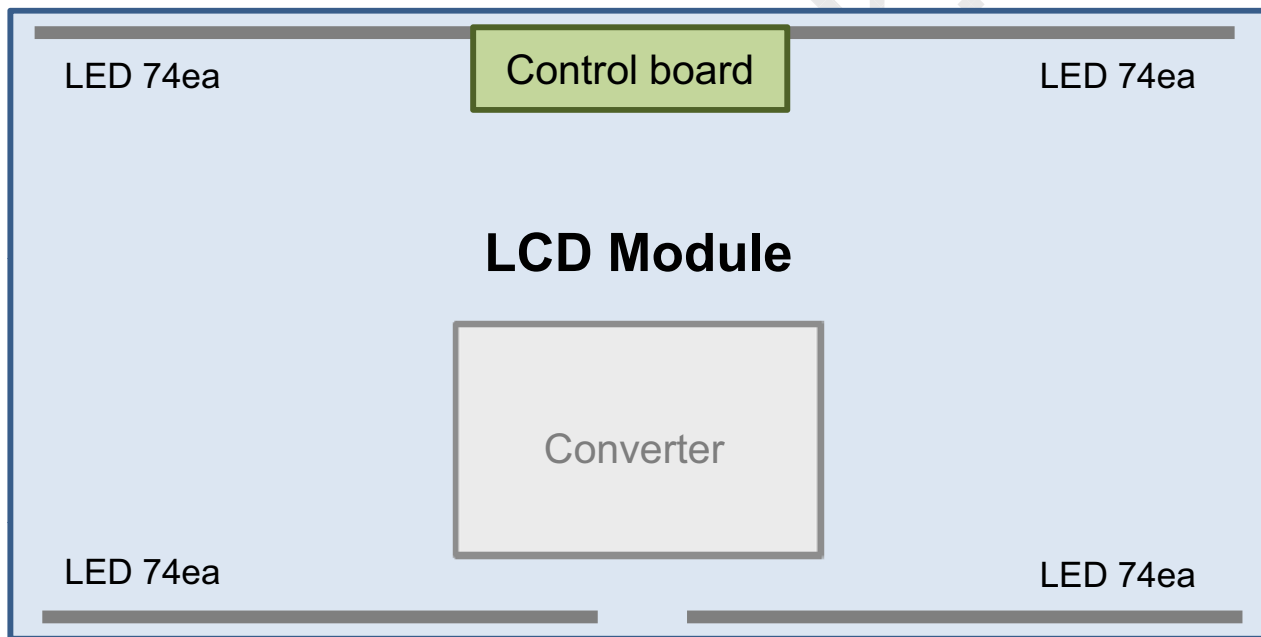

Samsung Confidential

4.3 LED LIPS Condition & Specification

Items	Symbol	Conditions	Specifications			Unit	Note
			Min.	Typ.	Max.		
Input Voltage	V _{in}	-	22	24	26	V	Ta=25±2 °C
Input Current	I _{in}	V _{in} = 24.0V V _{dim} = 3.3V	-	-	9.67	Adc	Initial turn on
Output Current	I _{LED}	V _{in} = 24.0V V _{dim} = 3.3V	140	145	150	mA _{mean}	After 1 hour Warm-up
Backlight On/Off	ON	V _{in} = 24.0V	2.4	-	5.25	V	-
	OFF	V _{in} = 24.0V	0	-	0.8		
Dimming Control	V _{DIM}	Max Lum	0	-	3.3	V	-
Dim freq.	f _{DIM}	V _{in} = 24.0V	140	150	160	Hz	-


Note (1) Power Consumption is measured at 600[cd/m²] of luminance condition which is the typical luminance value. Lamp Current is measured at the point before Lamp.

※ Additional Appendix for supply current

Items	Symbol	Conditions	Specifications			Unit
			Min.	Typ.	Max.	
Input Current	I _{IN_overshoot}	V _{IN} =24V, DIM=3.3V (Within 1hr at LED ON)	-	6.23	6.52	Adc
	I _{IN_saturation}	V _{IN} =24V, DIM=3.3V (After 1hr Aging)	-	6.06	6.34	

Samsung Confidential

4.4 Block Diagram

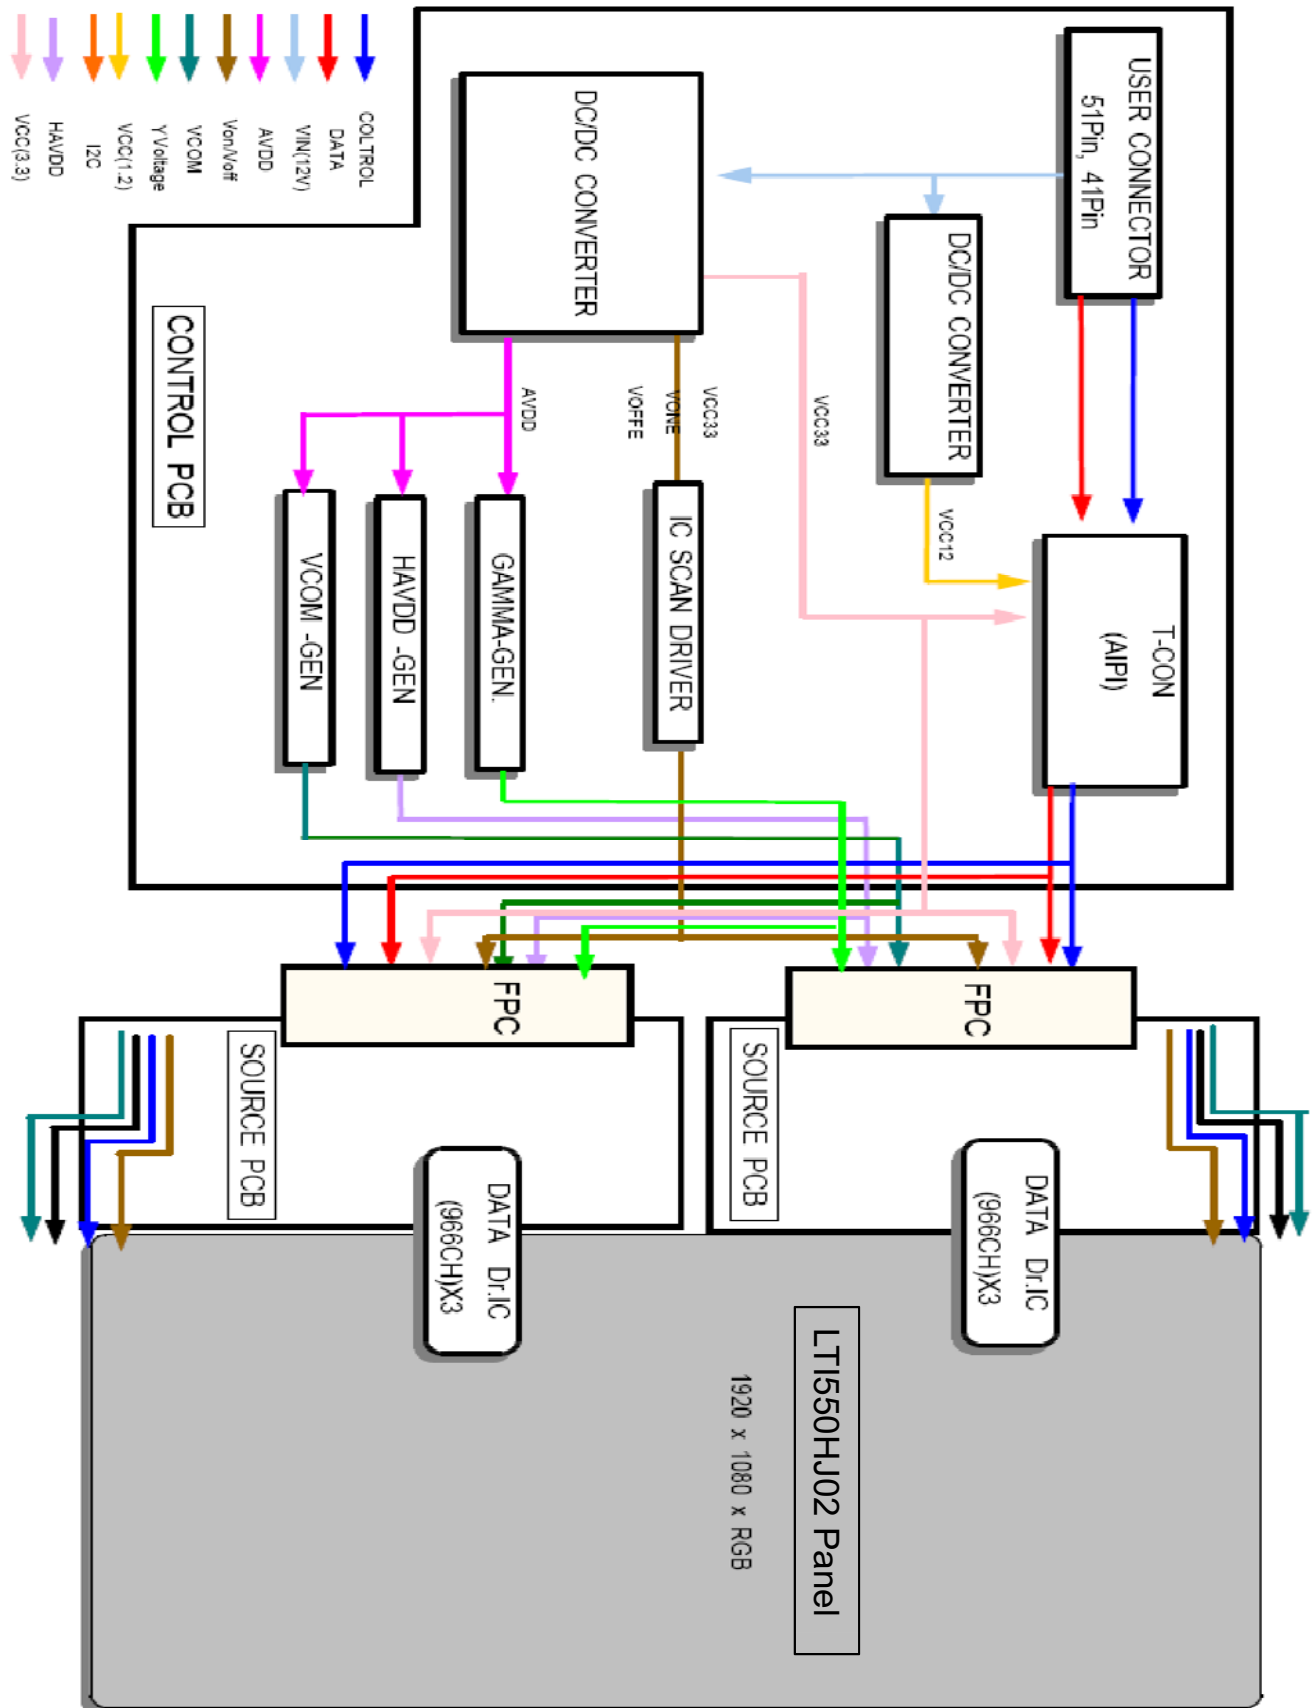

Samsung Confidential

5. Input Terminal Pin Assignment

5.1 Input Signal & Power

Connector : CN1 FI-RE41S-HF (JAE)

PIN No.	Description		PIN No.	Description	
1	Vdd (12V)		26	Odd LVDS Signal	Rx3[0]P
2	Vdd (12V)		27		Rx3[1]N
3	Vdd (12V)		28		Rx3[1]P
4	Vdd (12V)		29		Rx3[2]N
5	Vdd (12V)		30		Rx3[2]P
6	No Connection(1)		31		GND
7	GND		32		Rx3CLK-
8	GND		33		Rx3CLK+
9	GND		34		GND
10	Odd LVDS Signal	Rx1[0]N	35		Rx3[3]N
11		Rx1[0]P	36		Rx3[3]P
12		Rx1[1]N	37		Rx3[4]N
13		Rx1[1]P	38		Rx3[4]P
14		Rx1[2]N	39	GND	
15		Rx1[2]P	40	No Connection (1)	
16		GND	41	No Connection(1)	
17		Rx1CLK-			
18		Rx1CLK+			
19		GND			
20		Rx1[3]N			
21		Rx1[3]P			
22		Rx1[4]N			
23		Rx1[4]P			
24	GND				
25	Odd LVDS	Rx3[0]N			

Note (1) No Connection :These pins are only used for SAMSUNG internal purpose.

Samsung Confidential

Connector : CN2 FI-RE51S-HF (JAE)

PIN No.	Description		PIN No.	Description	
1	Vdd (12V)		26	Even LVDS Signal	Rx4[0]P
2	Vdd (12V)		27		Rx4[1]N
3	Vdd (12V)		28		Rx4[1]P
4	Vdd (12V)		29		Rx4[2]N
5	Vdd (12V)		30		Rx4[2]P
6	No Connection(1)		31		GND
7	GND		32		Rx4CLK-
8	GND		33		Rx4CLK+
9	GND		34		GND
10	Even LVDS Signal	Rx2[0]N	35		Rx4[3]N
11		Rx2[0]P	36		Rx4[3]P
12		Rx2[1]N	37		Rx4[4]N
13		Rx2[1]P	38		Rx4[4]P
14		Rx2[2]N	39	GND	
15		Rx2[2]P	40	No Connection (1)	
16		GND	41	No Connection(1)	
17		Rx2CLK-	42	No Connection (1)	
18		Rx2CLK+	43	No Connection(1)	
19		GND	44	No Connection (1)	
20		Rx2[3]N	45	LVDS_SEL (2)	
21		Rx2[3]P	46	DCC On/Off option(3)	
22		Rx2[4]N	47	No Connection(1)	
23		Rx2[4]P	48	No Connection(1)	
24	GND		49	No Connection (1)	
25	Even LVDS	Rx4[0]N	50	No Connection(1)	
			51	No Connection (1)	

Note 1) No Connection : These pins are only used for SAMSUNG internal purpose.

Note 2) LVDS OPTION : IF THIS PIN : HIGH (3.3 V) → NORMAL NS LVDS FORMAT

OTHERWISE : LOW (GND) OR OPEN(NC) → JEIDA LVDS FORMAT

Note 3) DCC Option : IF THIS PIN : HIGH (3.3 V) → DCC off


OTHERWISE : LOW (GND) OR Open(NC) → DCC on

Sequence : On = $V_{DD}(T1) \geq \text{LVDS Option} \geq \text{Interface Signal}(T2)$

OFF = $\text{Interface Signal}(T3) \geq \text{LVDS Option} \geq V_{DD}$

Samsung Confidential

Note (3) LVDS Connector

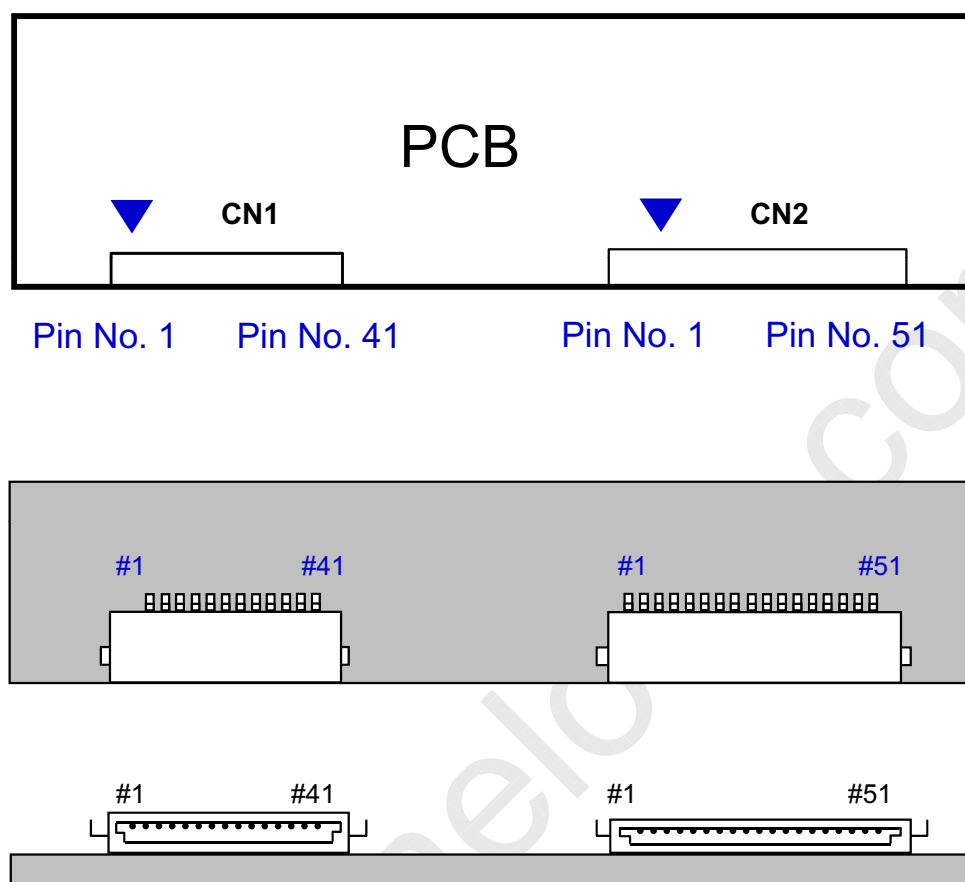**Fig. Connector diagram**


- a. All GND pins should be connected together and also be connected to the LCD's metal chassis.
- b. All power input pins should be connected together.
- c. All N.C pins should be separated from other signal or power.

Samsung Confidential

5.2 LED Converter input & output Pin Configuration

Pin No.	Pin Configuration(FUNCTION)
1	Vin (24V)
2	Vin (24V)
3	Vin (24V)
4	Vin (24V)
5	Vin (24V)
6	GND
7	GND
8	GND
9	GND
10	GND
11	No Connection
12	ENA (Converter on/off Control signal)
13	Dimming Control [0V: Min, 3.3V: Max]
14	No Connection

5.3 LED drive DC-DC converter Power Sequence

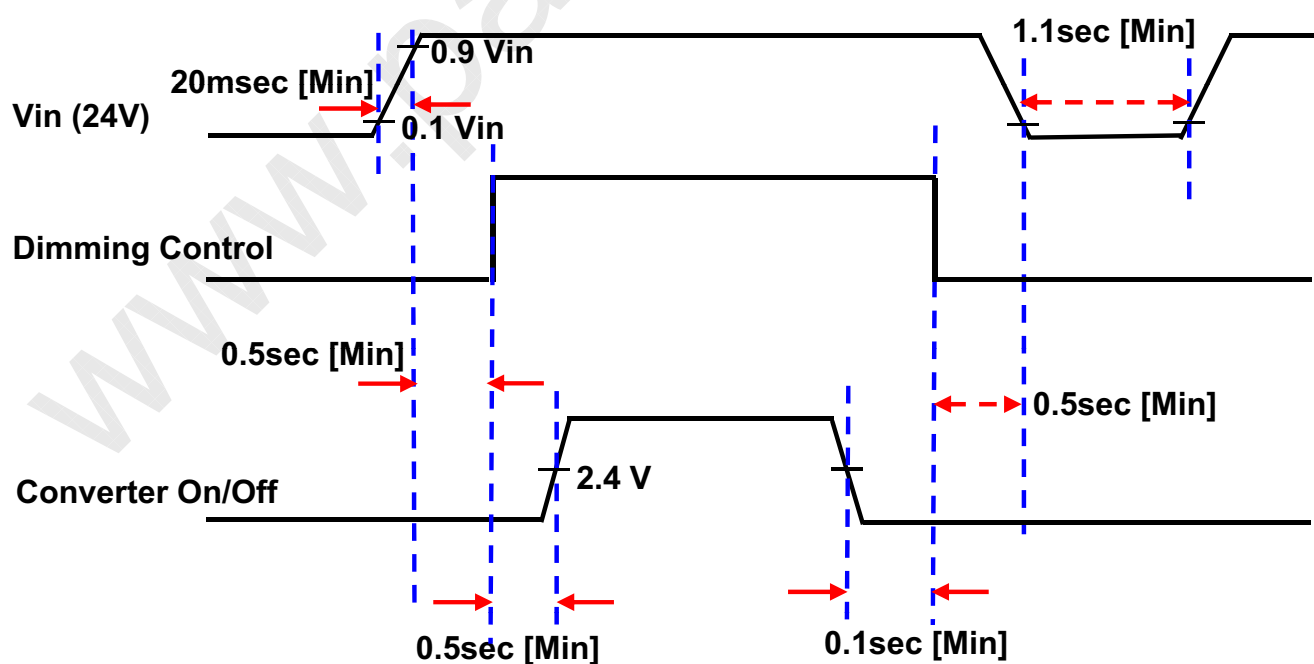

5.4 LVDS Interface

Samsung Confidential

- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA & Normal)

Default LVDS Option : JEIDA

	LVDS pin	JEIDA -DATA	VESA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2	R0
	TxIN/RxOUT1	R3	R1
	TxIN/RxOUT2	R4	R2
	TxIN/RxOUT3	R5	R3
	TxIN/RxOUT4	R6	R4
	TxIN/RxOUT6	R7	R5
	TxIN/RxOUT7	G2	G0
TxOUT/RxIN1	TxIN/RxOUT8	G3	G1
	TxIN/RxOUT9	G4	G2
	TxIN/RxOUT12	G5	G3
	TxIN/RxOUT13	G6	G4
	TxIN/RxOUT14	G7	G5
	TxIN/RxOUT15	B2	B0
	TxIN/RxOUT18	B3	B1
TxOUT/RxIN2	TxIN/RxOUT19	B4	B2
	TxIN/RxOUT20	B5	B3
	TxIN/RxOUT21	B6	B4
	TxIN/RxOUT22	B7	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R0	R6
	TxIN/RxOUT5	R1	R7
	TxIN/RxOUT10	G0	G6
	TxIN/RxOUT11	G1	G7
	TxIN/RxOUT16	B0	B6
	TxIN/RxOUT17	B1	B7
	TxIN/RxOUT23	RESERVED	RESERVED

Samsung Confidential

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																										GRAY SCALE LEVEL
		RED									GREEN								BLUE									
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7			
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-		
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-		
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-		
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-		
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-		
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-		
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-		
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0		
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1		
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2		
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			R3~ R252		
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:					
	↓ LIGHT	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253		
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254		
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255		
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0		
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1		
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2		
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			G3~ G252		
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:					
	↓ LIGHT	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G253		
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G254		
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	G255		
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0		
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B1		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	B2		
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:			B3~ B252		
		:	:	:	:	:	:			:	:	:	:	:	:			:	:	:	:	:	:					
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	B253		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	B254		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B255		

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

Samsung Confidential

6. Interface Timing

6.1 Timing Parameters (DE mode)


Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Clock	Frequency	$1/T_C$	260	297	305	MHz	2Pix/clock
Hsync		F_H	120	135	140	KHz	-
Vsync		F_V	95	120	125	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	Lines	-
	Vertical Total	T_V	1100	1125	1350	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	Clocks	-
	Horizontal Total	T_H	2090	2200	2350	Clocks	-

Note) This product is DE mode. And, the input of Hsync & Vsync signal is necessary on normal operation.

Test Point : TTL control signal and CLK at LVDS Tx input terminal in system

Samsung Confidential


6.2 Timing diagrams of interface signal (DE mode)

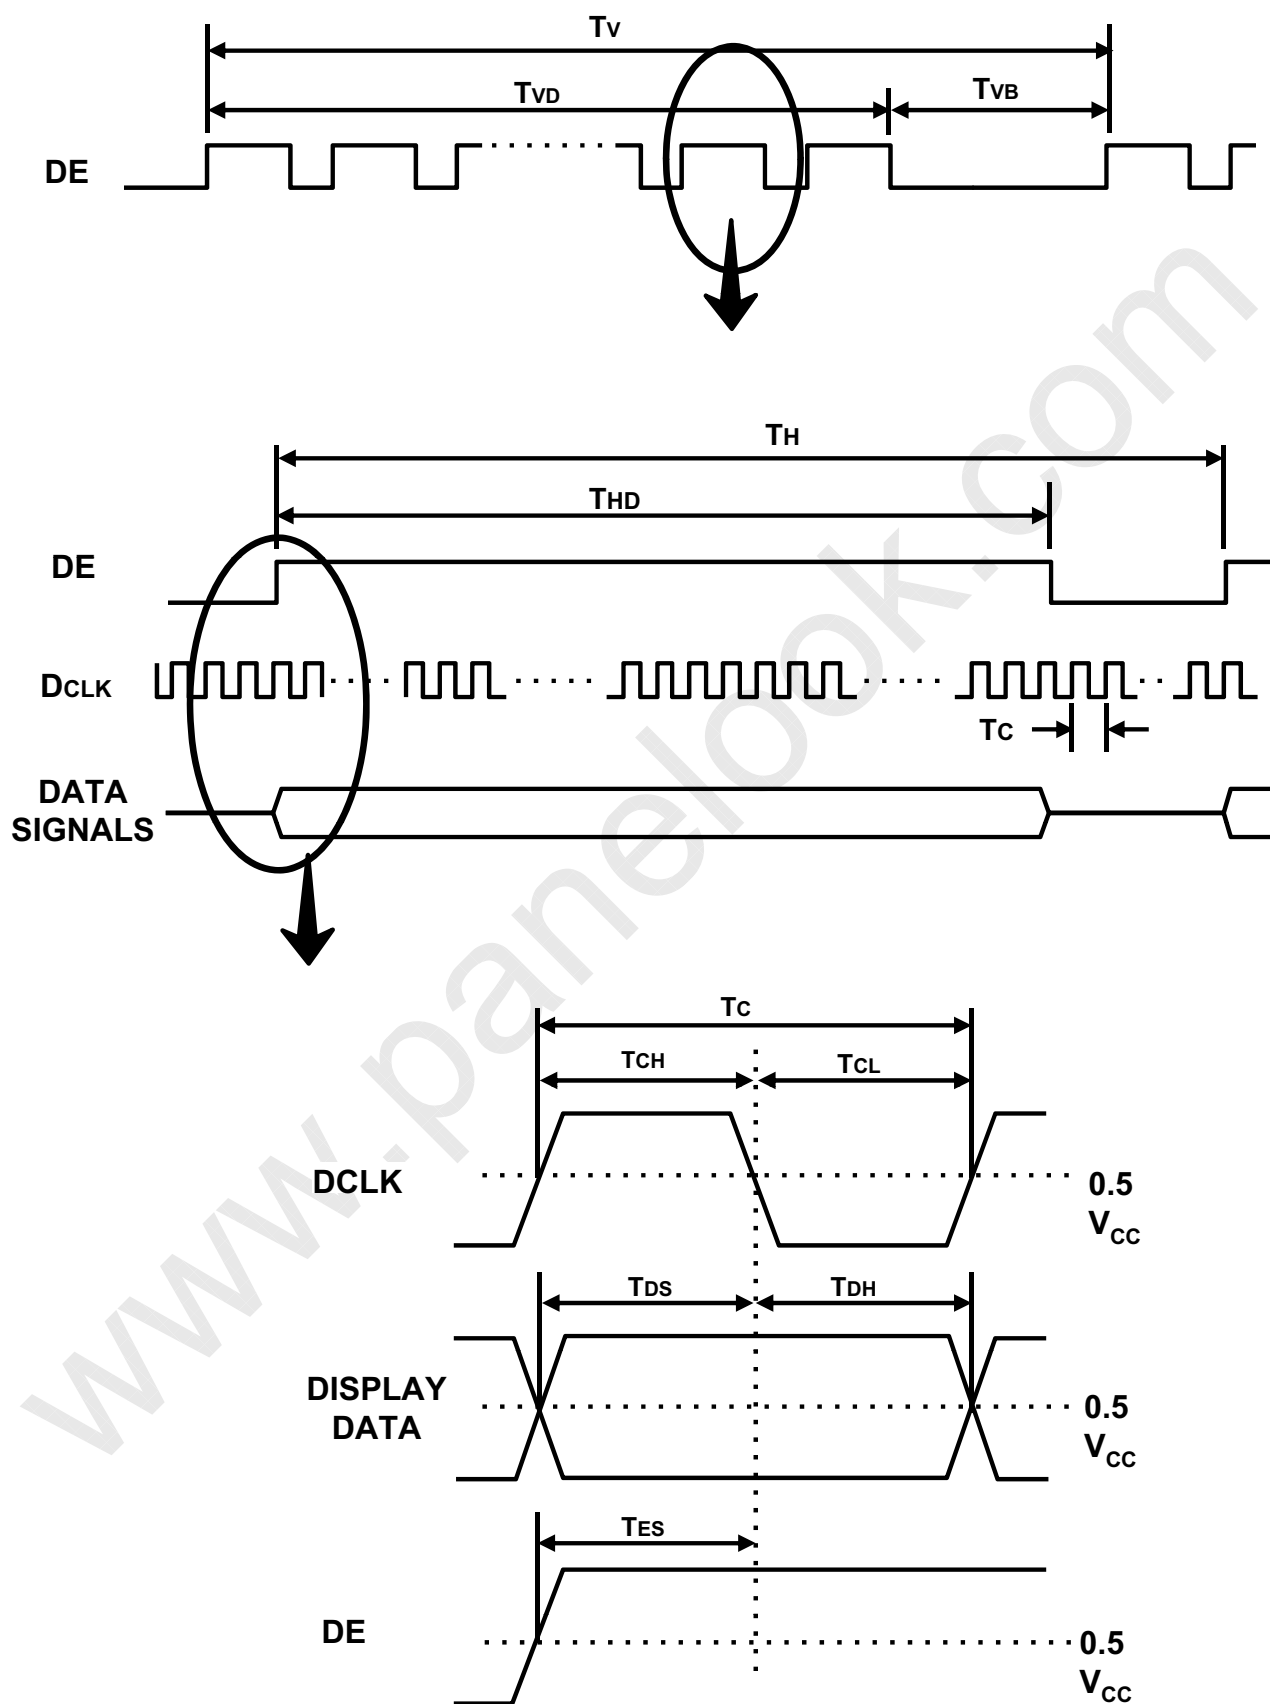

Samsung Confidential

6.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

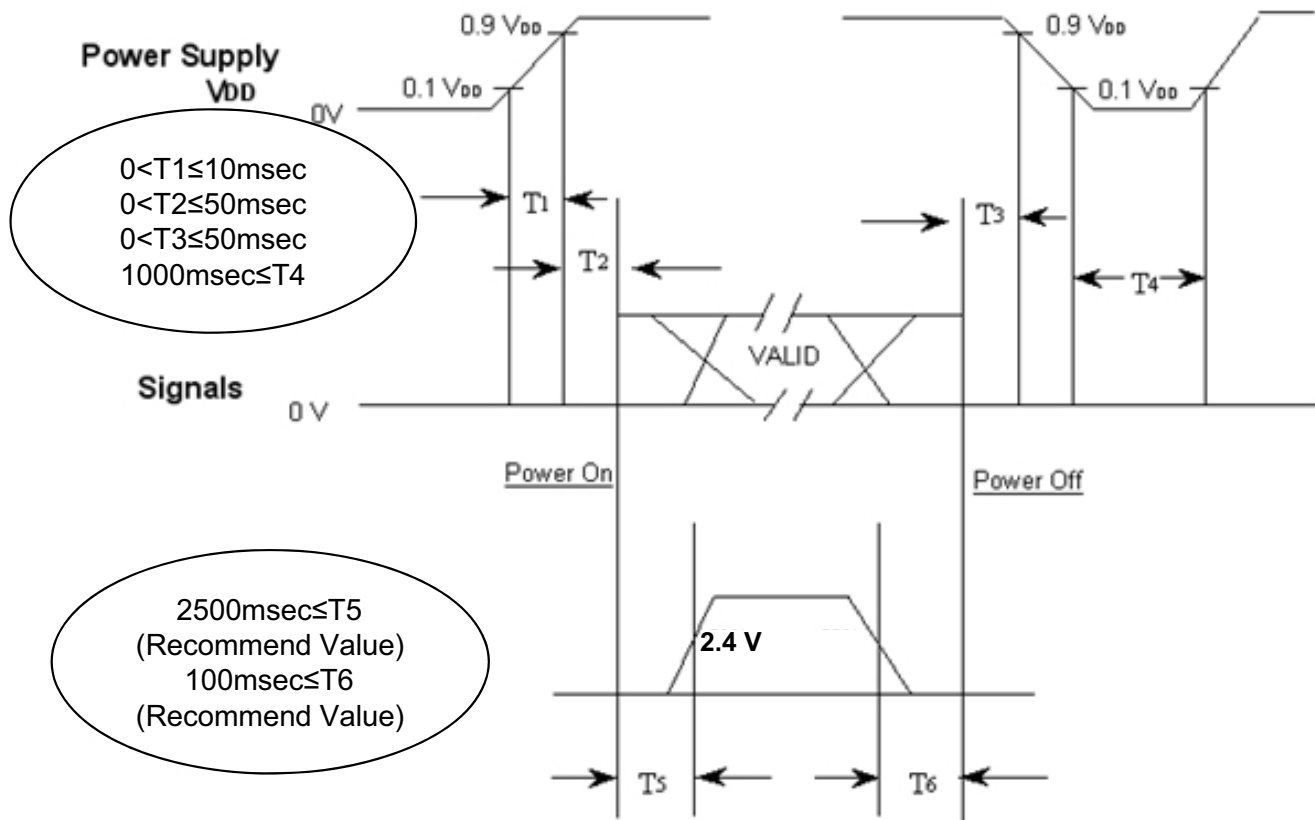

$T1$: V_{DD} rising time from 10% to 90%

$T2$: The time from V_{DD} to valid data at power ON.

$T3$: The time from valid data off to V_{DD} off at power Off.


$T4$: V_{DD} off time for Windows restart


$T5$: The time from valid data to B/L enable at power ON.

$T6$: The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD} .
- Apply the lamp voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- $T4$ should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

7. Outline Dimension (Front View)

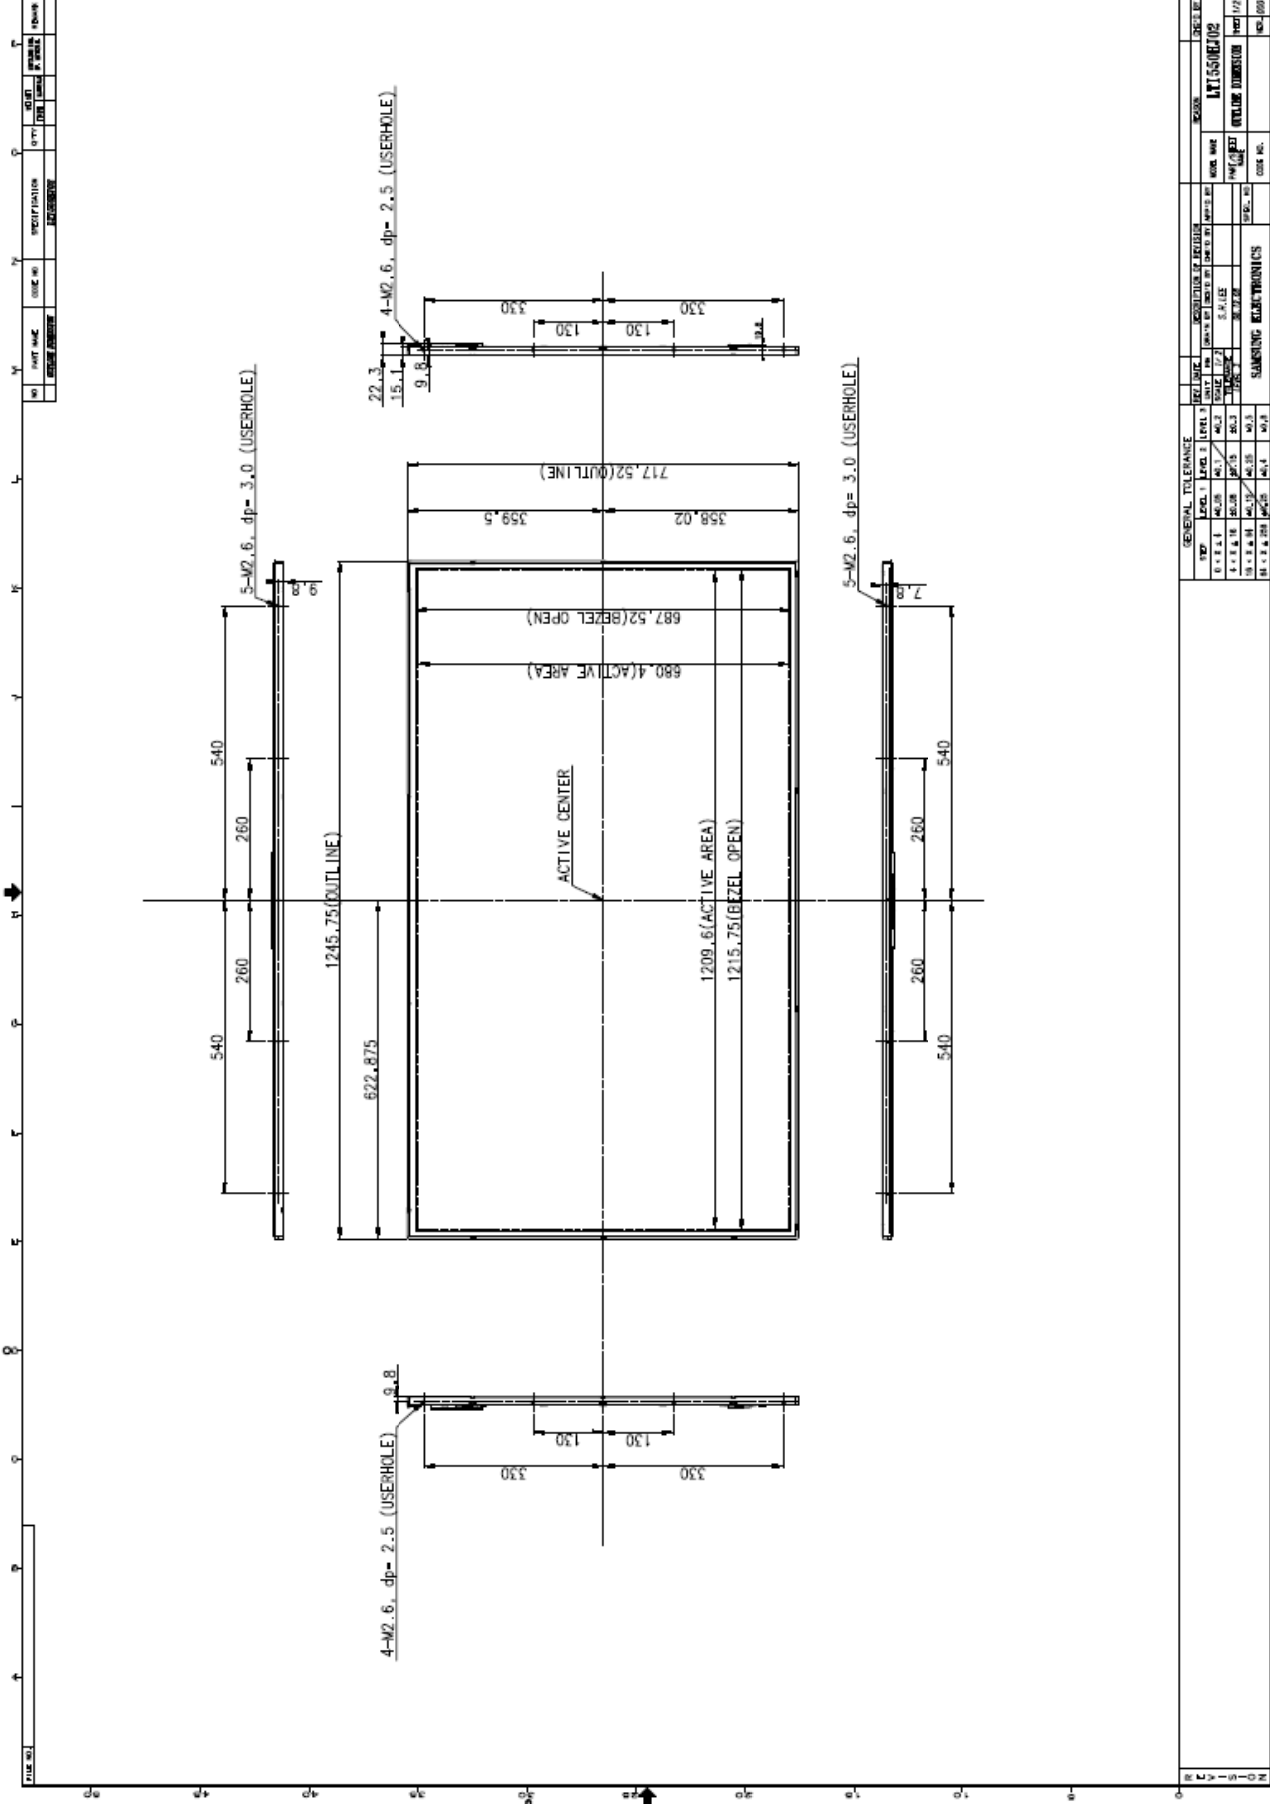

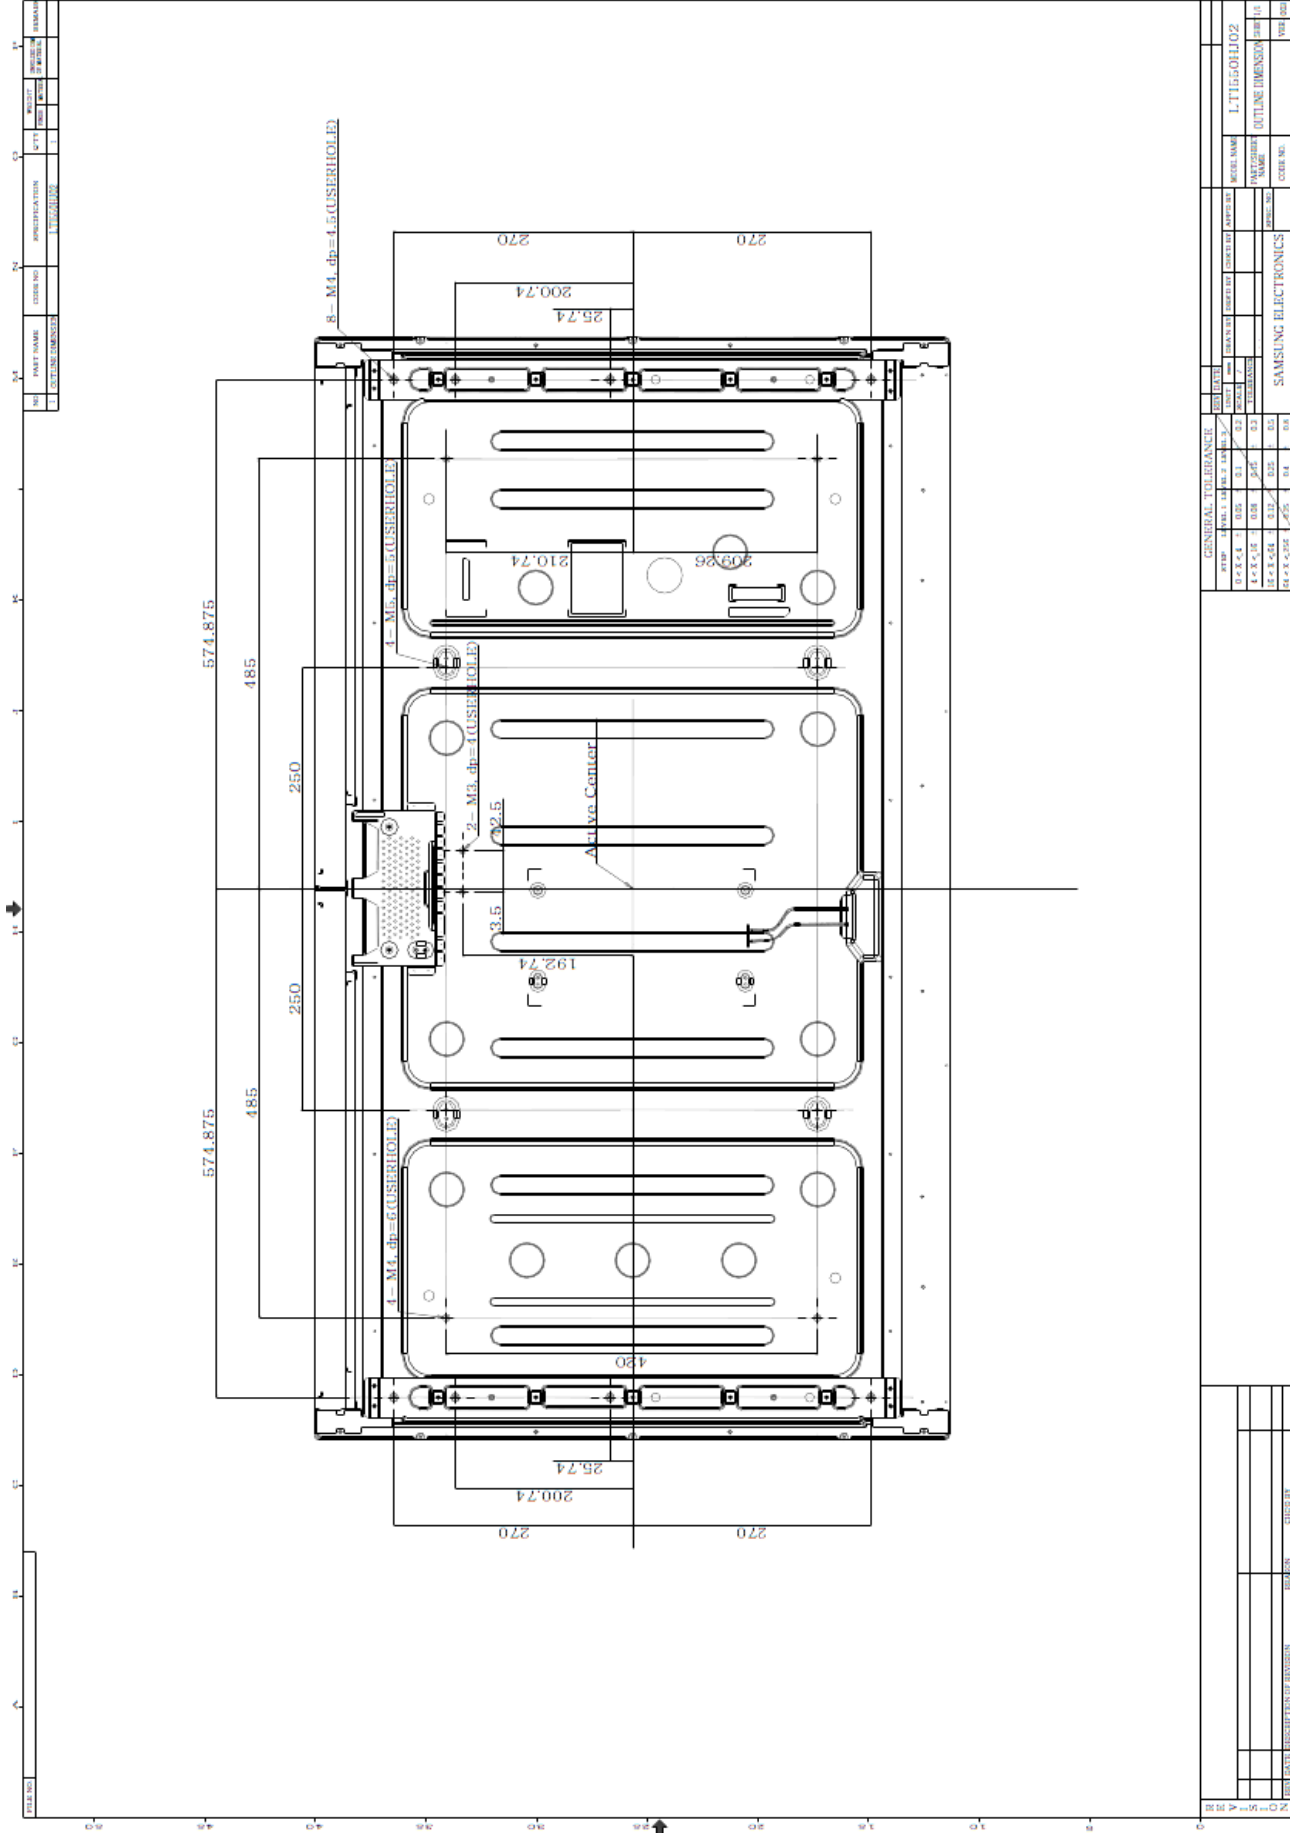

Samsung Confidential

8. PACKING

8.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

**Packing
-Pallet Box**




→ Direction be able to open it


Cushion-Foam




LCD Module

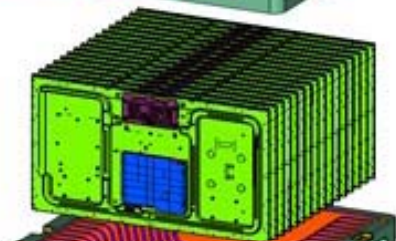

Cushion-Foam

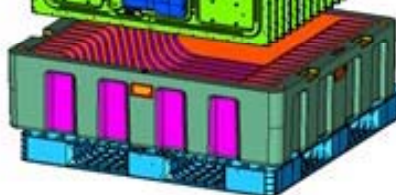

Pallet-Plastic

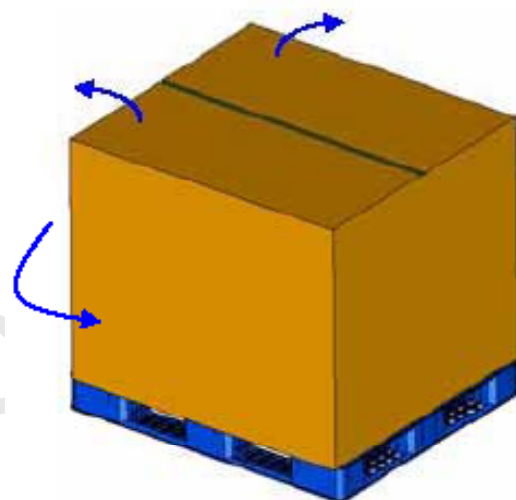

8.2 Packing Specification

Item	Specification	Remark
LCD Packing	14ea / (Packing-Pallet Box)	1. 210 Kg / LCD (14ea) 2. 8.5 Kg / Cushion-pallet (2ea) 3. 10.5 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 10kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1475mm(H) x 1150mm(V) x 995mm(height)
Total Pallet Weight	247.5 kg	Pallet(10kg) + Module(210 kg) + Cushion(17kg) + Pallet-BOX(10.5g)

Samsung Confidential**8.3 Packing Storage condition**

ITEM	Unit	Min.	Max.
Storage Temperature	(℃)	5	40
Storage Humidity	(%rH)	35	75
Storage life	12 months		
Storage Condition	- Prohibit direct sunlight - Ventilation in storehouse and Control changing temperature is within limits of environment - Put it on pallet, don't put it on floor. and store them with removing from wall. - Don't wet Out-BOX and avoid rain. - Without condensation. - Etc. Avoid harmful Condition.		

8.4 Packing long-term Storage guide


Long -term Storage Process	More than 3months Storage or Low temp. Delivery/under 5℃ Storage, →On the 20℃, 50%rH Condition , More than 10hrs release.
----------------------------	--

Samsung Confidential


9. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


- (1) Part number : LTI550HJ02
- (2) Revision: Three letters
- (3) Lot number : X X X X XXX XX X

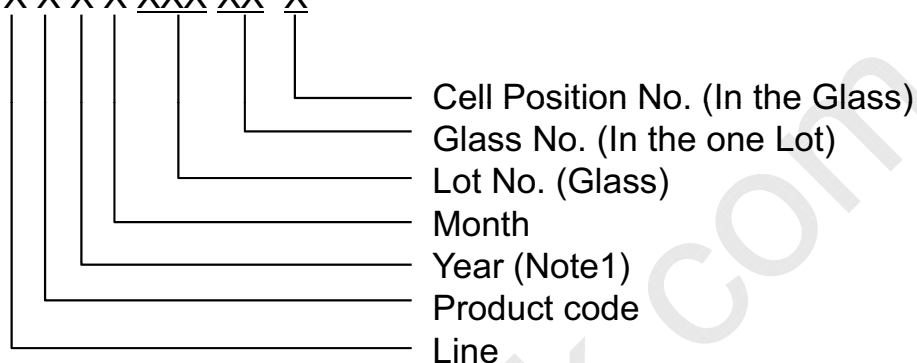

(4) Nameplate Indication

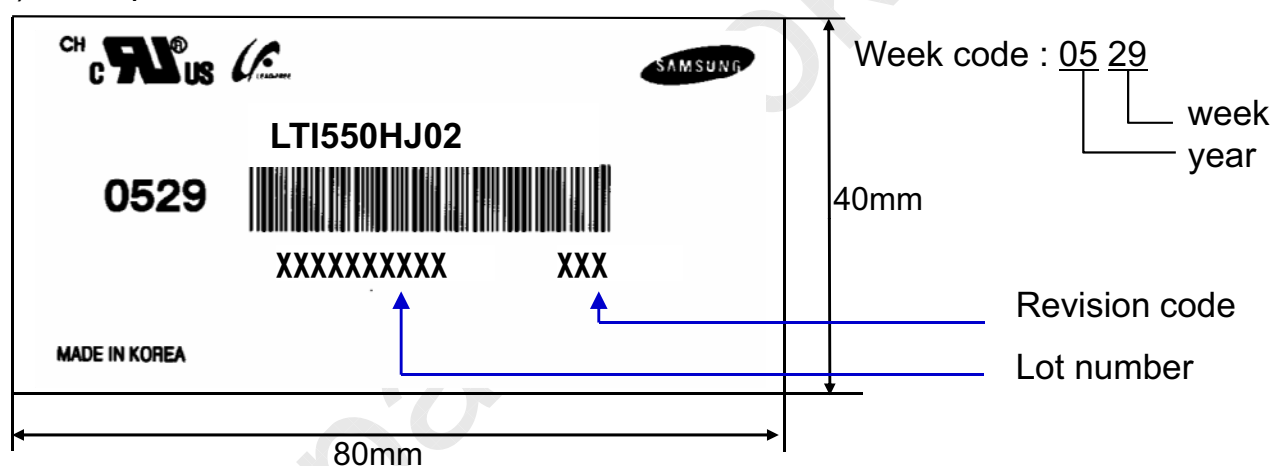

(5) Packing box attach

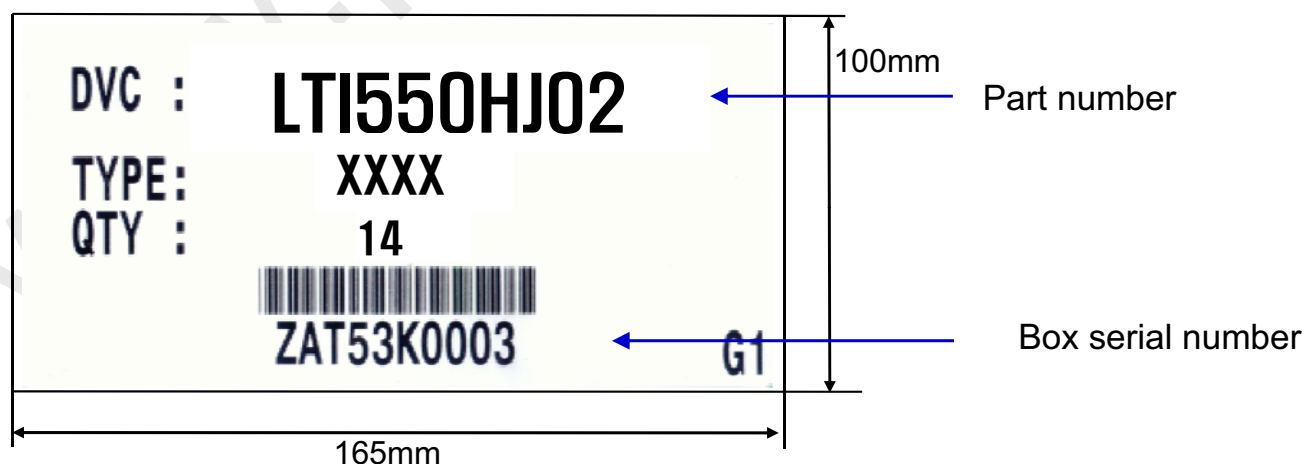

(6) Others

1. After service part

Lamps cannot be replaced because of the narrow bezel structure.

10. General Precautions

Samsung Confidential

10.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.
In addition to damage, this may cause improper operation or damage to the Module and LED back light.
- (d) Note that polarizers are very fragile and could be damage easily.
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or semiconductor would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not disassemble shield case of inverter & LVDS board
- (m) Do not connect N.C pins. (Samsung internal use only)
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handling a module
- (o) Pins of I/F connector should not be touched directly with bare hands.

10.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

10.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of LED(Light Emitted Diode) and may require higher startup voltage(Vs).

10.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
 - Temperature : $20 \pm 15^{\circ}\text{C}$
 - Humidity : $55 \pm 20\%$
 - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

10.5 Others

Samsung Confidential

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Module should be turned clockwise (regular front view perspective) when used in portrait mode
- (c) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (d) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.
- (e) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.
- (f) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (g) Please contact SEC in advance when you display the same pattern for a long time.