



Spec No. :DS20-2019-0092 Effective Date: 02/11/2020

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4



Through Hole Lamp

LTL-R42FGYADH213T

| Rev | <u>Description</u> | <u>By</u> | <u>Date</u> | | | | | |
|-----|--|-------------|-------------|--|--|--|--|--|
| P01 | Preliminary Specification (RDR-20190402-01), Tape & Reel Packing | Javy H. | 05/03/2019 | | | | | |
| P02 | Update Packing Specification | Javy H. | 09/11/2019 | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | Above data for PD and Customer tracking only | | | | | | | |
| - | New Specification Upload On OPNC | Chalerm Ya. | 10/09/2019 | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |



1. Description

CBI (Circuit Board Indicator) is a black plastic right angle Holder (Housing) which mates with Lite-On LED lamps. Lite-On CBI is available in a wide variety of packages, including top-view (Spacer) or right angle and horizontal or vertical arrays which is stackable and easy to assembly.


1.1. Features

- Designed for ease in circuit board assembly.
- Black case enhance contrast ratio.
- Low power consumption & High efficiency.
- Lead free product & RoHS Compliant.
- Emitted color is Yellow green AllnGaP 569nm Lamp & Green diffused lens
- It is in tape and reel packing.

1.2. Applications

- Computer
- Communication
- Consumer
- Industrial

2. Outline Dimensions

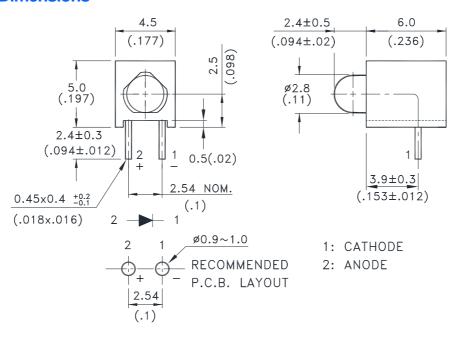

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25mm (.010") unless otherwise noted.
- 3. The Holder (Housing) material is plastic black/dark gray
- 4. LED is green(yellow green) with green diffused Lens.
- 5. Specifications are subject to change without notice.



3. Absolute Maximum Ratings at TA=25°C

| Parameter | Maximum Rating | Unit | |
|--------------------------------------|-------------------------|------|--|
| Power Dissipation | 52 | mW | |
| Peak Forward Current | | | |
| (Duty Cycle≦1/10, Pulse Width≦0.1ms) | 60 | mA | |
| DC Forward Current | 20 | mA | |
| Operating Temperature Range | -30℃ to + 85℃ | | |
| Storage Temperature Range | -40℃ to + 100℃ | | |
| Lead Soldering Temperature | | | |
| [2.0mm (.079") From Body] | 260℃ for 5 Seconds Max. | | |

4. Electrical / Optical Characteristics at TA=25°C

| Parameter | Symbol | Min. | Тур. | Max. | Unit | Test Condition |
|--------------------------|--------|------|------|------|------|------------------------------|
| Luminous Intensity | IV | 8.7 | 15 | 29 | mcd | IF=10mA Note 1,5 |
| Viewing Angle | 201/2 | | 100 | | deg | Note 2 (Fig.6) |
| Peak Emission Wavelength | λР | | 572 | | nm | Measurement @Peak (Fig.1) |
| Dominant Wavelength | λd | 566 | 569 | 574 | nm | IF=10 mA, Note 4 |
| Spectral Line Half-Width | Δλ | | 15 | | nm | |
| Forward Voltage | VF | 1.6 | 2.0 | 2.5 | V | IF=10mA |
| Reverse Current | IR | | | 100 | μΑ | VR = 5V, Note 6 |

NOTE:

- 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2. θ 1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3. Iv classification code is marked on each packing bag.
- 4. The dominant wavelength, λd is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 5. Iv guarantee must be included with ±15% testing tolerance.
- 6. Reverse voltage (VR) condition is applied for IR test only. The device is not designed for reverse operation.

Part No. : LTL-R42FGYADH213T BNS-OD-FC002/A4



5. Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)





Fig.1 Relative Intensity VS.



2.0 Relative Luminous Intensity Normalized at 20mA 1.8 1.6 1.4 1.2 1.0 8.0 0.6 0.4 0.2 80 100 120 0 20 40 60 Ambient Temperature $T_A(^{\circ}C)$

Fig.5 Relative Luminous Intensity VS. Ambient Temperature




Fig.2 Forward Current
Derating Curve




Fig.4 Relative Luminous Intensity vs. Forward Current





Fig.6 Spatial Distribution




6. Packing Specification


Packing Carrier Dimensions

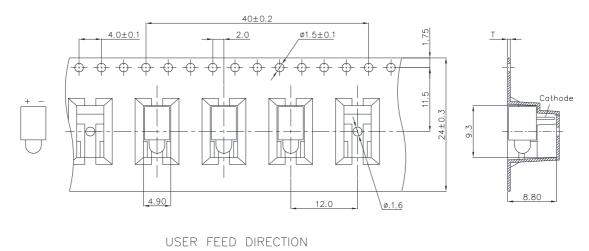

- 1. 10 sprocket hole pitch cumulative tolerance ±0.20
- 2. Material: Black Conductive Polystyrene Alloy
- 3. Thickness of Carrier tape: 0.50 ±0.06 mm
- 4. Component load per 13" reel: 500pcs

Packing Reel Dimensions







7. Bin Table Specification

| Luminous Intensity, Unit: mcd, IF=10mA | | | | |
|--|------|------|--|--|
| lv Bin Code | Min. | Max. | | |
| L3 | 8.7 | 12.6 | | |
| L2 | 12.6 | 19 | | |
| L1 | 19 | 29 | | |

Note: Tolerance of each bin limit is ±15%

| Dominant Wavelength, Unit: nm, IF=10mA | | | | |
|--|-------|-------|--|--|
| Hue Bin Code | Min. | Max. | | |
| H06 | 566.0 | 568.0 | | |
| H07 | 568.0 | 570.0 | | |
| H08 | 570.0 | 572.0 | | |
| H09 | 572.0 | 574.0 | | |

Note: Tolerance of each bin limit is ±1nm



8. CAUTIONS

8.1. Application

This LED lamp is good for application of indoor and outdoor sign, also ordinary electronic equipment.

8.2. Storage

The storage ambient for the LEDs should not exceed 30°C temperature or 70% relative humidity. It is recommended that LEDs out of their original packaging are used within three months. For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant or in desiccators with nitrogen ambient.

8.3. Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LEDs if necessary.

8.4. Lead Forming & Assembly

During lead forming, the leads should be bent at a point at least 3mm from the base of LED lens. Do not use the base of the lead frame as a fulcrum during forming. Lead forming must be done before soldering, at normal temperature. During assembly on PCB, use minimum clinch force possible to avoid excessive mechanical stress.

8.5. Soldering

When soldering, leave a minimum of 2mm clearance from the base of the lens to the soldering point. Dipping the lens into the solder must be avoided. Do not apply any external stress to the lead frame during soldering while the LED is at high temperature.

Recommended soldering conditions:


| | Soldering iron | Wave soldering | | |
|---|--|--|--|--|
| Temperature Soldering time Position | 350°C Max. 3 seconds Max. (one time only) No closer than 2mm from the base of the epoxy bulb | Pre-heat Pre-heat time Solder wave Soldering time Dipping Position | 120℃ Max. 100 seconds Max. 260℃ Max. 5 seconds Max. No lower than 2mm from the base of the epoxy bulb | |

Note: Excessive soldering temperature and/or time might result in deformation of the LED lens or catastrophic failure of the LED.


8.6. Drive Method

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

Circuit model (A)



Circuit model (B)



- (A) Recommended circuit
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.



8.7. ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

Suggestions to prevent ESD damage:

- Use a conductive wrist band or anti- electrostatic glove when handling these LEDs
- All devices, equipment, and machinery must be properly grounded
- Work tables, storage racks, etc. should be properly grounded
- Use ion blower to neutralize the static charge which might have built up on surface of the LEDs plastic lens as a result of friction between LEDs during storage and handing

Suggested checking list:

Training and Certification

- 8.7.1.1. Everyone working in a static-safe area is ESD-certified?
- 8.7.1.2. Training records kept and re-certification dates monitored?

Static-Safe Workstation & Work Areas

- 8.7.2.1. Static-safe workstation or work-areas have ESD signs?
- 8.7.2.2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
- 8.7.2.3. All ionizer activated, positioned towards the units?
- 8.7.2.4. Each work surface mats grounding is good?

Personnel Grounding

- 8.7.3.1. Every person (including visitors) handling ESD sensitive (ESDS) items wear wrist strap, heel strap or conductive shoes with conductive flooring?
- 8.7.3.1. If conductive footwear used, conductive flooring also present where operator stand or walk?
- 8.7.3.2. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V*?
- 8.7.3.3. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
- 8.7.3.4. All wrist strap or heel strap checkers calibration up to date? Note: *50V for Blue LED.

Device Handling

- 8.7.4.1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 8.7.4.2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 8.7.4.3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 8.7.4.4. All flexible conductive and dissipative package materials inspected before reuse or recycle?

Others

- 8.7.5.1. Audit result reported to entity ESD control coordinator?
- 8.7.5.2. Corrective action from previous audits completed?
- 8.7.5.3. Are audit records complete and on file?

Part No.: LTL-R42FGYADH213T BNS-OD-FC002/A4



9. Reliability Test

| Classification | Test Item | Test Condition | Sample Size | Reference Standard |
|-----------------------|--|--|-----------------------------------|--|
| | Operation Life | Ta = Under Room Temperature IF= Per Data Sheet Maximum Rating Test Time= 1000hrs | 22 PCS (CL=90%; LTPD=10%) | MIL-STD-750D:1026 (1995) MIL-STD-883G:1005 (2006) |
| Endurance | High Temperature High Humidity storage (THB) | Ta = 60℃ RH = 90% Test Time= 240hrs | 22 PCS (CL=90%; LTPD=10%) | MIL-STD-202G:103B (2002) JEITA ED-4701:100 103 (2001) |
| Test | High Temperature Storage | Ta= 105 ± 5℃ Test Time= 1000hrs | 22 PCS (CL=90%; LTPD=10%) | MIL-STD-750D:1031 (1995) MIL-STD-883G:1008 (2006) JEITA ED-4701:200 201 (2001) |
| | Low Temperature Storage | Ta= -55 ± 5℃ Test Time= 1000hrs | 22 PCS (CL=90%; LTPD=10%) | JEITA ED-4701:200 202 (2001) |
| | Temperature Cycling | $100^\circ C \sim 25^\circ C \sim -40^\circ C \sim 25^\circ C$ 30mins 5mins 30mins 5mins Test time: 30 Cycles | 22 PCS (CL=90%; LTPD=10%) | MIL-STD-750D:1051 (1995) MIL-STD-883G:1010 (2006) JEITA ED-4701:100 105 (2001) JESD22-A104C (2005) |
| | Thermal Shock | 100 ± 5℃ ~ -30℃ ± 5℃ 15mins 15mins Test time: 30 Cycles | 22 PCS (CL=90%; LTPD=10%) | MIL-STD-750D:1056 (1995) MIL-STD-883G:1011 (2006) MIL-STD-202G:107G (2002) JESD22-A106B (2004) |
| Environmental Test | Solder Resistance | T.sol = 260 ± 5℃ Dwell Time= 10±1 seconds 3mm from the base of the epoxy bulb | 11 PCS (CL=90%; LTPD=18.9%) | MIL-STD-750D:2031(1995) JEITA ED-4701: 300 302 (2001) |
| | Solderability | T. sol = 245 ± 5 °C Dwell Time= 5 ± 0.5 seconds (Lead Free Solder, Coverage ≥ 95 % of the dipped surface) | 11 PCS (CL=90%; LTPD=18.9%) | MIL-STD-750D:2026 (1995) MIL-STD-883G:2003 (2006) MIL-STD-202G:208H (2002) IPC/EIA J-STD-002 (2004) |
| | Soldering Iron | T. sol = 350 ± 5 °C Dwell Time= 3.5 ± 0.5 seconds | 11 PCS (CL=90%; LTPD=18.9%) | MIL-STD-202G:208H (2002) JEITA ED-4701:300 302 (2001) |

10. Others

The appearance and specifications of the product may be modified for improvement, without prior notice.