



Spec No. :DS20-2023-0112 Effective Date: 08/31/2023

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4



Through Hole Lamp

LTLR14FTBEEJH218Y

Rev	<u>Description</u>	<u>By</u>	<u>Date</u>
P01	Preliminary Specification (RDR-20221139-01)	Perry Wang	11/01/2022
P02	Add Vf bin.	Perry Wang	11/02/2022
	Above data for PD and Customer track	ing only	
-	New Specification, Upload in OPB2 system	Chalerm Ya.	08/18/2023



1. Description

CBI (Circuit Board Indicator) is a black plastic right angle Holder (Housing) which mates with Lite-On LED lamps. Lite-On CBI is available in a wide variety of packages, including top-view (Spacer) or right angle and horizontal or vertical arrays which is stackable and easy to assembly.


1. 1. Features

- Designed for ease in circuit board assembly.
- Black case enhance contrast ratio.
- Solid state light source.
- Low power consumption & High efficiency.
- Lead free product & RoHS Compliant.

1.2. Applications

- Computer
- Communication
- Consumer
- Industrial

2. Outline Dimensions

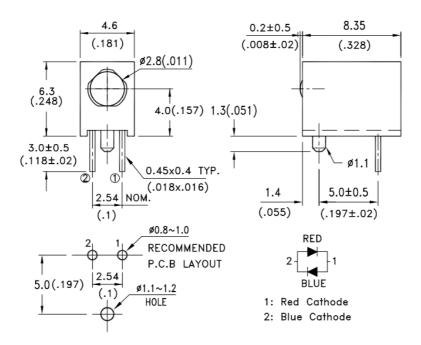

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ± 0.25 mm (.010") unless otherwise noted.
- 3. The Holder (Housing) material is PA9T black.
- 4. LED is blue color and red color with white diffused lens.
- 5. Specifications are subject to change without notice.



3. Absolute Maximum Ratings at TA=25°C

Parameter	Red	Blue	Unit			
Power Dissipation	52	76	mW			
Peak Forward Current						
(Duty Cycle≦1/10, Pulse Width≦10µs)	60	60	mA			
DC Forward Current	20	20	mA			
Operating Temperature Range	-30℃ to + 85℃					
Storage Temperature Range	-40℃ to + 100℃					
Lead Soldering Temperature						
[2.0mm (.079") From Body]	260℃ for 5 Seconds Max.					

4. Electrical / Optical Characteristics at TA=25℃

Parameter	Symbol	Color	Min.	Тур.	Max.	Unit	Test Condition
Radiant Intensity	lv	Red Blue	30 65	85 110	140 310	mcd	IF = 10mA Note 1,4
Viewing Angle	201/2	Red Blue		100		deg	Note 2 (Fig.6)
Peak Emission Wavelength	λР	Red Blue		632 468		nm	Measurement @Peak (Fig.1)
Dominant Wavelength	λd	Red Blue	617 460	624 470	630 475	nm	Note 3
Spectral Line Half-Width	Δλ	Red Blue		20 25		nm	
Forward Voltage	VF	Red Blue	1.7 2.6	3.2	2.4 3.6	V	IF = 10mA
Reverse Current	IR	Red Blue			10	μA	VR = 5V

NOTE:

- 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2. θ 1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3. Iv classification code is marked on each packing bag.
- 4. The dominant wavelength, λd is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 5. Iv guarantee must be included with ±15% testing tolerance.
- 6. Reverse voltage (VR) condition is applied for IR test only. The device is not designed for reverse operation.



5. Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)





Fig.1 Relative Intensity VS. Wavelength






Fig.5 Relative Luminous Intensity VS. Ambient Temperature




Fig.2 Forward Current Derating Curve




Fig.4 Relative Luminous Intensity vs. Forward Current





Fig.6 Spatial Distribution



6. Packing Specification



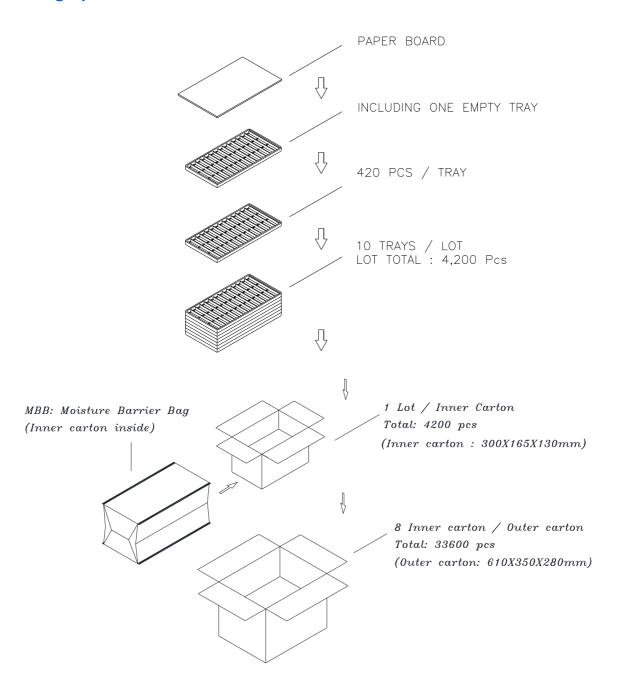

7. Bin Table Specification

Bin Code	Luminous Intensity (Red) Unit : mcd @10mA		Bin Code	Luminous Intensity (Blue) Unit : mcd @10mA	
	Min.	Max.		Min.	Max.
AB	30	50	DE	65	110
CD	50	85	FG	110	180
EF	85	140	HJ	180	310

Note: Tolerance of each bin limit is ±30%

Bin Code	Forward Voltage (Blue) Unit : V @10mA			
	Min	Max		
5A	2.6	2.8		
6A	2.8	3.0		
7A	3.0	3.2		
8A	3.2	3.4		
9A	3.4	3.6		

Note: Tolerance of each bin limit is ±0.1V

	Dominant Wavelength (Blue)				
Bin Code	Unit : nm @10mA				
	Min.	Max.			
B1	460.0	465.0			
B2	465.0	470.0			
В3	470.0	475.0			

Note: Tolerance of each bin limit is ± 1 nm



8. CAUTIONS

8.1. Application

This LED lamp is good for application of indoor and outdoor sign, also ordinary electronic equipment.

8.2. Storage

The package is sealed:

The LEDs should be stored at 30℃ or less and 70%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The storage ambient for the LEDs should not exceed 30℃ temperature and 60% relative humidity.

It is recommended that LEDs out of their original packaging are IR-reflowed within 168hrs.

For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant, or in a desiccators with nitrogen ambient.

LEDs stored out of their original packaging for more than 168hrs should be baked at about 60 deg C for at least 48 hours before solder assembly.

For unused component, we strongly suggest to do baking following above condition before go SMT assembly process (IR reflow) if the MBB had been opened over 168 hours to prevent MBB from not repacking well or environment moisture over standard required condition which might cause the LEDs function fail.

8.3. Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LEDs if necessary.

8.4. Lead Forming & Assembly

During lead forming, the leads should be bent at a point at least 3mm from the base of LED lens. Do not use the base of the lead frame as a fulcrum during forming. Lead forming must be done before soldering, at normal temperature. During assembly on PCB, use minimum clinch force possible to avoid excessive mechanical stress.

8.5. Soldering

When soldering, leave a minimum of 2mm clearance from the base of the lens/Holder to the soldering point. Dipping the lens/Holder into the solder must be avoided. Do not apply any external stress to the lead frame during soldering while the LED is at high temperature.


Recommended soldering conditions:

	Soldering iron	Wave soldering		
Temperature Soldering time Position	350°C Max. 3 seconds Max. (one time only) No closer than 2mm from the base of the epoxy bulb	Pre-heat Pre-heat time Solder wave Soldering time Dipping Position	120℃ Max. 100 seconds Max. 260℃ Max. 5 seconds Max. No lower than 2mm from the base of the epoxy bulb	



Reflow					
Profile Feature	Conditions				
Preheat/Soak					
Temperature Min. (T _{smin})	150 °ℂ				
Temperature Max. (T _{smax})	200 °ℂ				
Time (t _s) from (T _{smin} to T _{smax})	100 seconds Max.				
Liquidous temperature (T _L)	217℃				
Time (t _L) maintained above T _L	60~90 seconds				
Peak temperature (T _P)*	250 ℃				
Specified classification temperature (T _C)	245 ℃				
Time (t _P) within 5° C of the temperature T_{C}	30 seconds Max.				
Time 25°C to peak temperature	5 minutes Max.				

Profile for Reference

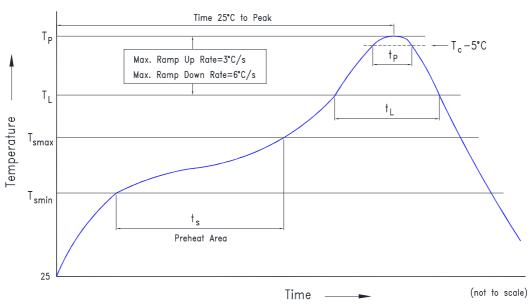

Note:

- 1. Excessive soldering temperature and/or time might result in deformation of the LED lens or catastrophic failure of the LED.
- 2. Max temperature of wave soldering is not means that Holder's HDT/Melting temperature.
- 3. Clinch lead frame would cause stress, and might catastrophic failure of the LED when stress at high temperature.





8.6. Drive Method

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

Circuit model (A)

Circuit model (B)





- (A) Recommended circuit
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

8.7. ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

Suggestions to prevent ESD damage:

- Use a conductive wrist band or anti- electrostatic glove when handling these LEDs
- All devices, equipment, and machinery must be properly grounded
- Work tables, storage racks, etc. should be properly grounded
- Use ion blower to neutralize the static charge which might have built up on surface of the LEDs plastic lens as a result of friction between LEDs during storage and handing

Suggested checking list:

Training and Certification

- 8.7.1.1. Everyone working in a static-safe area is ESD-certified?
- 8.7.1.2. Training records kept and re-certification dates monitored?

Static-Safe Workstation & Work Areas

- 8.7.2.1. Static-safe workstation or work-areas have ESD signs?
- 8.7.2.2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
- 8.7.2.3. All ionizer activated, positioned towards the units?
- 8.7.2.4. Each work surface mats grounding is good?

Personnel Grounding

- 8.7.3.1. Every person (including visitors) handling ESD sensitive (ESDS) items wear wrist strap, heel strap or conductive shoes with conductive flooring?
- 8.7.3.1. If conductive footwear used, conductive flooring also present where operator stand or walk?
- 8.7.3.2. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V*?
- 8.7.3.3. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
- 8.7.3.4. All wrist strap or heel strap checkers calibration up to date?
 - Note: *50V for Blue LED.

Device Handling

- 8.7.4.1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 8.7.4.2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 8.7.4.3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 8.7.4.4. All flexible conductive and dissipative package materials inspected before reuse or recycle?

Others

- 8.7.5.1. Audit result reported to entity ESD control coordinator?
- 8.7.5.2. Corrective action from previous audits completed?
- 8.7.5.3. Are audit records complete and on file?



9. Reliability Test

Classification	Test Item	Test Condition	Sample Size	Reference Standard
	Operation Life	Ta = Under Room Temperature IF= Per Data Sheet Maximum Rating Test Time= 1000hrs	22 PCS (CL=90%; LTPD=10%)	MIL-STD-750D:1026 (1995) MIL-STD-883G:1005 (2006)
Endurance	High Temperature High Humidity storage (THB)	Ta = 60℃ RH = 90% Test Time= 240hrs	22 PCS (CL=90%; LTPD=10%)	MIL-STD-202G:103B (2002) JEITA ED-4701:100 103 (2001)
Test	High Temperature Storage	Ta= 105 ± 5℃ Test Time= 1000hrs	22 PCS (CL=90%; LTPD=10%)	MIL-STD-750D:1031 (1995) MIL-STD-883G:1008 (2006) JEITA ED-4701:200 201 (2001)
	Low Temperature Storage	Ta= -55 ± 5℃ Test Time= 1000hrs	22 PCS (CL=90%; LTPD=10%)	JEITA ED-4701:200 202 (2001)
	Temperature Cycling	$100^\circ C \sim 25^\circ C \sim -40^\circ C \sim 25^\circ C$ 30mins 5mins 30mins 5mins Test time: 30 Cycles	22 PCS (CL=90%; LTPD=10%)	MIL-STD-750D:1051 (1995) MIL-STD-883G:1010 (2006) JEITA ED-4701:100 105 (2001) JESD22-A104C (2005)
	Thermal Shock	100 ± 5℃ ~ -30℃ ± 5℃ 15mins 15mins Test time: 30 Cycles	22 PCS (CL=90%; LTPD=10%)	MIL-STD-750D:1056 (1995) MIL-STD-883G:1011 (2006) MIL-STD-202G:107G (2002) JESD22-A106B (2004)
Environmental Test	Solder Resistance	T.sol = 260 ± 5℃ Dwell Time= 10±1 seconds 3mm from the base of the epoxy bulb	11 PCS (CL=90%; LTPD=18.9%)	MIL-STD-750D:2031(1995) JEITA ED-4701: 300 302 (2001)
	Solderability	T. sol = 245 ± 5 °C Dwell Time= 5 ± 0.5 seconds (Lead Free Solder, Coverage ≥ 95 % of the dipped surface)	11 PCS (CL=90%; LTPD=18.9%)	MIL-STD-750D:2026 (1995) MIL-STD-883G:2003 (2006) MIL-STD-202G:208H (2002) IPC/EIA J-STD-002 (2004)
	Soldering Iron	T. sol = 350 ± 5 °C Dwell Time= 3.5 ± 0.5 seconds	11 PCS (CL=90%; LTPD=18.9%)	MIL-STD-202G:208H (2002) JEITA ED-4701:300 302 (2001)

10. Others

The appearance and specifications of the product may be modified for improvement, without prior notice.