



Spec No. :DS20-2023-0025 Effective Date: 02/28/2023

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4



Through Hole Lamp LTLR42FTBK4KHBPT

Through Hole Lamp

LTLR42FTBK4KHBPT

Rev	<u>Description</u>	<u>By</u>	<u>Date</u>
P01	Preliminary Specification (RDR-20220795)	Tina JH Chen	07/22/2022
P02	Update VF spec.	Perry Wang	10/03/2022
	Above data for PD and Customer track	ing only	
-	New Specification, Upload in OPB2 system	Chalerm Ya.	02/22/2023



Through Hole Lamp LTLR42FTBK4KHBPT

1. Description

CBI (Circuit Board Indicator) is a black plastic right angle Holder (Housing) which mates with Lite-On LED lamps. Lite-On CBI is available in a wide variety of packages, including top-view (Spacer) or right angle and horizontal or vertical arrays which is stackable and easy to assembly.


1.1. Features

- Designed for ease in circuit board assembly
- Solid state light source
- Low power consumption & High efficiency
- Lead free product & RoHS Compliant
- T-1 lamp: emitted color is InGaN 470nm blue chip
- It is in tape and reel packing

1.2. Applications

- Computer
- Communication
- Consumer
- Industrial

2. Outline Dimensions

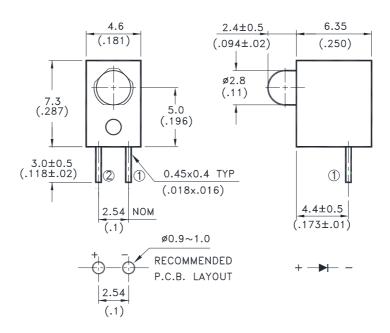

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25mm (.010") unless otherwise noted.
- 3. The Holder (Housing) material is plastic / black.
- 4. LED lamp is blue color with water clear lens.
- 5. Specifications are subject to change without notice.



Through Hole Lamp LTLR42FTBK4KHBPT

3. Absolute Maximum Ratings at TA=25°C

Parameter	Maximum Rating	Unit	
Power Dissipation	76	mW	
Peak Forward Current			
(Duty Cycle≦1/10, Pulse Width≦10µs)	100	mA	
DC Forward Current	20	mA	
Derating Linear From 30℃	0.273	mA/℃	
Operating Temperature Range	-30℃ to + 80℃		
Storage Temperature Range	-40℃ to + 100℃		
Lead Soldering Temperature			
[2.0mm (.079") From Body]	260℃ for 5 Seconds Max.		

4. Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
	IV	140	400	680	mcd	IF = 20mA
Luminous Intensity						Note 1, 5
Viewing Angle	201/2		45		deg	Note 2 (Fig.6)
	λР	468	469	400	nm	Measurement
Peak Emission Wavelength			400			@Peak (Fig.1)
Dominant Wavelength	λd	465	470	475	nm	Note 4
Spectral Line Half-Width	Δλ		25		nm	
Forward Voltage	VF	2.7	3.2	3.4	V	IF = 20mA
Reverse Current	IR			10	μA	VR = 5V

NOTE:

- 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- $2. \theta 1/2$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3. Iv classification code is marked on each packing bag.
- 4. The dominant wavelength, λd is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 5. Iv guarantee must be included with ±15% testing tolerance.
- 6. Reverse voltage (VR) condition is applied for IR test only. The device is not designed for reverse operation.



Through Hole Lamp LTLR42FTBK4KHBPT

5. Typical Electrical / Optical Characteristics Curves

(25° C Ambient Temperature Unless Otherwise Noted)





Fig.1 Relative Intensity VS. Wavelength






Fig.5 Relative Luminous Intensity VS. Ambient Temperature




Fig.2 Forward Current
Derating Curve




Fig.4 Relative Luminous Intensity vs. Forward Current





Fig.6 Spatial Distribution



Through Hole Lamp LTLR42FTBK4KHBPT


6. Packing Specification

Packing Carrier Dimensions

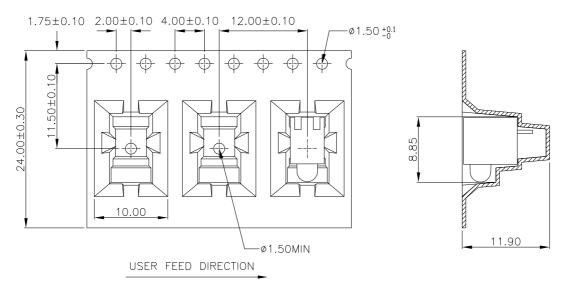

- 1. 10 sprocket hole pitch cumulative tolerance ±0.20
- 2. Material : Black Conductive Polystyrene Alloy
- 3. Thickness of Carrier tape : $0.50 \pm 0.06 \text{ mm}$
- 4. Component load per 13" reel: 400pcs

Packing Reel Dimensions

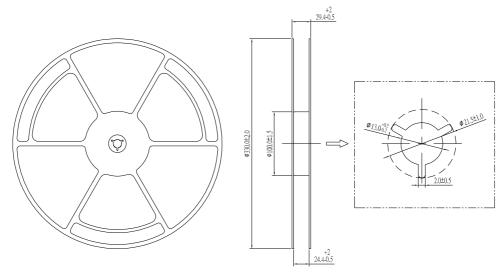




Through Hole Lamp LTLR42FTBK4KHBPT

Carton Specification

- 1 Reel with Humidity indicator card and Desiccant are packed in 1 Moisture Barrier Bag (MBB)
- 2 Moisture Barrier Bags packed in 1 Inner Carton


Total 800pcs (400pcs * 2) per Inner Carton



INNER CARTON
361 x 358 x 75 mm

10 Inner Cartons per Outer Carton

Total 8,000pcs (800pcs*10) per Outer Carton



OUTER CARTON 740 x 390 x 395 mm



Through Hole Lamp LTLR42FTBK4KHBPT

7. Bin Table Specification

Luminous Intensity Unit: mcd @20mA						
Bin Code	Min.	Max.				
Н	180	240				
J	240	310				
К	310	400				
L	400	520				
M	520	680				

Note: Tolerance of each bin limit is ±15%

Dominant Wavelength Unit : nm @20mA					
Bin Code	Min	Max			
B08	465.0	470.0			
B09	470.0	475.0			

Note: Tolerance of each bin limit is ±1nm



Through Hole Lamp LTLR42FTBK4KHBPT

8. CAUTIONS

8.1. Application

This LED lamp is good for application of indoor and outdoor sign, also ordinary electronic equipment.

8.2. Storage

The package is sealed:

The LEDs should be stored at 30°C or less and 70%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The storage ambient for the LEDs should not exceed 30℃ temperature and 60% relative humidity.

It is recommended that LEDs out of their original packaging are IR-reflowed within 168hrs.

For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant, or in a desiccators with nitrogen ambient.

LEDs stored out of their original packaging for more than 168hrs should be baked at about 60 deg C for at least 48 hours before solder assembly.

For unused component, we strongly suggest to do baking following above condition before go SMT assembly process (IR reflow) if the MBB had been opened over 168 hours to prevent MBB from not repacking well or environment moisture over standard required condition which might cause the LEDs function fail.

8.3. Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LEDs if necessary.

8.4. Lead Forming & Assembly

During lead forming, the leads should be bent at a point at least 3mm from the base of LED lens. Do not use the base of the lead frame as a fulcrum during forming. Lead forming must be done before soldering, at normal temperature. During assembly on PCB, use minimum clinch force possible to avoid excessive mechanical stress.

8.5. Soldering

When soldering, leave a minimum of 2mm clearance from the base of the lens/Holder to the soldering point. Dipping the lens/Holder into the solder must be avoided. Do not apply any external stress to the lead frame during soldering while the LED is at high temperature.

Recommended soldering conditions:

	Soldering iron	Wave soldering		
Temperature Soldering time Position	350℃ Max. 3 seconds Max. (one time only) No closer than 2mm from the base of the epoxy bulb	Pre-heat Pre-heat time Solder wave Soldering time Dipping Position	100℃ Max. 60 seconds Max. 260℃ Max. 5 seconds Max. No lower than 2mm from the base of the epoxy bulb	


Note: Excessive soldering temperature and/or time might result in deformation of the LED lens or catastrophic failure of the LED. IR reflow is not suitable process for through hole type LED lamp product. Max temperature of wave soldering is not means that Holder's HDT/Melting temperature.



Through Hole Lamp LTLR42FTBK4KHBPT

Reflow				
Profile Feature	Conditions			
Preheat/Soak				
Temperature Min. (T _{smin})	150 °ℂ			
Temperature Max. (T _{smax})	200 °ℂ			
Time (t _s) from (T _{smin} to T _{smax})	120 seconds Max.			
Liquidous temperature (T _L)	217 ℃			
Time (t _L) maintained above T _L	60~150 seconds			
Peak temperature (T _P)*	255 ℃			
Specified classification temperature (T _C)	250 °ℂ			
Time (t _P) within 5° C of the temperature T_{C}	30 seconds Max.			
Time 25°C to peak temperature	5 minutes Max.			

Profile for Reference

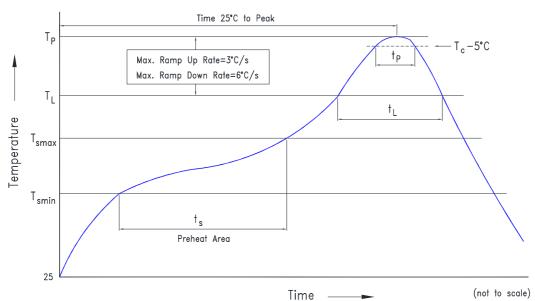

Note: Excessive soldering temperature and/or time might result in deformation of the LED lens or catastrophic failure of the LED.




Through Hole Lamp LTLR42FTBK4KHBPT


8.6. Drive Method

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

Circuit model (A)

Circuit model (B)





- (A) Recommended circuit
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

8.7. ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

Suggestions to prevent ESD damage:

- Use a conductive wrist band or anti- electrostatic glove when handling these LEDs
- All devices, equipment, and machinery must be properly grounded
- Work tables, storage racks, etc. should be properly grounded
- Use ion blower to neutralize the static charge which might have built up on surface of the LEDs plastic lens as a result of friction between LEDs during storage and handing

Suggested checking list:

Training and Certification

- 8.7.1.1. Everyone working in a static-safe area is ESD-certified?
- 8.7.1.2. Training records kept and re-certification dates monitored?

Static-Safe Workstation & Work Areas

- 8.7.2.1. Static-safe workstation or work-areas have ESD signs?
- 8.7.2.2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
- 8.7.2.3. All ionizer activated, positioned towards the units?
- 8.7.2.4. Each work surface mats grounding is good?

Personnel Grounding

- 8.7.3.1. Every person (including visitors) handling ESD sensitive (ESDS) items wear wrist strap, heel strap or conductive shoes with conductive flooring?
- 8.7.3.1. If conductive footwear used, conductive flooring also present where operator stand or walk?
- 8.7.3.2. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V*?
- 8.7.3.3. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
- 8.7.3.4. All wrist strap or heel strap checkers calibration up to date?

Device Handling

- 8.7.4.1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 8.7.4.2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 8.7.4.3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 8.7.4.4. All flexible conductive and dissipative package materials inspected before reuse or recycle?

Others

- 8.7.5.1. Audit result reported to entity ESD control coordinator?
- 8.7.5.2. Corrective action from previous audits completed?
- 8.7.5.3. Are audit records complete and on file?



Through Hole Lamp LTLR42FTBK4KHBPT

9. Reliability Test

Classification	Test Item	Test Condition	Sample Size	Reference Standard
	Operation Life	Ta = Under Room Temperature IF= Per Data Sheet Maximum Rating Test Time= 1000hrs	22 PCS (CL=90%; LTPD=10%)	MIL-STD-750D:1026 (1995) MIL-STD-883G:1005 (2006)
Endurance	High Temperature High Humidity storage	Ta = 60℃ RH = 90% Test Time= 240hrs	22 PCS (CL=90%; LTPD=10%)	MIL-STD-202G:103B (2002) JEITA ED-4701:100 103 (2001)
Test	High Temperature Storage	Ta= 105 ± 5℃ Test Time= 1000hrs	22 PCS (CL=90%; LTPD=10%)	MIL-STD-750D:1031 (1995) MIL-STD-883G:1008 (2006) JEITA ED-4701:200 201 (2001)
	Low Temperature Storage	Ta= -55 ± 5℃ Test Time= 1000hrs	22 PCS (CL=90%; LTPD=10%)	JEITA ED-4701:200 202 (2001)
	Temperature Cycling	$100^\circ C \sim 25^\circ C \sim -40^\circ C \sim 25^\circ C$ 30mins 5mins 30mins 5mins 30 Cycles	22 PCS (CL=90%; LTPD=10%)	MIL-STD-750D:1051 (1995) MIL-STD-883G:1010 (2006) JEITA ED-4701: 100 105(2001) JSED22-A104C (2005)
Environmental	Thermal Shock	$100 \pm 5\% \sim -30\% \pm 5\%$ 15 mins 15mins 30 Cycles	22 PCS (CL=90%; LTPD=10%)	MIL-STD-750D:1051(1995) MIL-STD-883G:1011 (2006) MIL-STD-202G:107G (2002) JSED22-A106B (2004)
Test	Solder Resistance	T.sol = 260 ℃ Max Dwell Time= 5secs Max	11 PCS (CL=90%; LTPD=18.9%)	MIL-STD-202F:210A(1980) MIL-STD-750D:2031(1995) JIS C 7021: A-1(1982)
	Solderability	T. sol = 245 ± 5 °C Dwell Time= 5 ± 1 secs	11 PCS (CL=90%; LTPD=18.9%)	MIL-STD-750D:2026(1995) MIL-STD-883G:2003(2006) MIL-STD-202G:208H(2002) IPC/EIA J-STD-002(2004)

10. Others

The appearance and specifications of the product may be modified for improvement, without prior notice.