



DATE : Mar. 28, 2011

**SAMSUNG TFT-LCD****MODEL NO. : LTN101AT03**

NOTE : Extension code [ D ]  
→ LTN101AT03-D  
Surface type [ **Glare** ]

*The information described in this SPEC is preliminary and can be changed without prior notice.*

**Application engineering Group  
Samsung Electronics Co., Ltd.**

**Samsung Confidential**

**CONTENTS**

Revision History	----- ( 3 )
General Description	----- ( 4 )
1. Absolute Maximum Ratings	----- ( 5 )
1.1 Absolute Ratings of environment	
1.2 Electrical Absolute Ratings	
2. Optical Characteristics	----- ( 7 )
3. Electrical Characteristics	----- ( 10 )
3.1 TFT LCD Module	
3.2 Backlight Unit	
3.3 LED Driver	
4. Block Diagram	----- ( 13 )
4.1 TFT LCD Module	
4.2 LED Placement Structure	
5. Input Terminal Pin Assignment	----- ( 14 )
5.1 Input Signal & Power	
5.2 LVDS Interface	
5.3 Timing Diagrams of LVDS For Transmitting	
5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color.	
5.5 Pixel format	
6. Interface Timing	----- ( 20 )
6.1 Timing Parameters	
6.2 Timing Diagrams of interface Signal	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	----- ( 23 )
8. Packing	----- ( 25 )
9. Markings & Others	----- ( 26 )
10. General Precautions	----- ( 28 )
11. EDID	----- ( 30 )

# REVISION HISTORY

Approval

Date	Revision No.	Page	Summary
Mar. 28. 2011	A00	All	The specification of LTN101AT03-D was issued first.

**Samsung Confidential**

**Doc.No.**

LTN101AT03-D

**Rev.No**

04-A00-G-110328

**Page**

3 / 32

## GENERAL DESCRIPTION

### DESCRIPTION

LTN101AT03 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight unit. The resolution of a 10.1" contains 1366 x 768 pixels and can display up to 262,144 colors. 6 O'clock direction is the optimum viewing angle.

### FEATURES

- High contrast ratio
- HD (1366 x 768 pixels ) resolution
- Low power consumption
- Fast Response
- LED Back Light with embedded LED Driver
- DE (Data enable) only mode
- 3.3V LVDS Interface
- Onboard EEDID chip
- Green product (RoHS compliant)

### APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

## GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	222.73(H) x 125.22(V) ( 10.1" diagonal )	mm	
Driver element	a-Si TFT active matrix		
Display colors	262,144		
Number of pixel	1366 x 768	pixel	
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.16305(H) x 0.16305(V)	mm	TYP
Display Mode	Normally white		
Surface treatment	Haze 0% , Hard-Coating 3H		

**Samsung Confidential**

## Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	234.5	235.0	235.5	mm	(1)
	Vertical (V)	142.5	143.0	143.5	mm	
	Depth (D)	-	-	5.2	mm	
Weight		-	-	210	g	


Note (1) Measurement condition of outline dimension  
. Equipment : Bernier Calipers  
. Push Force : 500g · f (minimum)

## 1. ABSOLUTE MAXIMUM RATINGS

## 1.1 ENVIRONMENTAL ABSOLUTE RATINGS

Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	TSTG	-20	60	°C	(1)
Operating temperate (Temperature of glass surface)	TOPR	0	50	°C	(1)
Shock ( non-operating )	Snop	-	240	G	(2),(4)
Vibration (non-operating)	Vnop	-	2.41	G	(3),(4)

Note (1) Temperature and relative humidity range are shown in the figure below.  
95 % RH Max. ( $40\text{ °C} \geq T_a$ )  
Maximum wet - bulb temperature at  $39\text{ °C}$  or less. ( $T_a > 40\text{ °C}$ ) No condensation

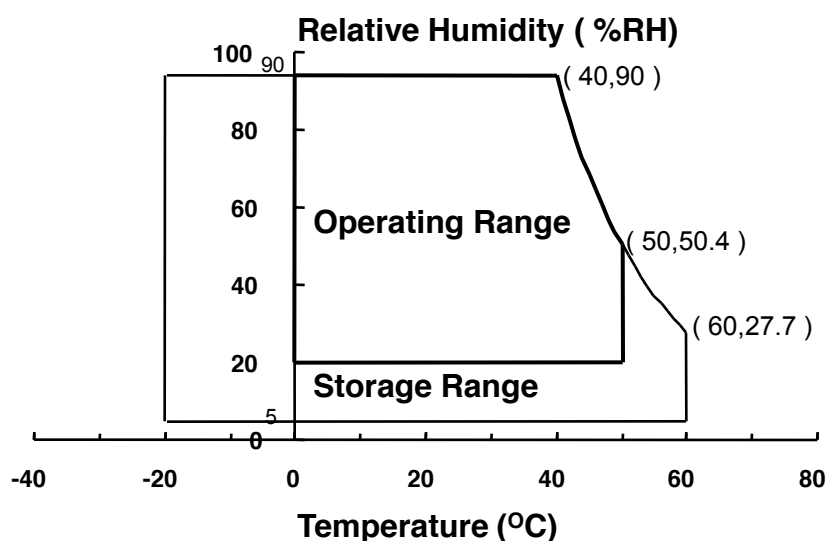

- (2) 2ms, half sine wave, one time for  $\pm X$ ,  $\pm Y$ ,  $\pm Z$ .  
(3) 5 - 500 Hz, random vibration, 30min for X, Y, Z.  
(4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

Samsung Confidential

## 1.2 ELECTRICAL ABSOLUTE RATINGS

## (1) TFT LCD MODULE

 $V_{DD} = 3.3V, V_{SS} = GND = 0V$ 

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	$V_{DD}$	$V_{DD} - 0.3$	$V_{DD} + 0.3$	V	(1)
Logic Input Voltage	$V_{IN}$	$V_{DD} - 0.3$	$V_{DD} + 0.3$	V	(1)

Note (1) Within  $T_a$  ( $25 \pm 2$  °C )

## 2. OPTICAL CHARACTERISTICS


The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5).  
Measuring equipment : TOPCON SR-3

\* Ta = 25 ± 2 °C, V<sub>DD</sub>=3.3V, fv= 60Hz, f<sub>DCLK</sub> = 71MHz, IL = 25.5 mA

Item		Symbol	Condition	Min.	Typ.	Max	Unit	Note
Contrast Ratio (5 Points)		CR	Normal Viewing Angle $\phi = 0$ $\theta = 0$	300	-	-	-	(1), (2), (5)
Response Time at Ta ( Rising + Falling )		T <sub>RT</sub>		-	16	25	msec	(1), (3)
Average Luminance of White (5 Points)		Y <sub>L,AVE</sub>		170	200	-	cd/m <sup>2</sup>	IF=25.5mA (1), (4)
Color Chromaticity ( CIE )	Red	R <sub>X</sub>		0.523	0.553	0.583	-	(1), (5) SR-3
		R <sub>Y</sub>		0.317	0.347	0.377		
	Green	G <sub>X</sub>		0.322	0.352	0.382		
		G <sub>Y</sub>		0.556	0.586	0.616		
	Blue	B <sub>X</sub>		0.135	0.165	0.195		
		B <sub>Y</sub>		0.080	0.110	0.140		
	White	W <sub>X</sub>		0.283	0.313	0.343		
		W <sub>Y</sub>	0.299	0.329	0.359			
Color Gamut			42	45	-	%		
Viewing Angle	Hor.	$\theta_L$	CR ≥ 10 At center	40	-	-	Degrees	(1), (5) SR-3
		$\theta_H$		40	-	-		
	Ver.	$\phi_H$		15	-	-		
		$\phi_L$		30	-	-		
	Hor.	$\theta_L$	CR ≥ 100	25	-	-	Degrees	
		$\theta_R$		25	-	-		
	Ver.	$\phi_H$		5	-	-		
		$\phi_L$		15	-	-		
13 Points White Variation		$\delta_L$		-	-	1.54	-	(6)

**Samsung Confidential**

Note 1) Definition of Viewing Angle : Viewing angle range( $10 \leq C/R$ )

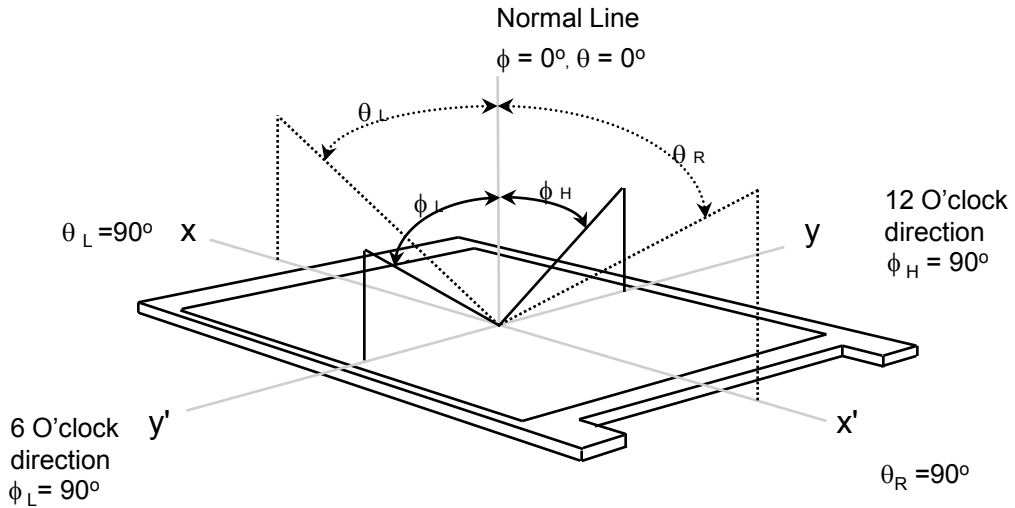


Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax), gray min (Gmin) at 5 points(4, 5, 7, 9, 10)


$$CR = \frac{CR(4) + CR(5) + CR(7) + CR(9) + CR(10)}{5}$$

Points : (4), (5), (7), (9), (10) at the figure of Note (6).

Note 3) Definition of Response time :

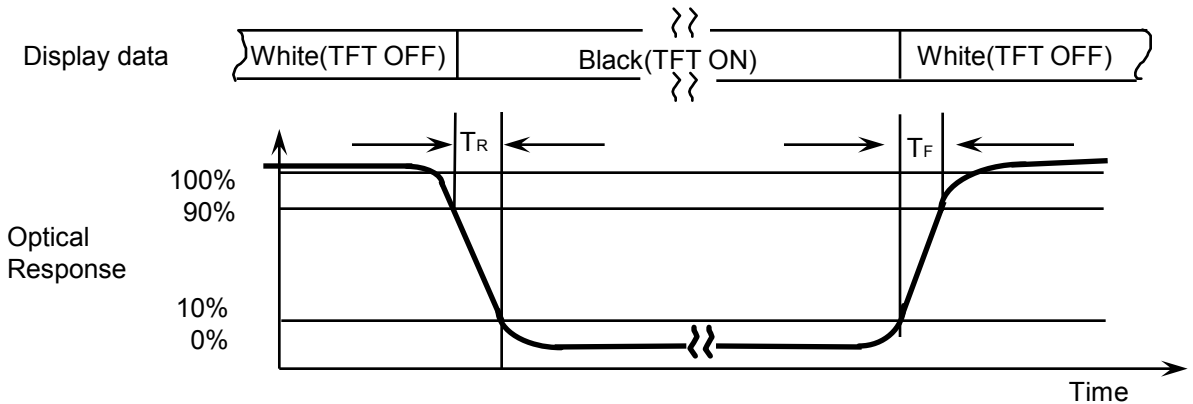

Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.

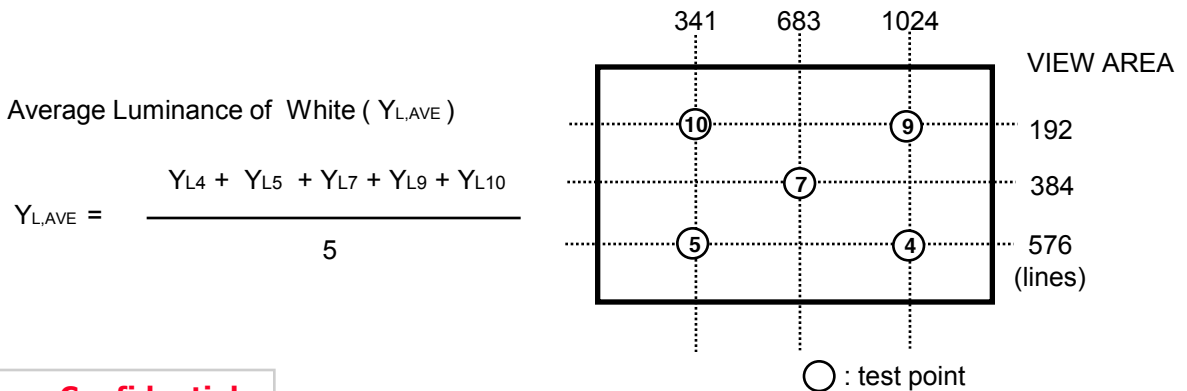


Average Luminance of White ( $Y_{L,AVE}$ )

$$Y_{L,AVE} = \frac{Y_{L4} + Y_{L5} + Y_{L7} + Y_{L9} + Y_{L10}}{5}$$




Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. 30 min after lighting the backlight. This should be measured in the center of screen.  
 LED current : 25.5mA  
 Environment condition :  $T_a = 25 \pm 2 \text{ }^\circ\text{C}$

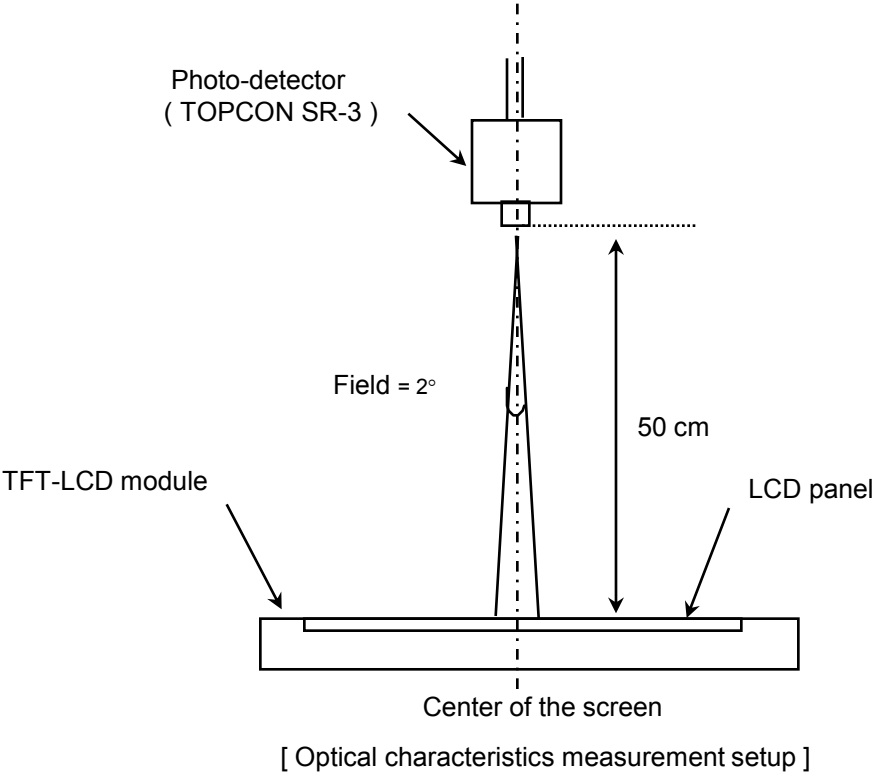

Note 6) Definition of 13 points white variation ( $\delta L$ ), CR variation( $C_{VER}$ ) [ ① ~ ⑬ ]

$$\delta L = \frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

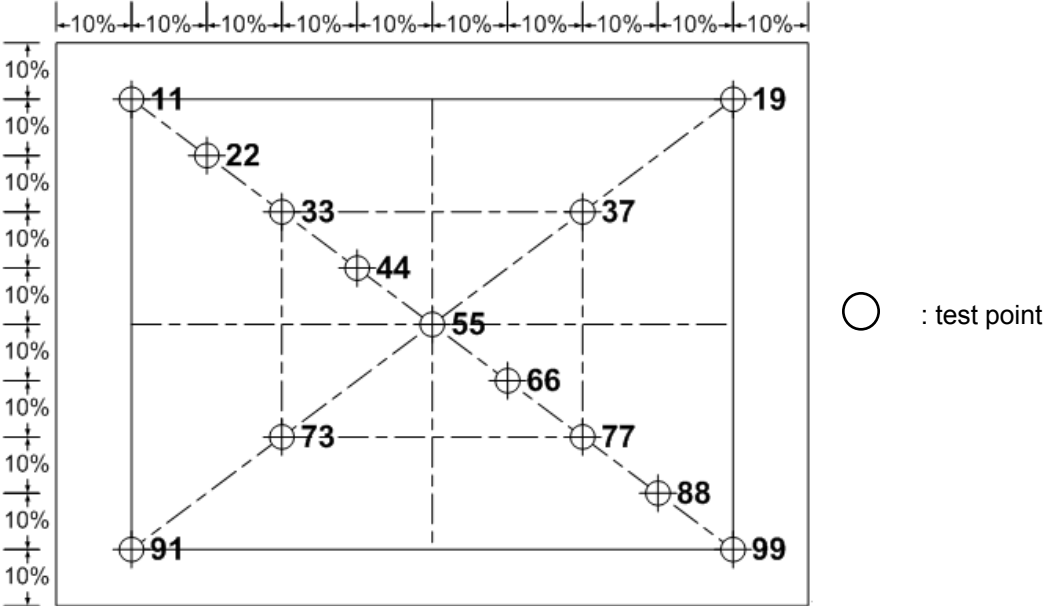

Samsung Confiden.....

### 3. ELECTRICAL CHARACTERISTICS

Approval

#### 3.1 TFT LCD MODULE

Ta= 25 ± 2°C


Item	Symbol	Min.	Typ.	Max.	Unit	Note	
Voltage of Power Supply	V <sub>DD</sub>	3.0	3.3	3.6	V		
Differential Input Voltage for LVDS Receiver Threshold	High	V <sub>IH</sub>	-	-	+100	mV	V <sub>CM</sub> = +1.2V
	Low	V <sub>IL</sub>	-100	-	-	mV	
Vsync Frequency	f <sub>v</sub>	-	60	-	Hz		
Hsync Frequency	f <sub>H</sub>	-	47.4	-	KHz		
Main Frequency	f <sub>DCLK</sub>	-	71	-	MHz		
Rush Current	I <sub>RUSH</sub>	-	-	1.5	A	(4)	
Current of Power Supply	White	I <sub>DD</sub>	-	250	-	mA	(2),(3)*a
	Mosaic		-	280	300	mA	(2),(3)*b
	V. stripe		-	320	-	mA	(2),(3)*c

Note (1) Display data pins and timing signal pins should be connected.( GND = 0V )


(2) f<sub>v</sub> = 60Hz, f<sub>DCLK</sub> = 71MHZ, V<sub>DD</sub> = 3.3V , DC Current.

(3) Power dissipation pattern

\*a) White Pattern


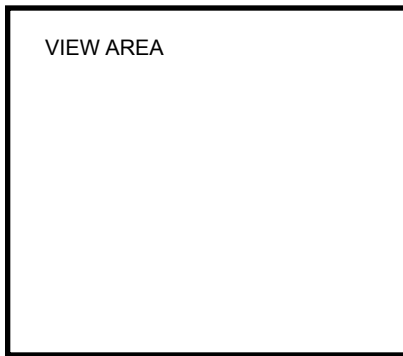


\*b) Mosaic Pattern

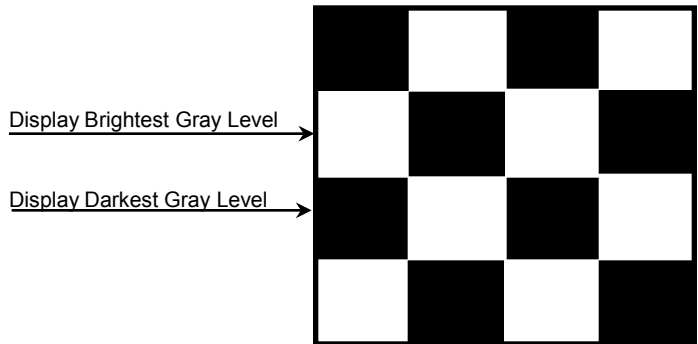


**Samsung Confidential**


\*c) 1dot Vertical stripe pattern

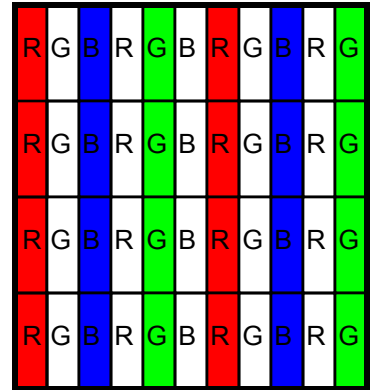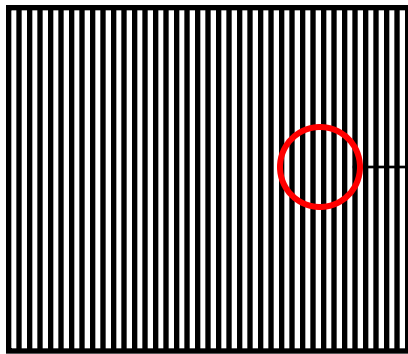

4) Rush current measurement condition

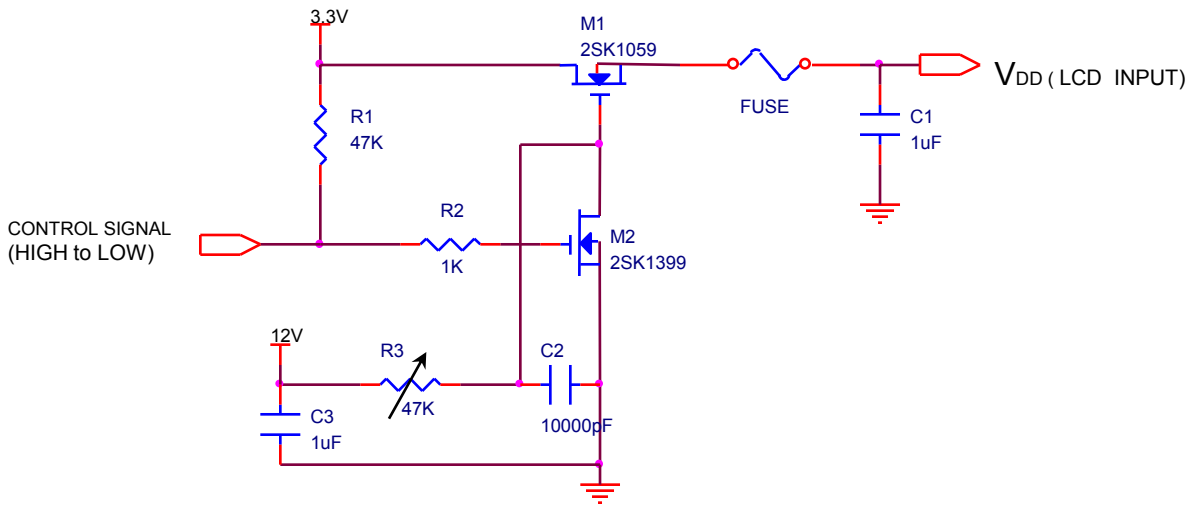

V<sub>DD</sub> rising time is 470us

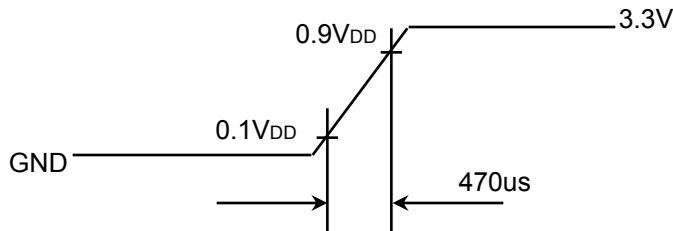

## 3.2 BACK-LIGHT UNIT

Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Forward Current	IF	-	25.5	-	mA	
LED Forward Voltage	VF	-	3.2	-	V	
LED Array Voltage	VP	-	19.2	-	V	VF X 6 LEDs
Power Consumption	P	-	1.96	2.5	W	IF X VF X 24 LEDs
Operating Life Time	Hr	15000	-	-	Hour	(1)

Note (1) Life time (Hr) of LEDs can be defined as the time in which it continues to operate under the condition Ta= 25 ± 2 °C and IF = 22.0 mArms until one of the following event occurs.

1. When the brightness becomes 50% or lower than the original.

## 3.3 LED Driver



Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Input Voltage	V <sub>in</sub>	6	12	20	V	
Enable Control Level	V	0	-	5	V	ON Level : 2V~3.3V OFF Level : 0V ~ 0.5V
PWM Control Level	V <sub>PWM</sub>	0		5	V	High Level : 1.5V~5.0V Low Level : 0V ~ 0.1V
PWM Control Duty Ratio	%	10	-	100	%	
Minimum on Time		-	100	-	ns	
Operating Frequency	Hz	0.2	-	1	KHz	


Note - Test Equipment : Fluke 45

## 4. BLOCK DIAGRAM


### 4.1 TFT LCD Module

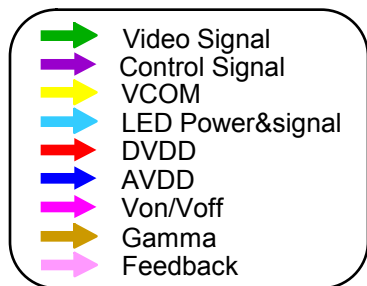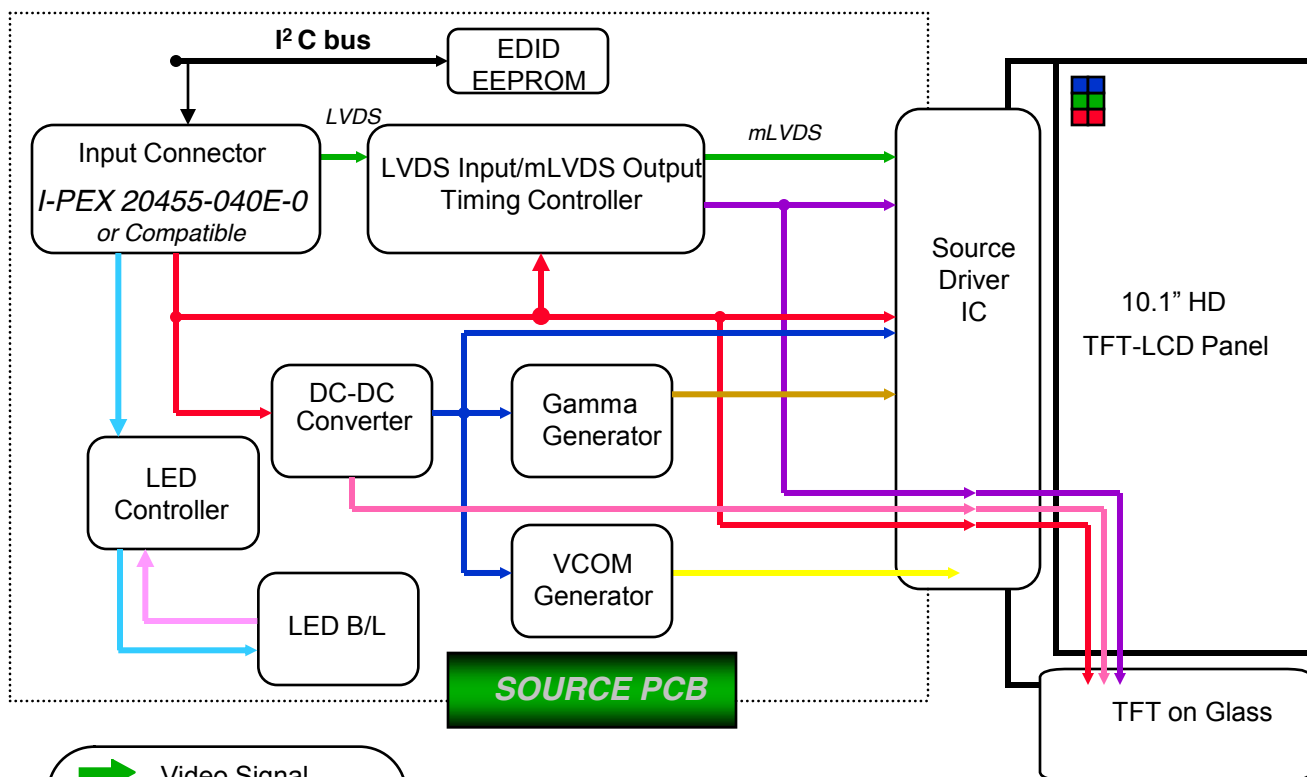

### 4.2 LED connection and placement

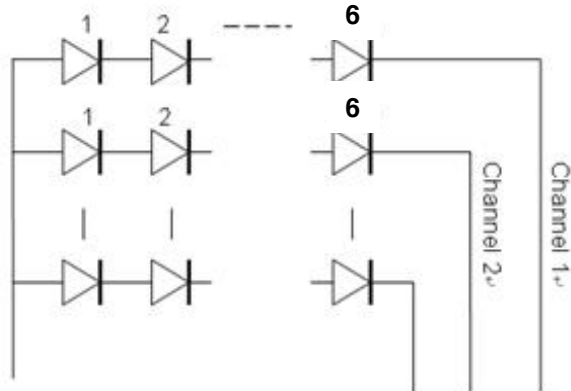

LED Wiring

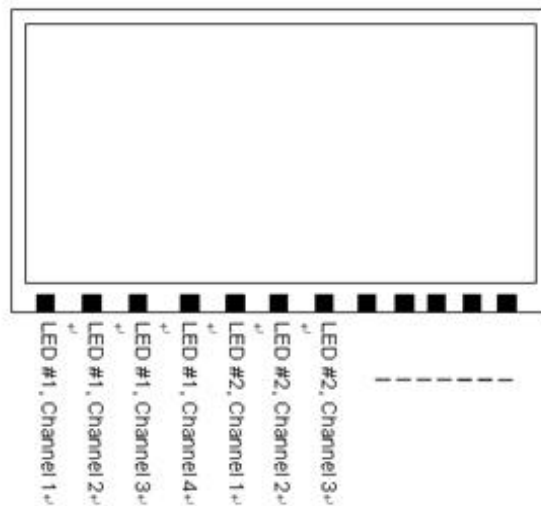

LED Placement

## 5. INPUT TERMINAL PIN ASSIGNMENT

Approval

### 5.1. Input Signal & Power (LVDS, Connector : I-PEX 20455-040E-## or equivalent )


No.	Symbol	Function	Polarity	Remarks
1	Diag loop	Diag pin for Dell testing.		
2	AVDD	Power Supply 3.3V (typical)		
3	AVDD	Power Supply 3.3V (typical)		
4	DVDD	DDC 3.3V power		
5	Test	Panel self test		
6	SCL	DDC Clock		
7	SDA	DDC Data		
8	RIN0-	LVDS differential data input (R0-R5, G0)	Negative	
9	RIN0+	LVDS differential data input (R0-R5, G0)	Positive	
10	GND	Ground		
11	RIN1-	LVDS differential data input (G1-G5, B0-B1)	Negative	
12	RIN1+	LVDS differential data input (G1-G5, B0-B1)	Positive	
13	GND	Ground		
14	RIN2-	LVDS differential data input (B2-B5, HS, VS, DE)	Negative	
15	RIN2+	LVDS differential data input (B2-B5, HS, VS, DE)	Positive	
16	GND	Ground		
17	CLK-	LVDS differential clock input	Negative	
18	CLK+	LVDS differential clock input	Positive	
19	GND	Ground		
20	NC	No Connection		
21	NC	No Connection		
22	GND	Ground		
23	NC	No Connection		
24	NC	No Connection		
25	GND	Ground		
26	NC	No Connection		
27	NC	No Connection		
28	GND	Ground		
29	NC	No Connection		
30	NC	No Connection		

**Samsung Confidential**

No.	Symbol	Function	Polarity	Remarks
31	VBL-	LED Ground		
32	VBL-	LED Ground		
33	VBL-	LED Ground		
34	Diag loop	Diag pin for Dell testing.		
35	BLIM	PWM for luminance control(200~1KHz, 3.3V, 10~100%, 0V=off) 5V tolerant		
36	BL_Enable	BL On/Off(On:2.0~3.3V, Off:0~0.5V) / NC(100K pull-up) / 5V tolerant		
37	NC	No Connection		
38	VBL+	LED Power Supply 6V ~ 20V		
39	VBL+	LED Power Supply 6V ~ 20V		
40	VBL+	LED Power Supply 6V ~ 20V		

## 5.2 LVDS Interface : Transmitter DS90CF363 or Compatible

Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
51	TxIN0	R0	14	TxIN14	G5
52	TxIN1	R1	15	TxIN15	B0
54	TxIN2	R2	19	TxIN18	B1
55	TxIN3	R3	20	TxIN19	B2
56	TxIN4	R4	22	TxIN20	B3
3	TxIN6	R5	23	TxIN21	B4
4	TxIN7	G0	24	TxIN22	B5
6	TxIN8	G1	27	TxIN24	Hsync
7	TxIN9	G2	28	TxIN25	Vsync
11	TxIN12	G3	30	TxIN26	DE
12	TxIN13	G4	31	TxCLKIN	Clock

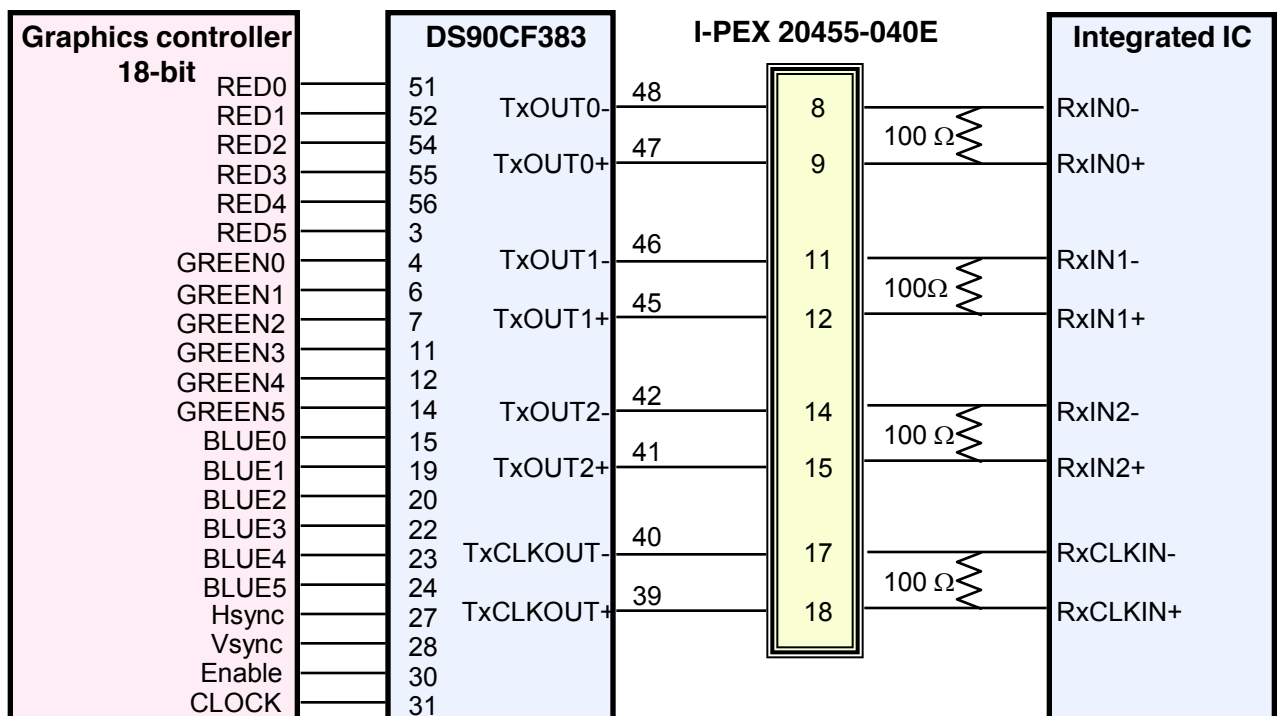**LVDS INTERFACE**


Note : The LCD Module uses a 100ohm resistor between positive and negative lines of each receiver input.

**Samsung Confidential**



### 5.3 Timing Diagrams of LVDS For Transmission

#### LVDS Receiver : Integrated T-CON

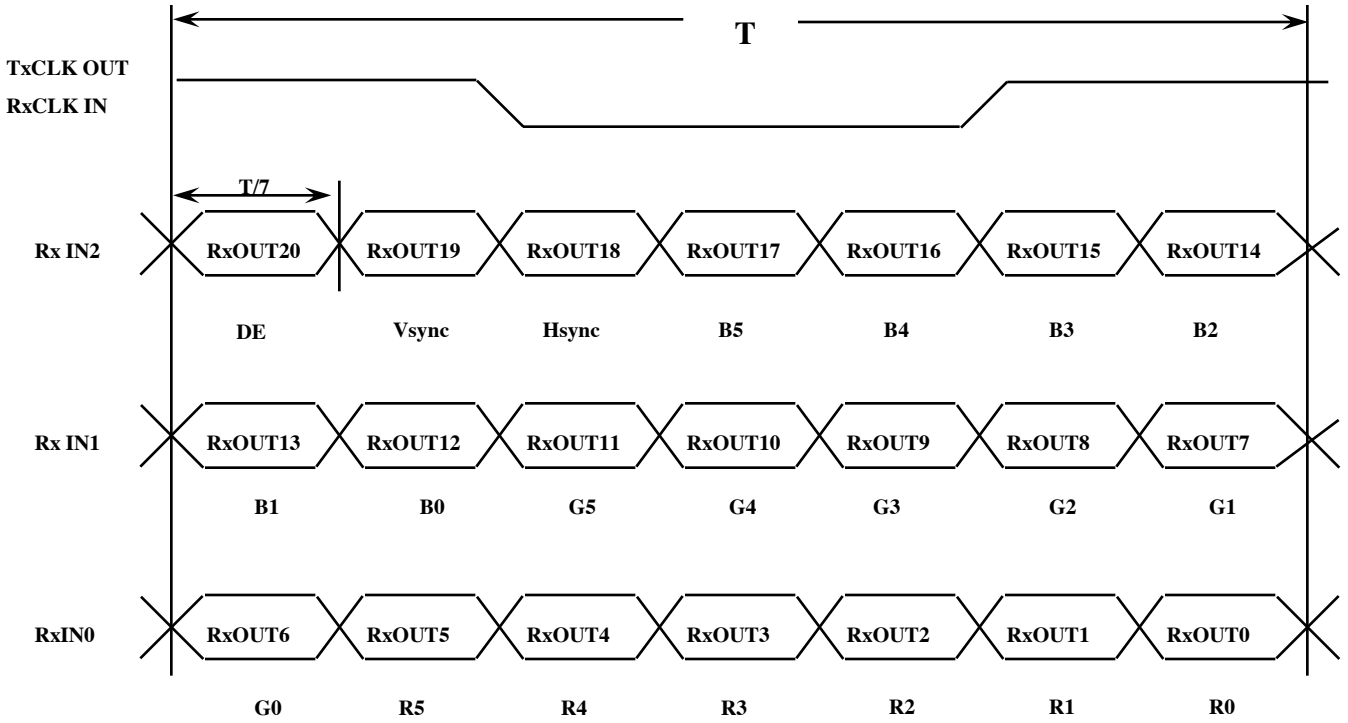

## 5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color

Color	Display	Data Signal																	Gray Scale Level	
		Red					Green					Blue								
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	45		B5
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	-
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	-
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	-
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	-
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1	-
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	-
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0	
	Dark	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1	
	↑	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R60	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	↓	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	R61	
	Light	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	R62	
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	R63	
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	Dark	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	G1	
	↑	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	G2	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G60	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	↓	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	G61	
	Light	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	G62	
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	G63	
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0	
	Dark	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	B1	
	↑	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	B2	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B60	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	↓	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	B61	
	Light	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	B62	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	B63	


Note 1) Definition of gray :

Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)

Note 2) Input signal: 0 =Low level voltage, 1=High level voltage

**Samsung Confidential**

5.5 Pixel Format in the display

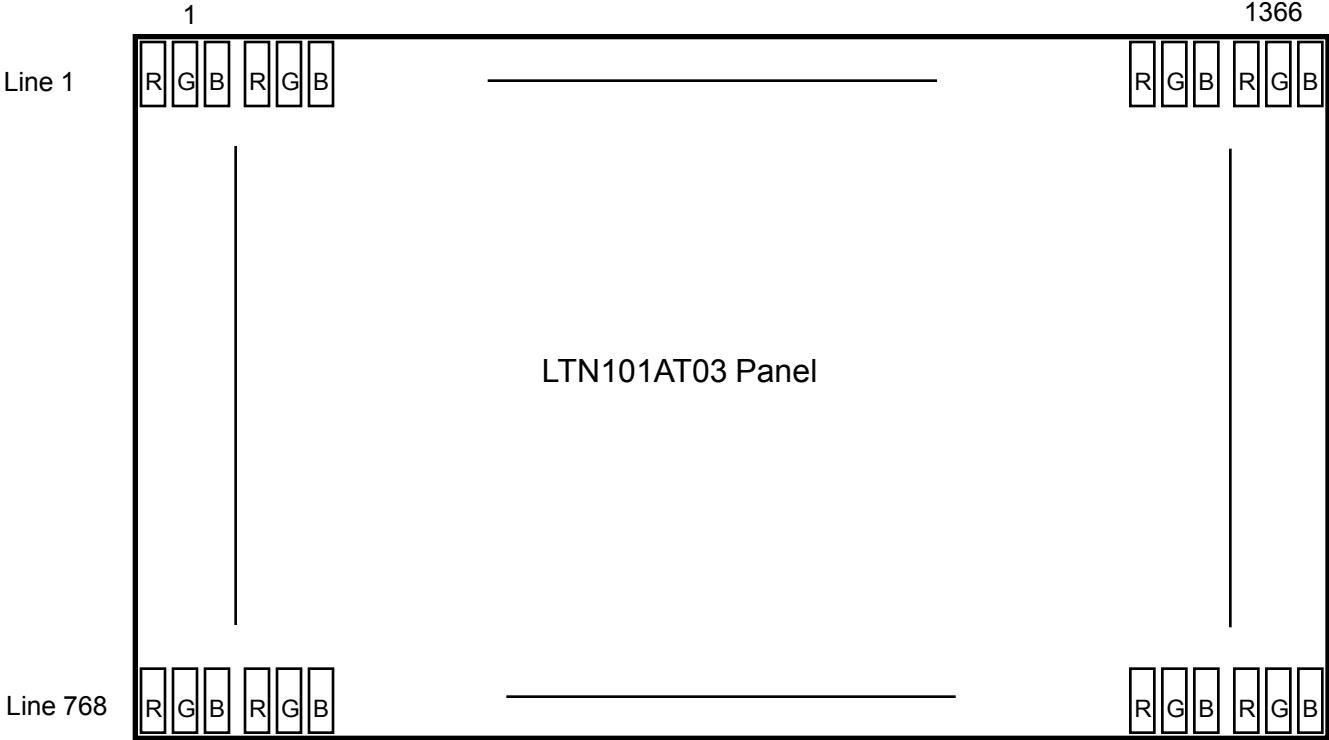


**Samsung Confidential**

## 6. INTERFACE TIMING

### 6.1 Timing Parameters


Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	TV	-	<b>780</b>	-	Lines	
Vertical Active Display Term	Display Period	TVD	-	768	-	Lines	
One Line Scanning Time	Cycle	TH	-	<b>1489</b>	-	Clocks	
Horizontal Active Display Term	Display Period	THD	-	1366	-	Clocks	

### 6.2 Timing diagrams of interface signal

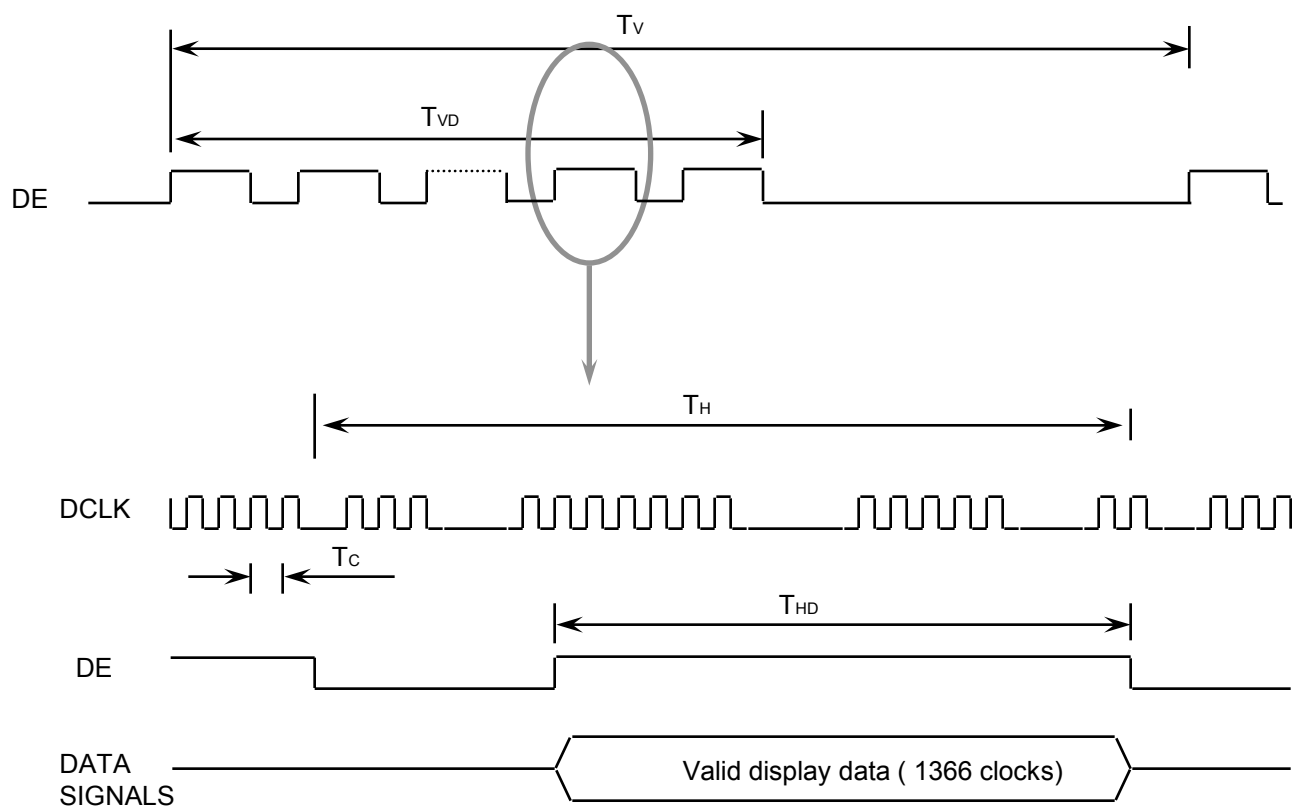

**Samsung Confidential**

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

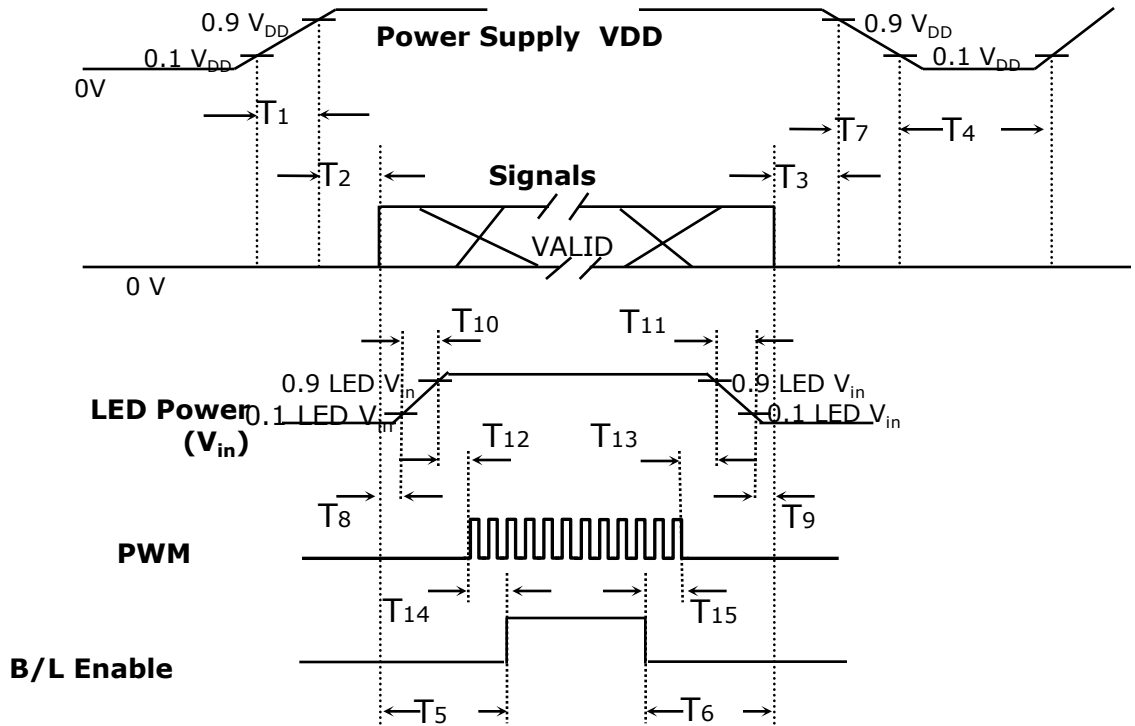

**Power Sequence & Timing Parameters**

Timing (ms)	Remarks
$0.5 < T_1 \leq 10$	V <sub>DD</sub> rising time from 10% to 90%
$0 < T_2 \leq 50$	Delay from V <sub>DD</sub> to valid data at power ON
$0 < T_3 \leq 50$	Delay from valid data OFF to V <sub>DD</sub> OFF at power Off
$500 \leq T_4$	V <sub>DD</sub> OFF time for Windows restart
$200 \leq T_5$	Delay from valid data to B/L enable at power ON
$200 \leq T_6$	Delay from valid data off to B/L disable at power Off
$0 < T_7 \leq 10$	V <sub>DD</sub> falling time from 90% to 10%
$10 < T_8$	Delay from valid data on to LED driver Vin rising time 10%
$10 < T_9$	Delay from LED driver Vin falling time 10% to valid data Off
$0.5 < T_{10} \leq 10$	LED V <sub>in</sub> rising time from 10% to 90%
$0.5 < T_{11} \leq 10$	LED V <sub>in</sub> falling time from 90% to 10%
$10 < T_{12}$	Delay from LED driver Vin rising time 90% to PWM ON
$10 < T_{13}$	Delay from PWM Off to LED driver Vin falling time 10%
$10 < T_{14}$	Delay from PWM ON to B/L Enable ON
$10 < T_{15}$	Delay from B/L Enable Off to PWM Off

## NOTE.

- (1) The supply voltage of the external system for the module input should be the same as the definition of  $V_{DD}$ .
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of  $V_{DD}$  = off level, please keep the level of input signals on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

## 7. Mechanical Outline Dimension

Approval

Refer to the next page

**Samsung Confidential**

**Doc.No.**


LTN101AT03-D

**Rev.No**


04-A00-G-110328

**Page**

23 / 32

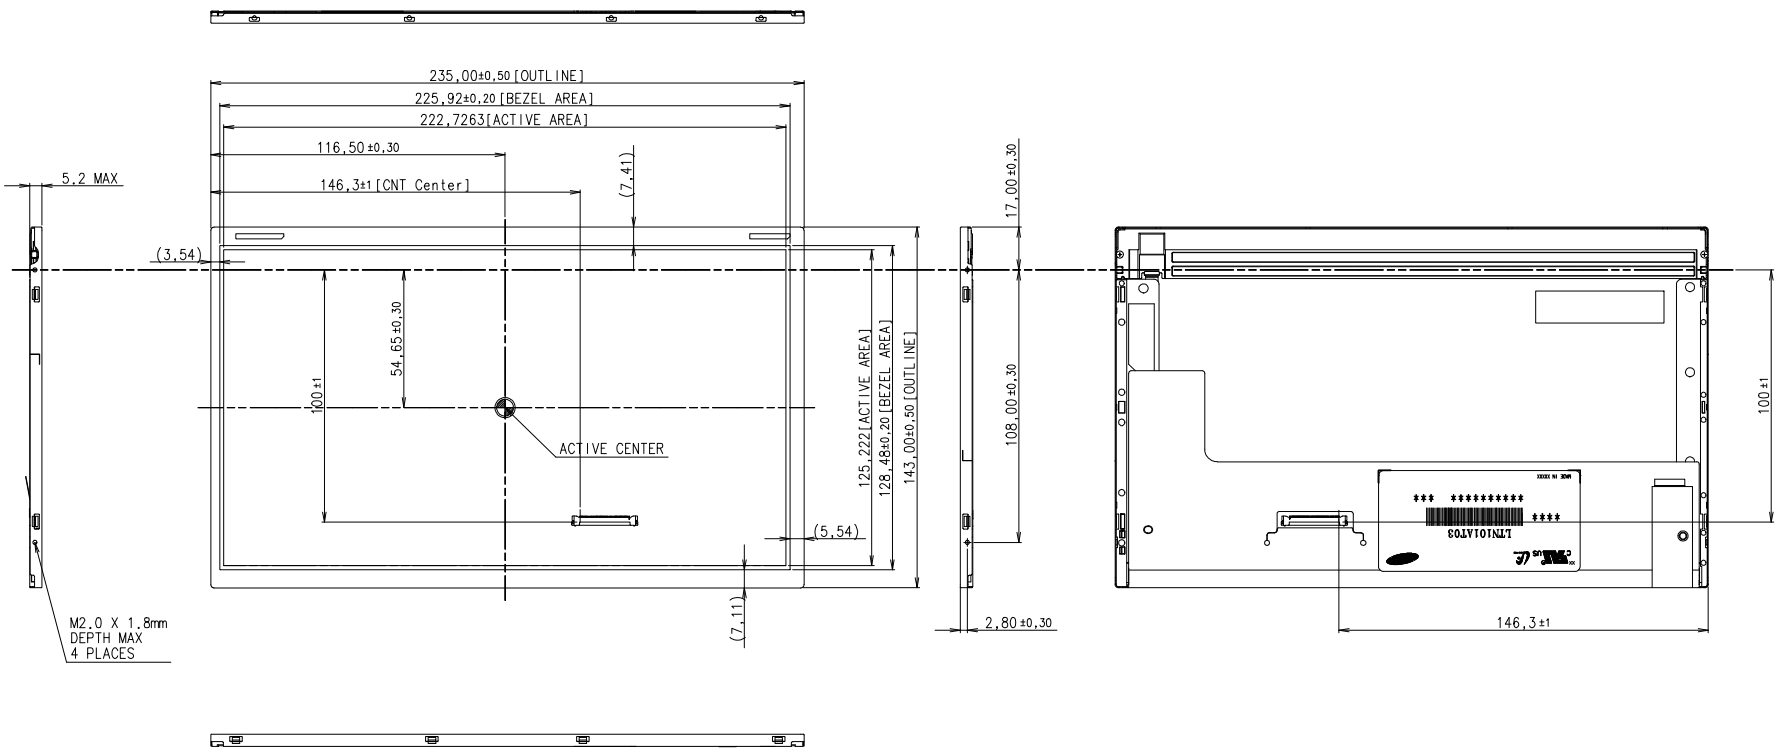

**LTN101AT03-D01**  
 Samsung Confidential

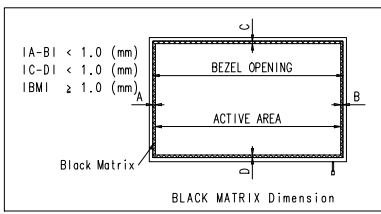

**\* NOTE**

1. SIGNAL INTERFACE CONNECTOR TO BE SPECIFIED AS BELOW.  
 - MAKER : I-PEX  
 - INPUT : I-PEX 20455-040E-0 or EQUIVALENT(LOCK TYPE)
2. ALLOWED DEPTH OF USERHOLE SCREW INSERTION IS 1.8mm MAX.
3. CALIFERS MEASURING FORCE : 750 gf
4. USER HOLE TORQUE SPEC : 2.5 kgfcm Max(5TIMES)
5. WEIGHT SPEC : 200g Max
6. IN ORDER TO AVOID IC DAMAGE, IT IS NOT ALLOW THAT OVERLAPPING OF CABLES OR ANTENNAS, CAMERA, WLAN, WWAN OVER THESE COF LACATIONS
7. GENERAL TOLERANCE IS 0.5mm

REV	DATE	DESCRIPTION OF REVISION	REASON	CHK'D BY
UN1	mm	DRA'N BY   DES'G BY   CHK'D BY   APP'D BY	MODEL NAME	LTN101AT03-D01
SCALE	1:1	E.W.SEO	C.Y.BANG	PART/SHEET
GENERAL TOLERANCE	±0.5	2010.05.10	SPEC. NO	OUTLINE DIMENSION SHEET 1/1
SAMSUNG ELECTRONICS			CODE NO.	VER. 000




## 8. PACKING

Approval

### 1. CARTON(Internal Package)

(1) Packing Form  
Styrofoam cushion box as shock absorber

(2) Packing Method

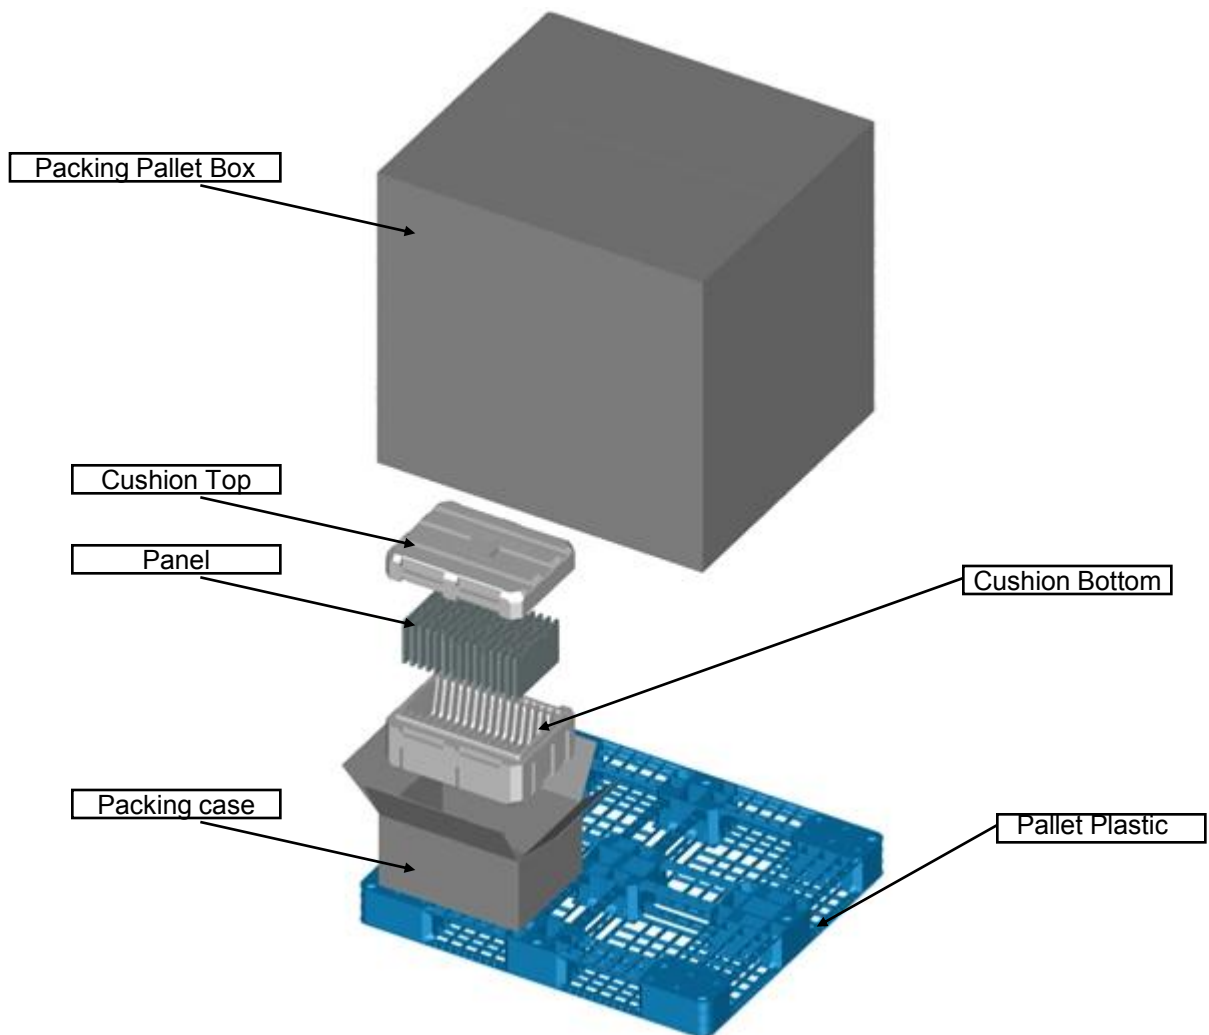

PACKING CASE

- Note 1) Total Weight : Approximately 7 kg  
2) Acceptance number of piling : 30 sets  
3) Carton size : 450(W) × 340(D) × 230(H)

**Samsung Confidential**

## (3)Packing Material

No	Part name	Quantity
1	Static electric protective sack	30
2	Packing case (Inner box)	1 set
3	Pictorial marking	2 Pcs
4	Silicagel ( 500 x 1 )	1
5	Carton	1 set


## 9. MARKINGS &amp; OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1)Parts number : LTN101AT03

(2)Revision code : 3 letters

(3)Lot number : X X X X XXX XX X **D01**

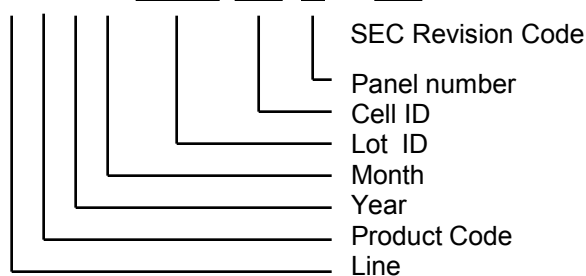

## (4) Nameplate Indication



Parts name : LTN1101AT03-D

Lot number : 6H8Jxxxxxx

Inspected work week : 1003

DP/N : Dell Part Number ("0GM84X" is for LTN101AT03-D)

**Samsung Confidential**

※ Panel revision code scheme

Build Name(s)	Revision Code(s)
SST (WS)	X00, X01, X02, ... X09
PT (ES)	X10, X11, X12, ... X19
ST (CS)	X20, X21, X23, ... X29
XB (MP)	A00, A01, A02, ... A99

(6) Packing box attach



**Samsung Confidential**

## 10. GENERAL PRECAUTIONS

Approval

### 1. Handling

- (a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static , it may cause damage to the C-MOS Gate Array IC.
- (i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Do not pull or fold the lamp wire.
- (l) Do not adjust the variable resistor which is located on the back side.
- (m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector shall not be touched directly with bare hands.

**Samsung Confidential**

## 2. STORAGE

- (a) Do not leave the module in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 5 to 40 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module under the direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during storage.
- (d) Storage period is recommended not to exceed 1 year.

## 3. OPERATION

- (a) Do not connect,disconnect the module in the “ Power On” condition.
- (b) Power supply should always be turned on/off by following item 6.3 “ Power on/off sequence “.
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

## 4. OTHERS

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. ( the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on) Otherwise the module may be damaged.
- (d) If the module displays the same pattern continuously for a long period of time,it can be the situation when the image “sticks” to the screen.
- (e) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

**Samsung Confidential**

	Byte	Field Name and Comments	Value	Value
	(hex)		(hex)	(binary)
Header	0	Header	00	00000000
	1	Header	FF	11111111
	2	Header	FF	11111111
	3	Header	FF	11111111
	4	Header	FF	11111111
	5	Header	FF	11111111
	6	Header	FF	11111111
	7	Header	00	00000000
Vendor / Product EDID Version	8	EISA manufacture code = 3 Character ID	4C	01001100
	9	EISA manufacture code (Compressed ASCII)	A3	10100011
	0A	Panel Supplier Reserved – Product Code	41	01000001
	0B	Panel Supplier Reserved – Product Code	54	01010100
	0C	LCD module Serial No - Preferred but Optional (“0” if not used)	00	00000000
	0D	LCD module Serial No - Preferred but Optional (“0” if not used)	00	00000000
	0E	LCD module Serial No - Preferred but Optional (“0” if not used)	00	00000000
	0F	LCD module Serial No - Preferred but Optional (“0” if not used)	00	00000000
	10	Week of manufacture	00	00000000
	11	Year of manufacture	14	00010100
	12	EDID structure version # = 1	01	00000001
	13	EDID revision # = 3	03	00000011
	Display Parameters	14	Video I/P definition = Digital I/P	90
15		Max H image size = (Rounded to cm)	16	00010110
16		Max V image size = (Rounded to cm)	0D	00001101
17		Display gamma = (gamma × 100) - 100 = Example: ( 2.2 × 100 ) – 100 = 120	78	01111000
18		Feature support ( no DPMS, Active off, RGB, timing BLK 1)	0A	00001010
Panel Color Coordinates	19	Red/Green Low bit (RxRy/GxGy)	85	10000101
	1A	Blue/White Low bit (BxBy/WxWy)	95	10010101
	1B	Red X Rx = 0.xxx	99	10011001
	1C	Red Y Ry = 0.xxx	57	01010111
	1D	Green X Gx = 0.xxx	4F	01001111
	1E	Green Y Gy = 0.xxx	8F	10001111
	1F	Blue X Bx = 0.xxx	26	00100110
	20	Blue Y By = 0.xxx	21	00100001
	21	White X Wx = 0.xxx	50	01010000
	22	White Y Wy = 0.xxx	54	01010100
Established Timings	23	Established timings 1 (00h if not used)	00	00000000
	24	Established timings 2 (00h if not used)	00	00000000
	25	Manufacturer’s timings (00h if not used)	00	00000000
Standard Timing ID	26	Standard timing ID1 (01h if not used)	01	00000001
	27	Standard timing ID1 (01h if not used)	01	00000001
	28	Standard timing ID2 (01h if not used)	01	00000001
	29	Standard timing ID2 (01h if not used)	01	00000001
	2A	Standard timing ID3 (01h if not used)	01	00000001
	2B	Standard timing ID3 (01h if not used)	01	00000001
	2C	Standard timing ID4 (01h if not used)	01	00000001
	2D	Standard timing ID4 (01h if not used)	01	00000001
	2E	Standard timing ID5 (01h if not used)	01	00000001
	2F	Standard timing ID5 (01h if not used)	01	00000001
	30	Standard timing ID6 (01h if not used)	01	00000001
	31	Standard timing ID6 (01h if not used)	01	00000001
	32	Standard timing ID7 (01h if not used)	01	00000001
	33	Standard timing ID7 (01h if not used)	01	00000001
	34	Standard timing ID8 (01h if not used)	01	00000001
35	Standard timing ID8 (01h if not used)	01	00000001	

Samsung Confidential

Timing Descriptor #1	36	Pixel Clock/10,000 (LSB)	BC	10111100
	37	Pixel Clock/10,000 (MSB)	1B	00011011
	38	Horizontal Active = xxx pixels (lower 8 bits)	56	01010110
	39	Horizontal Blanking (Thbp) = xxx pixels (lower 8 bits)	84	10000100
	3A	Horizontal Active/Horizontal blanking (Thbp) (upper4:4 bits)	50	01010000
	3B	Vertical Active = xxx lines	00	00000000
	3C	Vertical Blanking (Tvbp) = xxx lines (DE Blanking typ. for DE only panels)	16	00010110
	3D	Vertical Active : Vertical Blanking (Tvbp) (upper4:4 bits)	30	00110000
	3E	Horizontal Sync, Offset (Thfp) = xxx pixels	30	00110000
	3F	Horizontal Sync, Pulse Width = xxx pixels	20	00100000
	40	Vertical Sync, Offset (Tvfp) = xx lines Sync Width = xx lines	55	01010101
	41	Horizontal Vertical Sync Offset/Width upper 2 bits	00	00000000
	42	Horizontal Image Size =xxx mm	DF	11011111
	43	Vertical image Size = xxx mm	7D	01111101
	44	Horizontal Image Size / Vertical image size	00	00000000
	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
47	Bit[7] 0: Non-interlace, 1: Interlace Bit[6:5] 00: Normal display, no strero, XX: See table xx for definition Bit[4:3] 00: Analog composite, 01: Bipolar analog composite, 10: Digital composite, 11: Digital separate Bit[2:1] :The interpretation of bits 2 and 1 is dependent on the decode of bits 4 and 3 - see Table 3.18. Bit[0] :See Table VESA EDID spec for definition  Referenced Default = 1Ah	1A	00011010	
Timing Descriptor #2	48	Pixel Clock/10,000 (LSB)	BC	10111100
	49	Pixel Clock/10,000 (MSB)	1B	00011011
	4A	Horizontal Active = xxx pixels (lower 8 bits)	56	01010110
	4B	Horizontal Blanking (Thbp) = xxx pixels (lower 8 bits)	84	10000100
	4C	Horizontal Active/Horizontal blanking (Thbp) (upper4:4 bits)	50	01010000
	4D	Vertical Active = xxx lines	00	00000000
	4E	Vertical Blanking (Tvbp) = xxx lines (DE Blanking typ. for DE only panels)	16	00010110
	4F	Vertical Active : Vertical Blanking (Tvbp) (upper4:4 bits)	30	00110000
	50	Horizontal Sync, Offset (Thfp) = xxx pixels	30	00110000
	51	Horizontal Sync, Pulse Width = xxx pixels	20	00100000
	52	Vertical Sync, Offset (Tvfp) = xx lines Sync Width = xx lines	55	01010101
	53	Horizontal Vertical Sync Offset/Width upper 2 bits	00	00000000
	54	Horizontal Image Size =xxx mm	DF	11011111
	55	Vertical image Size = xxx mm	7D	01111101
	56	Horizontal Image Size / Vertical image size	00	00000000
	57	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	58	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
59	Bit[7] 0: Non-interlace, 1: Interlace Bit[6:5] 00: Normal display, no strero, XX: See table xx for definition Bit[4:3] 00: Analog composite, 01: Bipolar analog composite, 10: Digital composite, 11: Digital separate Bit[2:1] :The interpretation of bits 2 and 1 is dependent on the decode of bits 4 and 3 - see Table 3.18. Bit[0] :See Table VESA EDID spec for definition  Referenced Default = 1Ah	1A	00011010	

Timing Descriptor #3 Dell specific information	5A	Flag	00	00000000
	5B	Flag	00	00000000
	5C	Flag	00	00000000
	5D	Data Type Tag: Alphanumeric Data String (ASCII)	FE	11111110
	5E	Flag	00	00000000
	5F	Dell P/N 1 <sup>st</sup> Character	47	01000111
	60	Dell P/N 2 <sup>nd</sup> Character	4D	01001101
	61	Dell P/N 3 <sup>rd</sup> Character	38	00111000
	62	Dell P/N 4 <sup>th</sup> Character	34	00110100
	63	Dell P/N 5 <sup>th</sup> Character	58	01011000
	64	LCD Supplier EEDID Revision # Bit[7] : 0=X, 1=A Bit[6:0] : 00, 01, 02... for SST 10, 11, 12... for PT 20, 21, 22... for ST 00, 01, 02... for X-Build (if Bit[7]=1)	80	10000000
	65	Manufacturer P/N	31	00110001
	66	Manufacturer P/N	30	00110000
	67	Manufacturer P/N	31	00110001
	68	Manufacturer P/N	41	01000001
	69	Manufacturer P/N	54	01010100
6A	Manufacturer P/N	0A	00001010	
6B	Manufacturer P/N (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)	20	00100000	
Timing Descriptor #4	6C	Flag	00	00000000
	6D	Flag	00	00000000
	6E	Flag	00	00000000
	6F	Data Type Tag: Manufacturer Specified Data 00	00	00000000
	70	Flag	00	00000000
	71	SMBUS Value = XX nits	0C	00001100
	72	SMBUS Value = XX nits	10	00010000
	73	SMBUS Value = XX nits	17	00010111
	74	SMBUS Value = XX nits	1B	00011011
	75	SMBUS Value = XX nits	36	00110110
	76	SMBUS Value = XXX nits	69	01101001
	77	SMBUS Value = XXX nits	A9	10101001
	78	SMBUS Value = max nits (Typically = 00h, XXX nits)	FF	11111111
	79	Bit[7:3] Reserved Bit[2] 0: No RTC support, 1: RTC support Bit[1:0] 00: reserved, 01: single LVDS, 10: dual LVDS, 11: reserved  01h single channel LVDS, no RTC support 02h single channel LVDS, with RTC support 05h dual channel LVDS, no RTC support 06h dual channel LVDS, with RTC support	01	00000001
7A	BIST Enable: Yes = '01' No = '00'	01	00000001	
7B	(If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)	0A	00001010	
7C	(If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)	20	00100000	
7D	(If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)	20	00100000	
Checksum	7E	Extension flag (# of optional 128 EDID extension blocks to follow, Typ = 0)	00	00000000
	7F	Checksum (The 1-byte sum of all 128 bytes in this EDID block shall = 0)	86	10000110