



ELECTRONICS

Product Information



# Product Information

**SAMSUNG TFT-LCD**  
**MODEL NO. : LTN121XJ-L06**

www.DataSheet4U.com

LCD Product Planning Group 1, Marketing Team

Samsung Electronics Co . , LTD.



Doc.No.	LTN121XJ-L06	ISSUED DATE	03/Mar/2006	Page	1 / 13
---------	--------------	-------------	-------------	------	--------

## CONTENTS

General Description	----- ( 4 )
1. Electrical Absolute Ratings	----- ( 4 )
2. Optical Characteristics	----- ( 5 )
3. Electrical Characteristics	----- ( 6 )
3.1 TFT LCD Module	
3.2 Backlight Unit	
4. Block Diagram	----- ( 7 )
4.1 TFT LCD Module	
4.2 Backlight Unit	
5. Input Terminal Pin Assignment	----- ( 8 )
5.1 Input Signal & Power	
5.2 Backlight Unit	
5.3 Timing Diagrams of LVDS For Transmitting	
6. Interface Timing	----- ( 10 )
6.1 Timing Parameters	
6.2 Timing Diagrams of interface Signal	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	----- ( 12 )

www.DataSheet4U.com

## GENERAL DESCRIPTION

### DESCRIPTION

LTN121XJ-L06 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight system. The resolution of a 12.1" contains 1024 x 768 pixels and can display up to 262,144 colors. 6 O'clock direction is the Optimum viewing angle.

### FEATURES

- Ultra Thin and light weight
- High contrast ratio
- XGA (1024x768 pixels) resolution
- Low power consumption
- DE (Data enable) only mode.
- 3.3V LVDS Interface
- On board EDID chip
- PB-Free Product (RoHS compliant)

### APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application but for others, please contact SEC

## GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	245.76(H) X 184.32(V) (12.1"diagonal)	mm	
Driver element	a-si TFT active matrix		
Display colors	262,144		
Number of pixel	1024 x 768 (XGA )	pixel	
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.240(H) x 0.240(V)	mm	
Display Mode	Normally white		
Surface treatment	Haze 25, Hard-Coating 3H		

**MECHANICAL INFORMATION**

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	260.5	261.0	261.5	mm	
	Vertical (V)	197.5	198.0	198.5	mm	
	Depth (D)	-	4.7	5.0	mm	(1)
Weight		-	290	300	g	

Note (1) Measurement condition of outline dimension

- . Equipment : Vernier Calipers
- . Push Force : 500g f (minimum)

**1. ELECTRICAL ABSOLUTE RATINGS****(1) TFT LCD MODULE**

$$V_{DD} = 3.3V, V_{SS} = GND = 0V$$

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	$V_{DD}$	$V_{SS} - 0.3$	$V_{DD} + 0.3$	V	(1)
Logic Input Voltage	$V_{IN}$	$V_{SS} - 0.3$	$V_{DD} + 0.3$	V	(1)

Note (1) Within  $T_a$  ( $25 \pm 2 \text{ }^\circ\text{C}$ )

**(2) BACK-LIGHT UNIT**

$$T_a = 25 \pm 2 \text{ }^\circ\text{C}$$

Item	Symbol	Min.	Max.	Unit	Note
Lamp Current	$I_L$	3.0	7.0	mArms	(1)
Lamp frequency	$F_L$	50	80	kHz	(1)

Note 1) Permanent damage to the device may occur if maximum values are exceeded

Functional operation should be restricted to the conditions described under normal operating conditions.

## Product Information

## 2. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state.

Measuring equipment : TOPCON BM-5A and PR-650

\* Ta = 25 ± 2 °C, VDD=3.3V, fv= 60Hz, fDCLK = 65MHz, IL = 6.0 mA

Item	Symbol	Condition	Min.	Typ.	Max	Unit	
Contrast Ratio (5 Points)	CR		250	300	-	-	
Response Time at Ta	Rising	TR	-	10	20	msec	
	Falling	TT	-	30	50		
Average Luminance of White (5 Points)	YL,AVE		170	200	-	cd/m <sup>2</sup>	
Color Chromaticity (CIE)	Red	Rx	Normal Viewing Angle φ = 0 θ = 0	0.565	0.596	0.625	-
		Ry		0.310	0.340	0.370	
	Green	Gx		0.285	0.315	0.345	
		Gy		0.505	0.535	0.565	
	Blue	Bx		0.125	0.155	0.185	
		By		0.110	0.140	0.170	
	White	Wx		0.283	0.313	0.343	
		Wy		0.299	0.329	0.359	
Viewing Angle	Hor.	θL	CR ≥ 10	40	45	Degrees	
		θH		40	45		
	Ver.	φH		10	15		
		φL		25	30		
13 Points White Variation	δL		-	-	2.2	-	

www.DataSheet4U.com

### 3. ELECTRICAL CHARACTERISTICS

#### 3.1 TFT LCD MODULE

Ta= 25 ± 2°C

Item	Symbol	Min.	Typ.	Max.	Unit	Note	
Voltage of Power Supply	V <sub>DD</sub>	3.0	3.3	3.6	V		
Differential Input Voltage for LVDS Receiver Threshold	High	V <sub>IH</sub>	-	-	+100	mV	V <sub>CM</sub> = +1.2V
	Low	V <sub>IL</sub>	-100	-	-	mV	
Vsync Frequency	f <sub>v</sub>	-	60	-	Hz		
Hsync Frequency	f <sub>H</sub>	-	48.2	-	KHz		
Main Frequency	f <sub>DCLK</sub>	-	65	-	MHz		
Rush Current	I <sub>RUSH</sub>	-	-	1.5	A		
Current of Power Supply	White	I <sub>DD</sub>	-	270	-	mA	
	Mosaic		-	300	-	mA	
	V. Stripe		-	350	400	mA	

#### 3.2 BACK-LIGHT UNIT

The backlight system is an edge-lighting type with a single CCFT ( Cold Cathode Fluorescent Tube ).  
The characteristics of a single lamp are shown in the following table.


- INVERTER : SEM SIC 130T

Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp Current	I <sub>L</sub>	3.0	6.0	6.5	mArms	
Lamp Voltage	V <sub>L</sub>		565	-	Vrms	I <sub>L</sub> =6.0mA
Frequency	f <sub>L</sub>	50	60	65	KHz	
Power Consumption	P <sub>L</sub>		3.4		W	I <sub>L</sub> =6.0mA
Operating Life Time	Hr	10,000			Hour	
Startup Voltage	V <sub>s</sub>	-	-	1080	Vrms	25°C
				1300	Vrms	0°C
Lamp startup time		-	-	1.0	sec	


## 4. BLOCK DIAGRAM

### 4.1 TFT LCD Module

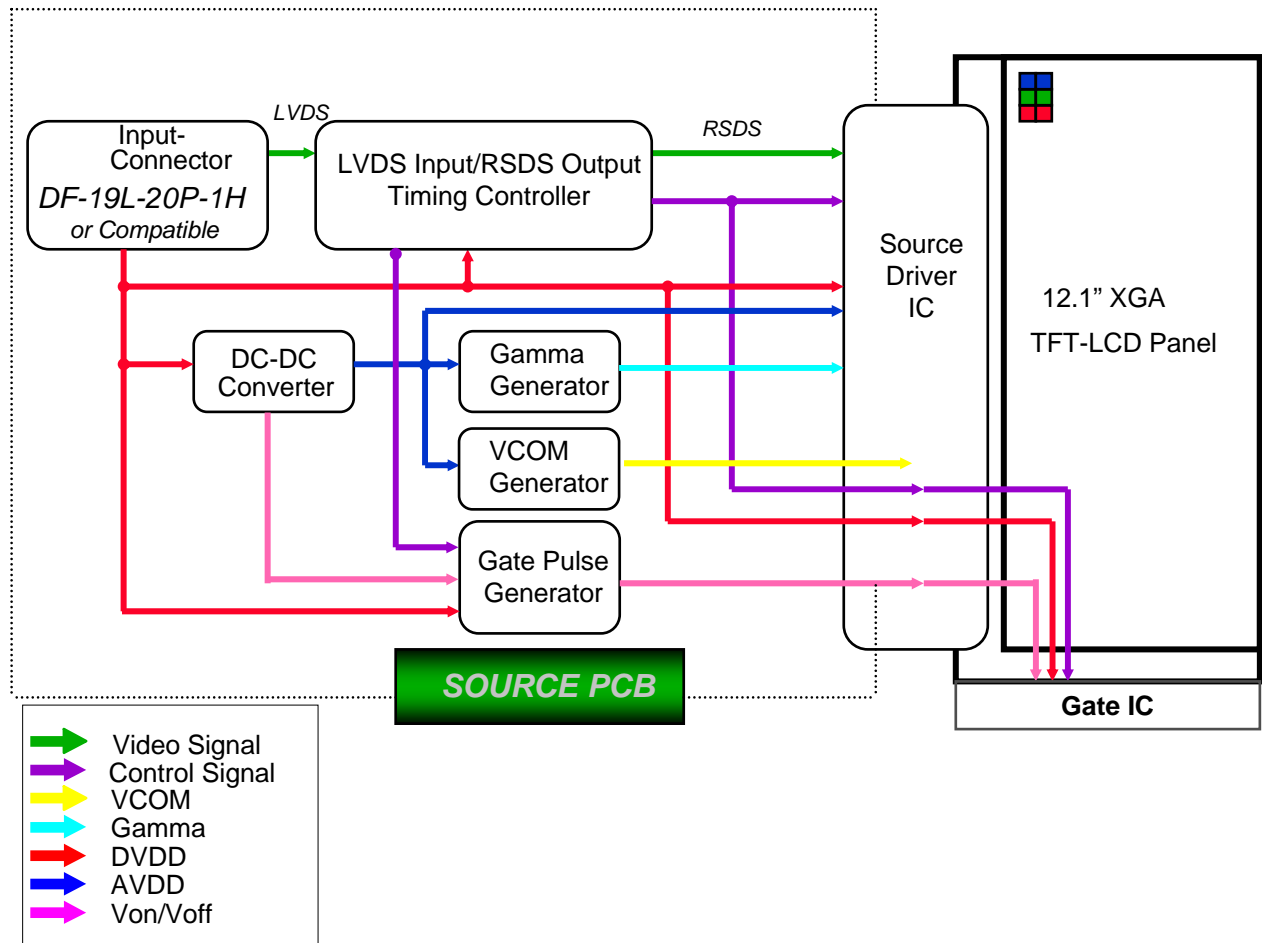

### 4.2 BACK-LIGHT UNIT

www.DataSheet4U.com

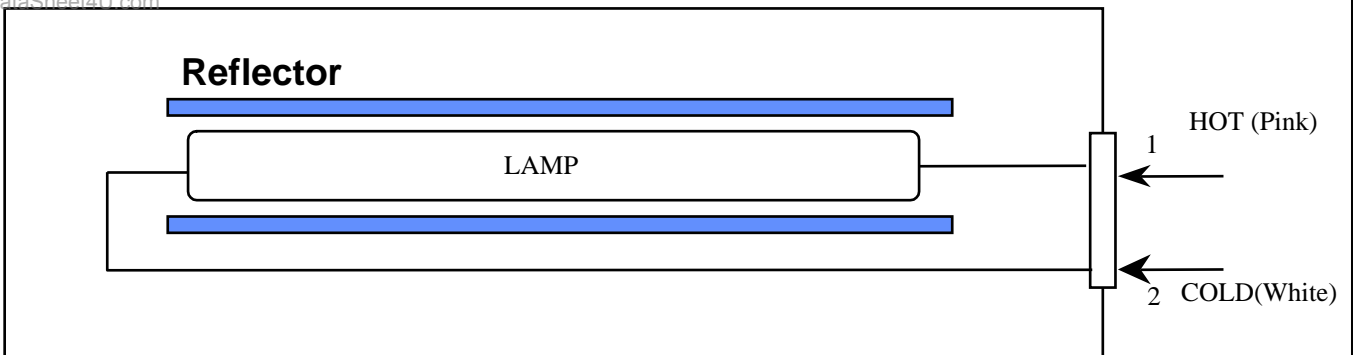

Note) The output of the inverter may change according to the material of the reflector.

## 5. INPUT TERMINAL PIN ASSIGNMENT

### 5.1. Input Signal & Power LVDS, Connector : (Hirose, DF-19L-20P-1H or Compatible)

PIN NO	SYMBOL	FUNCTION	POLARITY	REMARK
1	VSS	Ground		
2	VDD	POWER SUPPLY +3.3V		
3	VDD	POWER SUPPLY +3.3V		
4	VEDID	DCC 3.3V Power		
5	NC	No connection		
6	CLOCKEDID	DDC Clock		
7	DATAEDID	DDC Data		
8	RxIN0-	LVDS Differential Data INPUT(R0-R5, G0)	Negative	
9	RxIN0+	LVDS Differential Data INPUT(R0-R5, G0)	Positive	
10	VSS	Ground		
11	RxIN1-	LVDS Differential Data INPUT(G1-G5, B0-B1)	Negative	
12	RxIN1+	LVDS Differential Data INPUT(G1-G5, B0-B1)	Positive	
13	VSS	Ground		
14	RxIN2-	LVDS Differential Data INPUT(B2-B5, Sync, DE)	Negative	
15	RxIN3+	LVDS Differential Data INPUT(B2-B5, Sync, DE)	Positive	
16	VSS	Ground		
17	RxCLK-	LVDS Differential Clock INPUT(Clock)	Negative	
18	RxCLK+	LVDS Differential Clock INPUT(Clock)	Positive	
19	VSS	Ground		
20	VSS	Ground		



Product Information


5.2 BACK LIGHT UNIT

Connector : JST BHSR - 02VS -1  
 Mating Connector : SM02B-BHSS-1(JST)

Pin NO.	Symbol	Color	Function
1	HOT	Pink	High Voltage
2	COLD	White	Low Voltage

5.3 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-CON

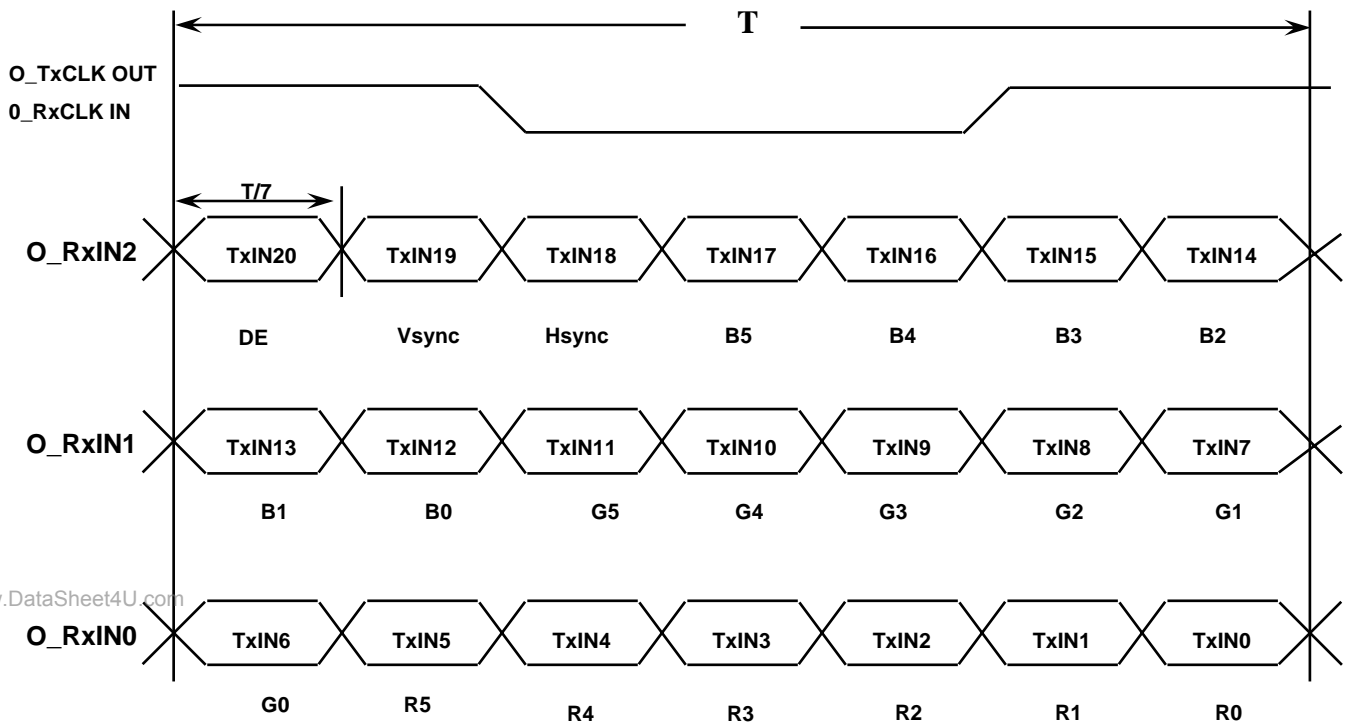


www.DataSheet4U.com

## 6. INTERFACE TIMING

### 6.1 Timing Parameters


Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	$T_V$	-	806	-	Lines	-
Vertical Active Display Term	Display Period	$T_{VD}$	-	768	-	Lines	-
One Line Scanning Time	Cycle	$T_H$	-	1344	-	Clocks	-
Horizontal Active Display Term	Display Period	$T_{HD}$	-	1024	-	Clocks	-

### 6.2 Timing diagrams of interface signal

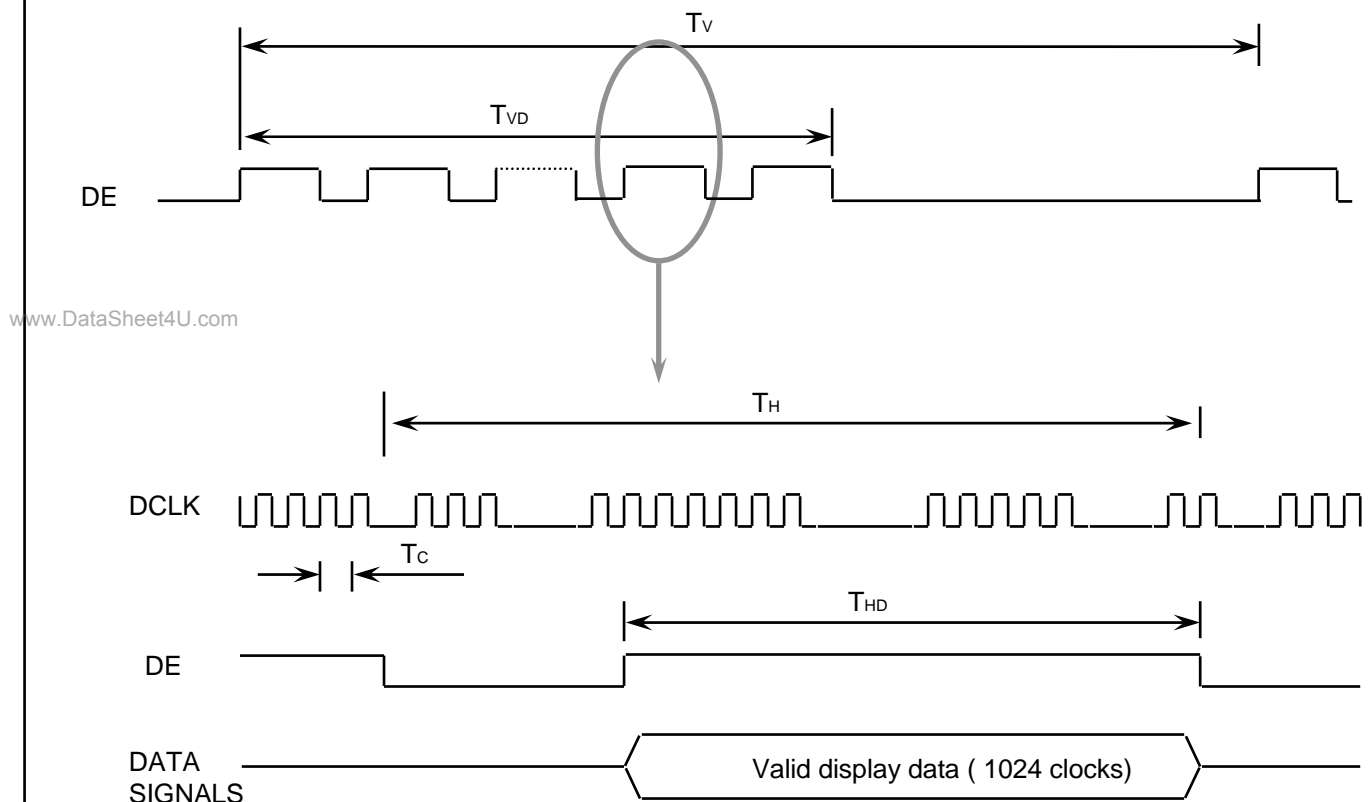

### 6.3 Power ON/OFF Sequence

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

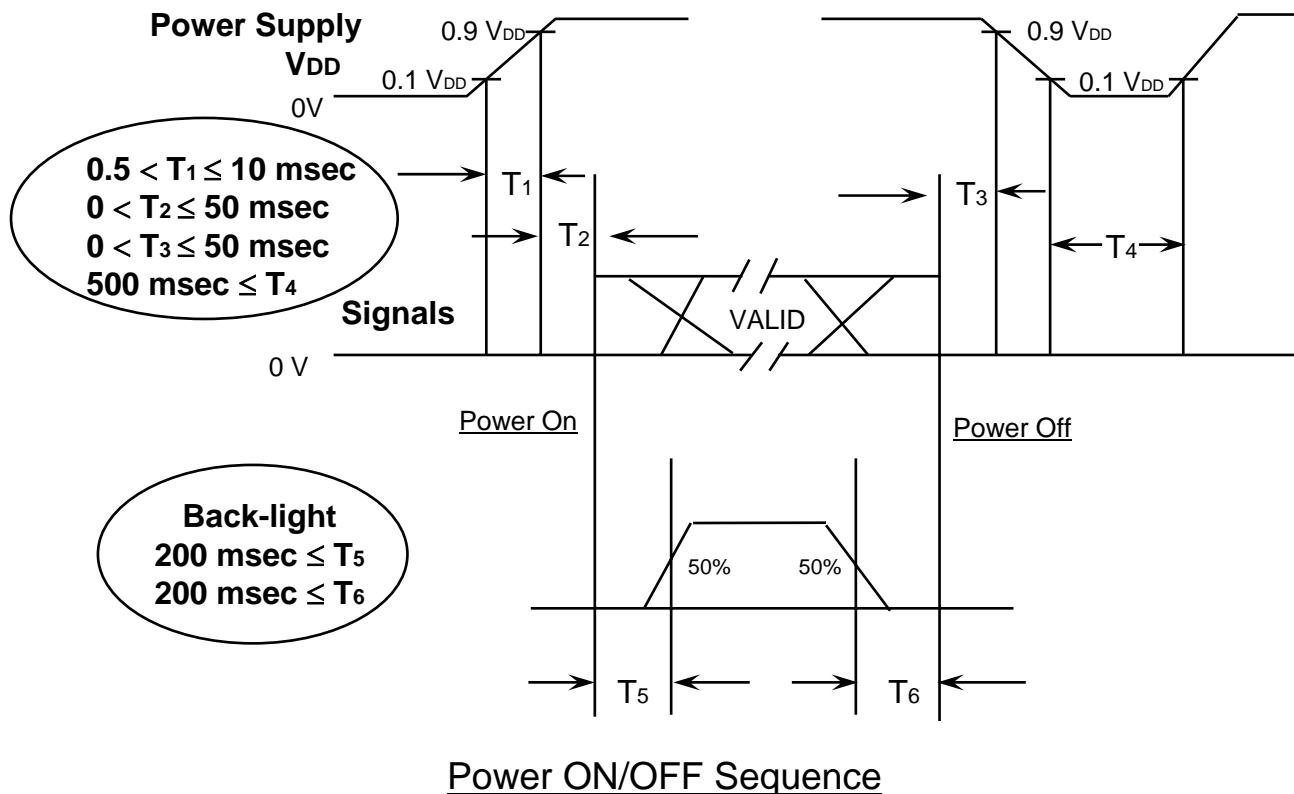

- T1 : Vdd rising time from 10% to 90%  
 T2 : The time from Vdd to valid data at power ON.  
 T3 : The time from valid data off to Vdd off at power Off.  
 T4 : Vdd off time for Windows restart  
 T5 : The time from valid data to B/L enable at power ON.  
 T6 : The time from valid data off to B/L disable at power Off.

#### NOTE.


- (1) The supply voltage of the external system for the module input should be the same as the definition of VDD.
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of VDD = off level, please keep the level of input signals on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

## 7. MECHANICAL OUTLINE DIMENSION

Product Information

[ Refer to the next page ]

<b>Doc.No.</b>	LTN121XJ-L06	<b>ISSUED DATE</b>	03/Mar/2006	<b>Page</b>	12 / 13
----------------	--------------	--------------------	-------------	-------------	---------

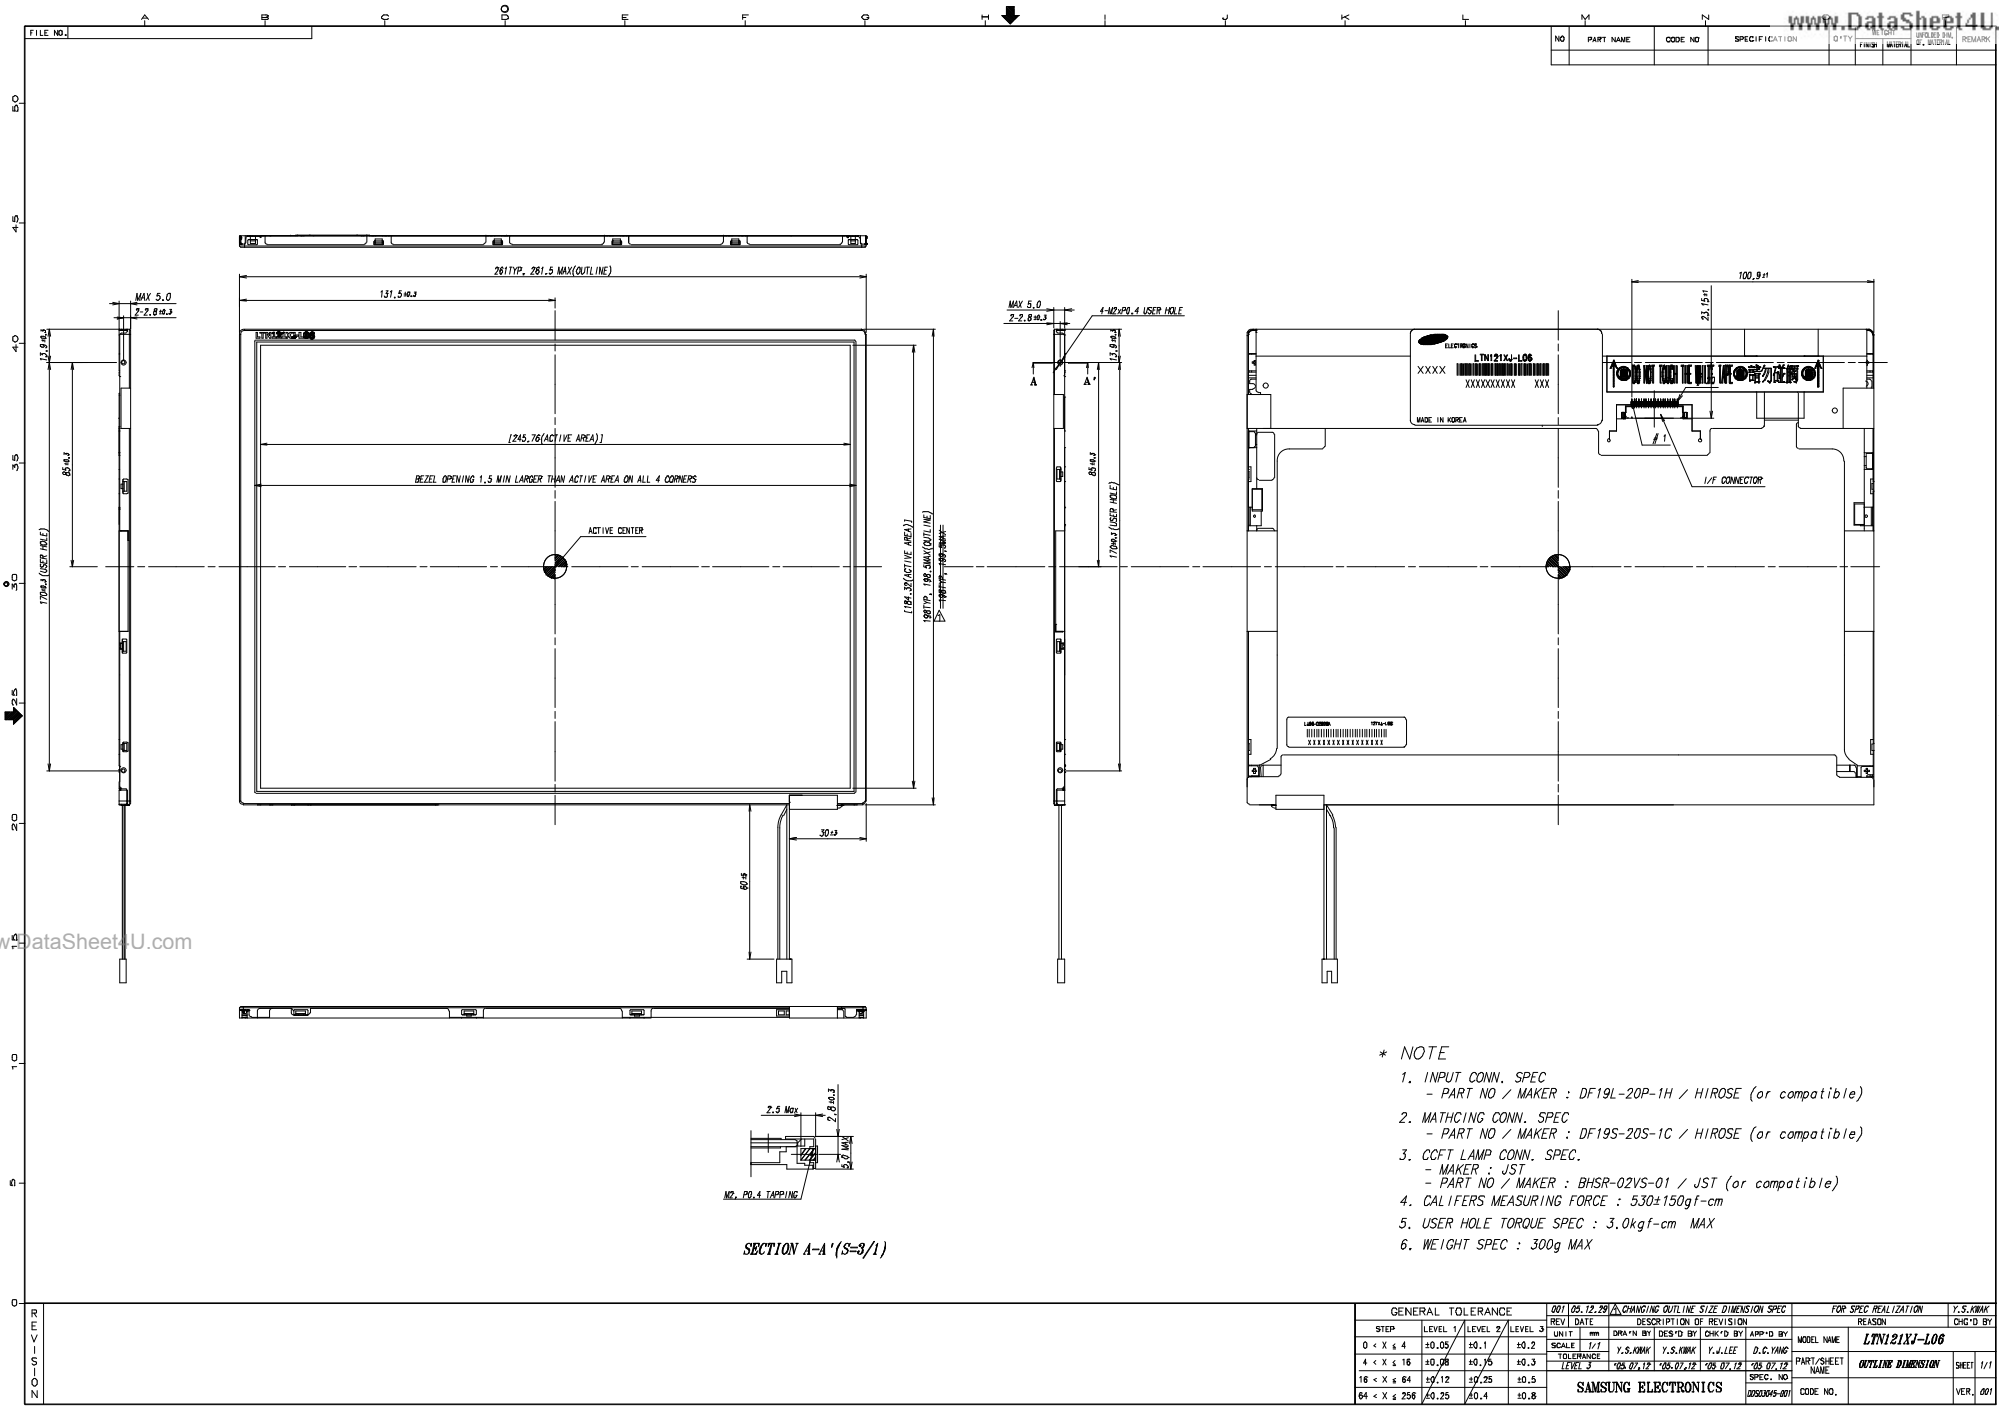

- \* NOTE
- INPUT CONN. SPEC  
- PART NO / MAKER : DF19L-20P-1H / HIROSE (or compatible)
  - MATCHING CONN. SPEC  
- PART NO / MAKER : DF19S-20S-1C / HIROSE (or compatible)
  - CCFT LAMP CONN. SPEC.  
- MAKER : JST  
- PART NO / MAKER : BHSR-02VS-01 / JST (or compatible)
  - CALIFERS MEASURING FORCE : 5.30±150gf-cm
  - USER HOLE TORQUE SPEC : 3.0kgf-cm MAX
  - WEIGHT SPEC : 300g MAX

GENERAL TOLERANCE				001 (25.12.28) CHANGING OUTLINE SIZE DIMENSION SPEC				FOR SPEC REALIZATION		Y.S.KIM	
STEP	LEVEL 1	LEVEL 2	LEVEL 3	REVISION	DATE	DESCRIPTION OF REVISION		REASON	CHK'D BY	DATE	
0 < X < 4	±0.05	±0.1	±0.2	SCALE	1/1	Y.S.KIM	Y.S.KIM	Y.J.LEE	D.C.YANG	MODEL NAME	LTN121XJ-106
4 < X < 16	±0.08	±0.15	±0.3	TOLERANCE	LEVEL 2	08.07.19	08.07.19	08.07.19	08.07.19	PART/SHEET NAME	OUTLINE DIMENSION
16 < X < 64	±0.12	±0.25	±0.5							SPEC. NO	SHEET / 1/1
64 < X < 256	±0.25	±0.4	±0.8	SAMSUNG ELECTRONICS				CODE NO.	0050045-001	VER.	001