



TO
DATE

SAMSUNG TFT-LCD

MODEL NO. : LTN140AT21-C

NOTE : Extension code [- Cxx]
→ LTN140AT21-Cxx
Surface type [**Glare**]

Any modification of Spec is not allowed without SEC's permission

Revision History ----- (3)

General Description ----- (4)

1. Absolute Maximum Ratings ----- (5)

 1.1 Absolute Ratings of environment

 1.2 Electrical Absolute Ratings

2. Optical Characteristics ----- (7)

3. Electrical Characteristics ----- (10)

 3.1 TFT LCD Module

 3.2 Backlight Unit

 3.3 LED Driver

4. Block Diagram ----- (13)

 4.1 TFT LCD Module

 4.2 LED Placement Structure

5. Input Terminal Pin Assignment ----- (14)

 5.1 Input Signal & Power

 5.2 LVDS Interface

 5.3 Timing Diagrams of LVDS For Transmitting

 5.4 Pixel format

6. Interface Timing ----- (19)

 6.1 Timing Parameters

 6.2 Timing Diagrams of interface Signal

 6.3 Power ON/OFF Sequence

7. Outline Dimension ----- (222)

8. Packing ----- (24)

9. Markings & Others ----- (25)

10. General Precautions ----- (27)

11. EDID ----- (29)

REVISION HISTORY

Approval

Date	Revision No.	Page	Summary
Dec.27	A00	All	The approval specification of LTN140AT21-Cxx was issued first.
Feb. 28. 2011	A01	P29~31	The approval spec was updated by the change of EDID.

CODE REVISION HISTORY

Date	Model.	Revision No.	Summary
Dec. 27. 2011	LTN140AT21	C01	Basic model
Apr . 29. 2011		C02	CS Mask rev. + (LED Driver IC + Avdd Level) Change + Source IC Rev.

GENERAL DESCRIPTION

DESCRIPTION

LTN140AT21 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as switching devices.
This model is composed of a TFT LCD panel, a driver circuit and a backlight unit.
The resolution of a 14.0” contains 1366 x 768 pixels and can display up to 16.2M colors.
6 O'clock direction is the optimum viewing angle.

FEATURES

- High contrast ratio
- HD(1366 x 768 pixels) resolution
- Fast Response
- LED Back Light with embedded LED Driver
- DE (Data enable) only mode
- 3.3V LVDS Interface
- Onboard EEDID chip
- 6Bit FRC.

APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	309.4 (H) x 173.952 (V) (14.0”diagonal)	mm	
Driver element	a-Si TFT active matrix		
Display colors	16.2M		
Number of pixel	1366 * 768	pixel	
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.2265(H) x 0.2265(V)	mm	
Display Mode	Normally white		
Surface treatment	Haze 0, Hardness 3H		



1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD MODULE

$V_{DD}=3.3V$, $V_{SS}=GND=0V$

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	$V_{DD}-0.3$	$V_{DD}+0.3$	V	(1)
Logic Input Voltage	V_{IN}	$V_{DD}-0.3$	$V_{DD}+0.3$	V	(1)

Note (1) Within T_a ($25 \pm 2\text{ }^{\circ}\text{C}$)

(2) BACK-LIGHT UNIT

$T_a=25 \pm 2\text{ }^{\circ}\text{C}$

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Current	I_L	-	27	-	mArms	(1)
LED Voltage	V_L	-	3.2	-	V	(1)

Note 1) Permanent damage to the device may occur if maximum values are exceeded
Functional operation should be restricted to the conditions described under normal operating conditions.

Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	323.0	323.5	324.0	mm	
	Vertical (V)	191.4	191.9	192.4	mm	
	Depth (D)	-	-	4.0	mm	PCB Area
Weight		-	-	355	g	


Note (1) Measurement condition of outline dimension
. Equipment : Bernier Calipers
. Push Force : 500g · f (minimum)

1. ABSOLUTE MAXIMUM RATINGS

1.1 ENVIRONMENTAL ABSOLUTE RATINGS

Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	TSTG	-20	60	°C	(1)
Operating temperate (Temperature of glass surface)	TOPR	0	50	°C	(1)
Shock (non-operating)	Snop	-	240	G	(2),(4)
Vibration (non-operating)	Vnop	-	2.41	G	(3),(4)

Note (1) Temperature and relative humidity range are shown in the figure below.
95 % RH Max. (40 °C ≥ Ta)
Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation

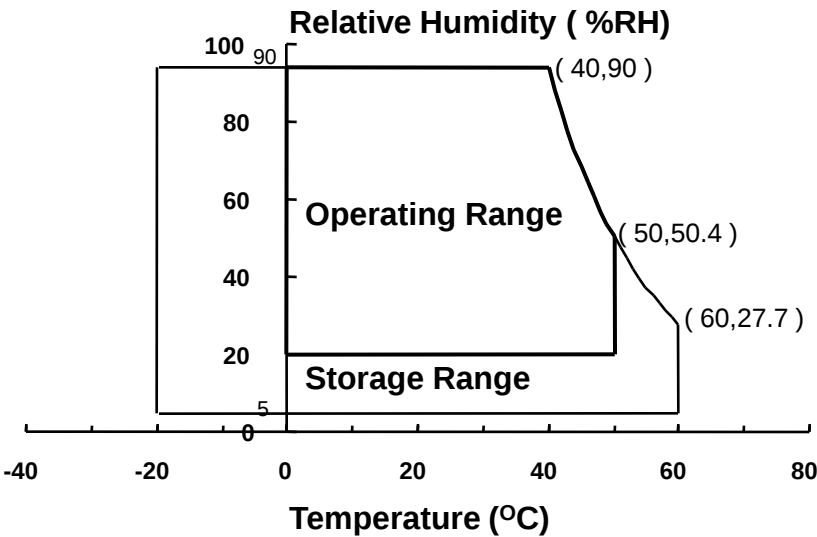

- (2) 2ms, half sine wave, one time for ±X, ±Y, ±Z.
- (3) 5 - 500 Hz, random vibration, 30min for X, Y, Z.
- (4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.


2. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5).
Measuring equipment : TOPCON SR-3

* Ta = 25 ± 2 °C, V_{DD}=3.3V, fv= 60Hz, f_{DCLK} = 70.7MHz, IF = 100% duty

Item		Symbol	Condition	Min.	Typ.	Max	Unit	Note
Contrast Ratio (5 Points)		CR	Normal Viewing Angle ϕ = 0 θ = 0	300	500	-	-	(1), (2), (5)
Response Time at Ta (Rising + Falling)		T _{RT}		-	16	25	msec	(1), (3)
Average Luminance of White (5 Points)		Y _{L,AVE}		255	300	-	cd/m²	IF=100% duty (1), (4)
Color Chromaticity (CIE)	Red	R _X		Typ- 0.03	0.578	Typ +0.03	-	(1), (5) SR-3
		R _Y			0.351			
	Green	G _X			0.342			
		G _Y			0.568			
	Blue	B _X			0.164			
		B _Y			0.118			
	White	W _X			0.313			
		W _Y	0.329					
Viewing Angle	Hor.	θ _L	CR ≥ 10 At center	40	-	-	Degrees	
		θ _H		40	-	-		
	Ver.	ϕ _H		15	-	-		
		ϕ _L		30	-	-		
Color Gamut		CG		-	45	-	%	
13 Points White Variation		δ _L		-	1.7	2.0	-	(6)

Note 1) Definition of Viewing Angle : Viewing angle range($10 \leq C/R$)

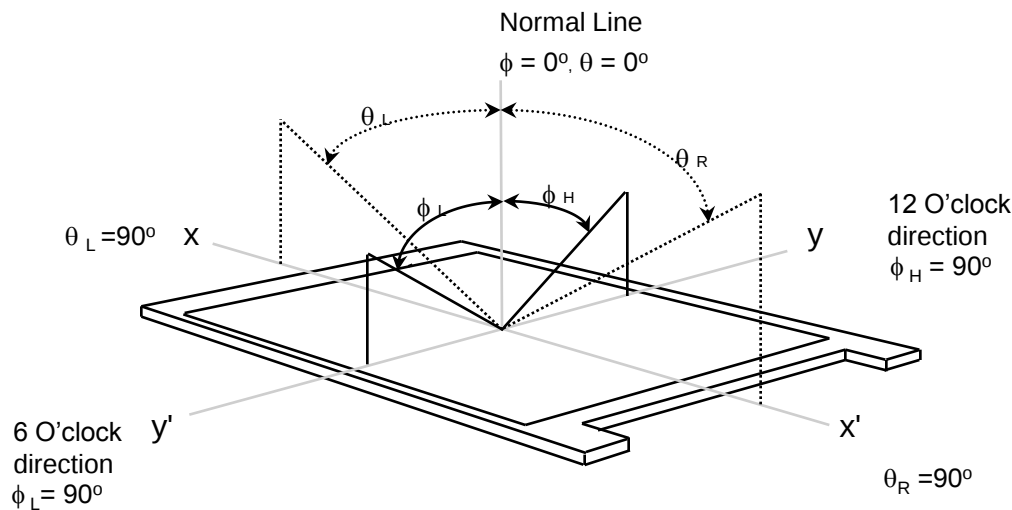


Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at 5 points(4, 5, 7, 9, 10)


$$CR = \frac{CR(4) + CR(5) + CR(7) + CR(9) + CR(10)}{5}$$

Points : (4) , (5) , (7) , (9) , (10) at the figure of Note (6).


Note 3) Definition of Response time :

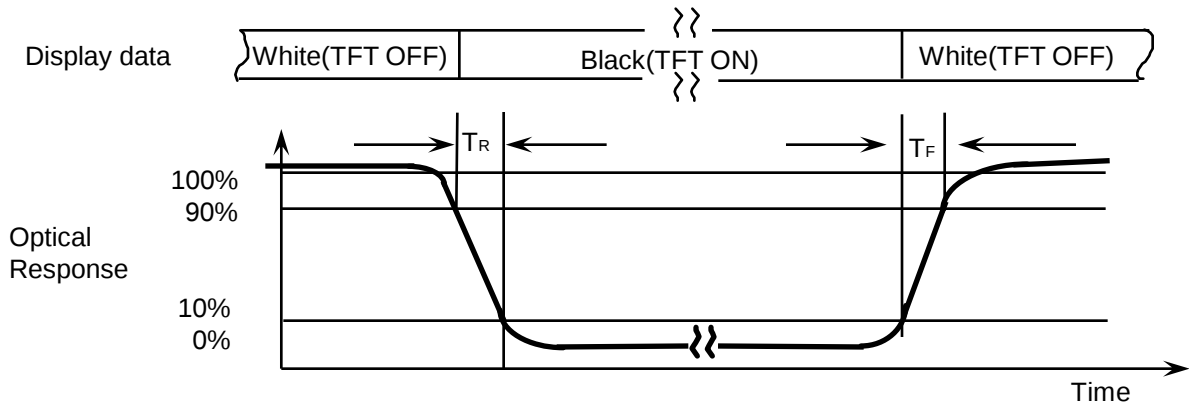

Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.

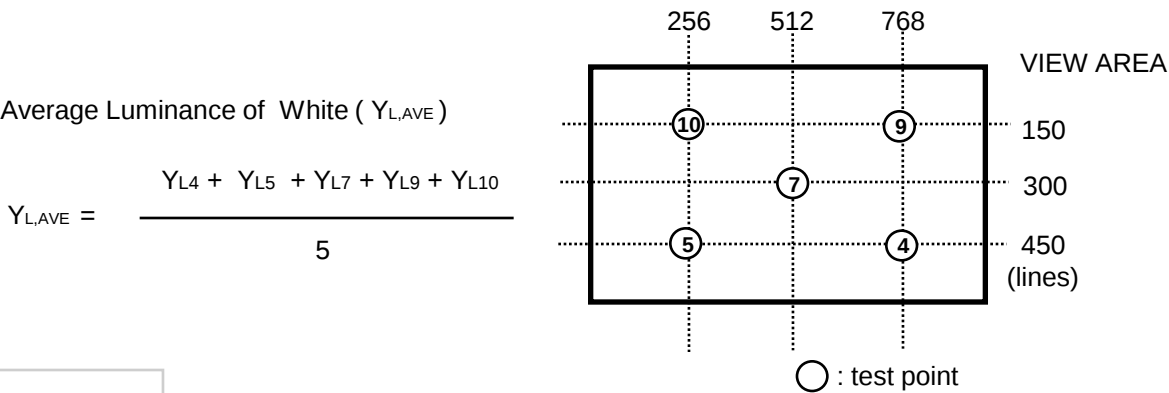


Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room.
30 min after lighting the backlight. This should be measured in the center of screen.
IF current : 27mA
Environment condition : Ta = 25 ± 2 °C

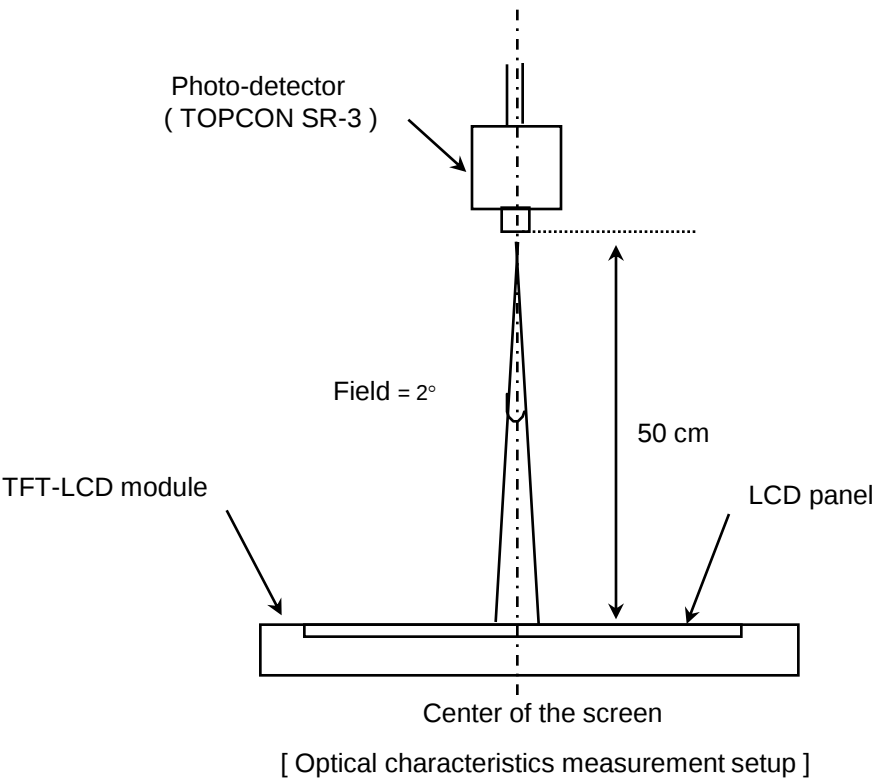

Note 6) Definition of 13 points white variation (δL), CR variation(C_{VER}) [① ~ ⑬]

$$\delta L = \frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

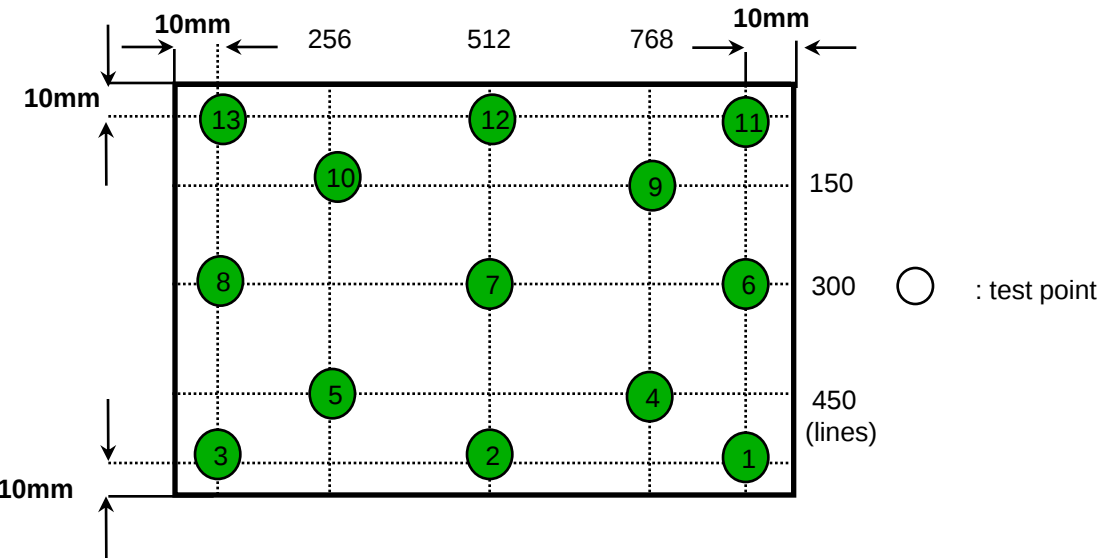

3. ELECTRICAL CHARACTERISTICS


3.1 TFT LCD MODULE

Ta= 25 ± 2°C

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V _{DD}	3.0	3.3	3.6	V	
Differential Input Voltage for LVDS Receiver Threshold	High	V _{IH}	-	-	+100	mV	V _{CM} = +1.2V
	Low	V _{IL}	-100	-	-	mV	
Vsync Frequency		f _v	-	60	-	Hz	
Main Frequency		f _{DCLK}	-	70.7	-	MHz	-
Rush Current		I _{RUSH}	-	-	1.5	A	(4)
Current of Power Supply	White	IDD	-	200	-	mA	*a),b),c)
	Mosaic		-	200	250	mA	
	V.stripe		-	200	-	mA	

- Note (1) Display data pins and timing signal pins should be connected.(GND = 0V)
- (2) f_v = 60Hz, f_{DCLK} = 70.7MHZ, V_{DD} = 3.3V , DC Current.
- (3) Power dissipation pattern


*a) White Pattern

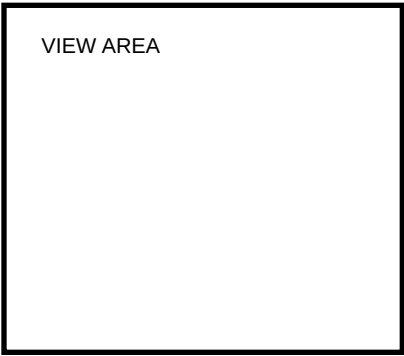


*b) Mosaic Pattern

Display Brightest Gray Level →


Display Darkest Gray Level →

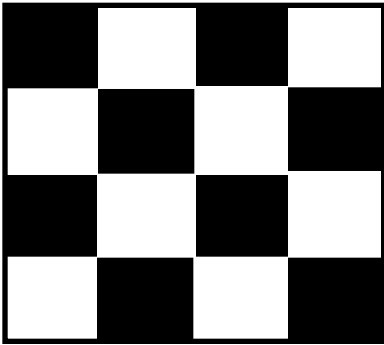


*c) 1dot Vertical stripe pattern

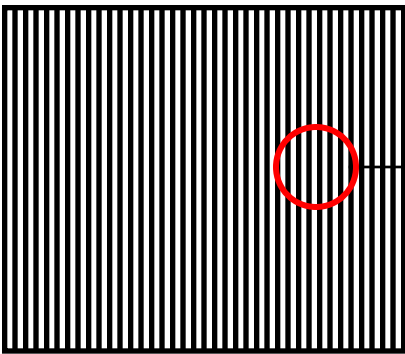

4) Rush current measurement condition

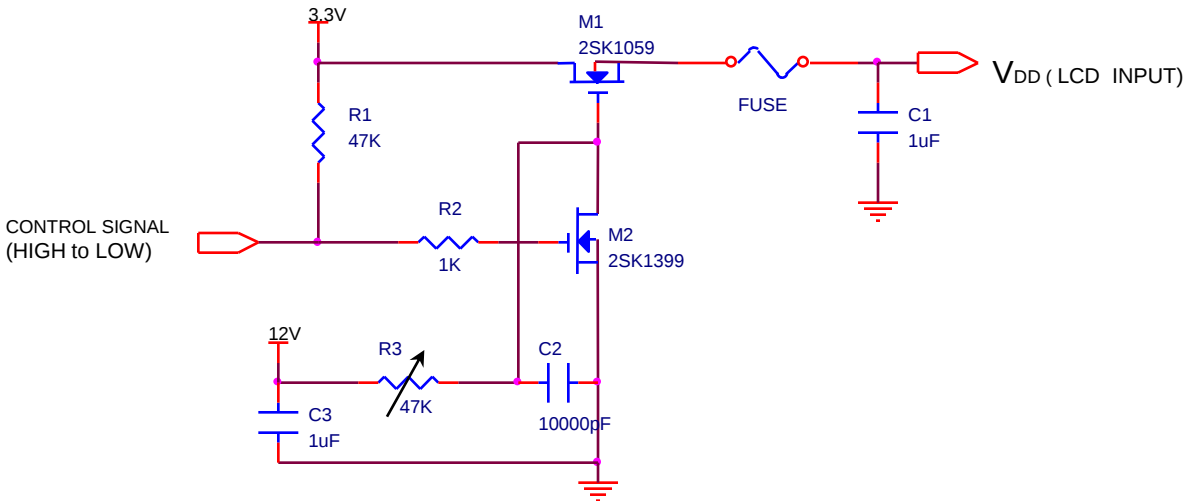

V_{DD} rising time is 470us

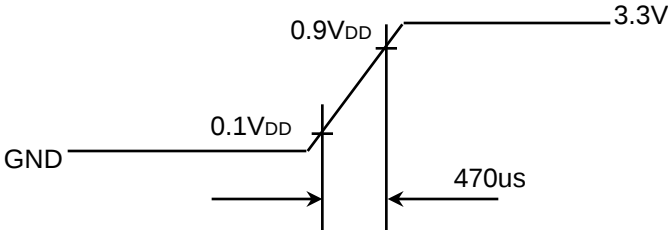

3.2 LED Driver

- On board LED Driver (Intersil)

Ta= 25 ± 2 °C

Item-	Symbol	Min.	Typ.	Max.	Unit	Note
Input Voltage	V _{in}	7	12	20	V	-
Input Current	I	-	270	-	mA	-
EN control level	ON	1.5	3.3	5.0	V	
	OFF	0	0	0.5	V	
PWM control level	ON	1.5	3.3	5.0	V	
	OFF	0	0	0.1	V	
PWM Control Duty Ratio	D	10	-	100	%	
External PWM Dimming Control Frequency (BLIM)	F _{BLIM}	-	1	10	kHz	
Operating Life Time	Hr	10,000	-	-	Hour	

Note (1) Life time (Hr) of LEDs can be defined as the time in which it continues to operate under the condition Ta= 25 ± 2 °C and IF = 27 mArms until one of the following event occurs.
When the brightness becomes 50% or lower than the original.


3.3 BACK-LIGHT UNIT

Ta= 25 ± 2 °C


Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Forward Current	IF	-	27	-	mA	
LED Forward Voltage	VF	3.0	3.2	3.4	V	
LED Array Voltage	VP	-	25.6	-	V	VF X 8 LEDs
BL consumption	P	-	-	0.85	W	@ 60 nit

4. BLOCK DIAGRAM

4.1 TFT LCD Module

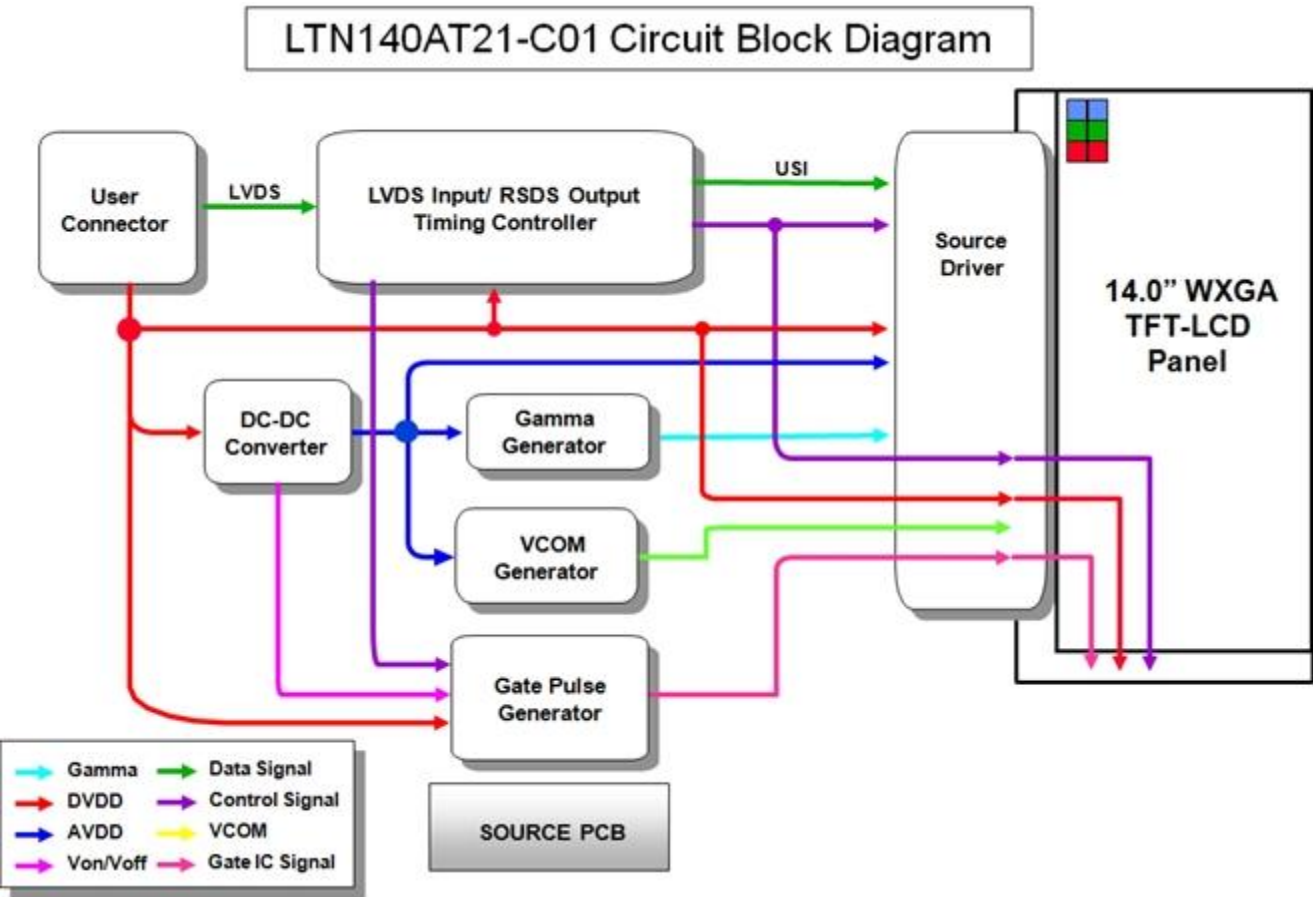

4.2 LED placement structure

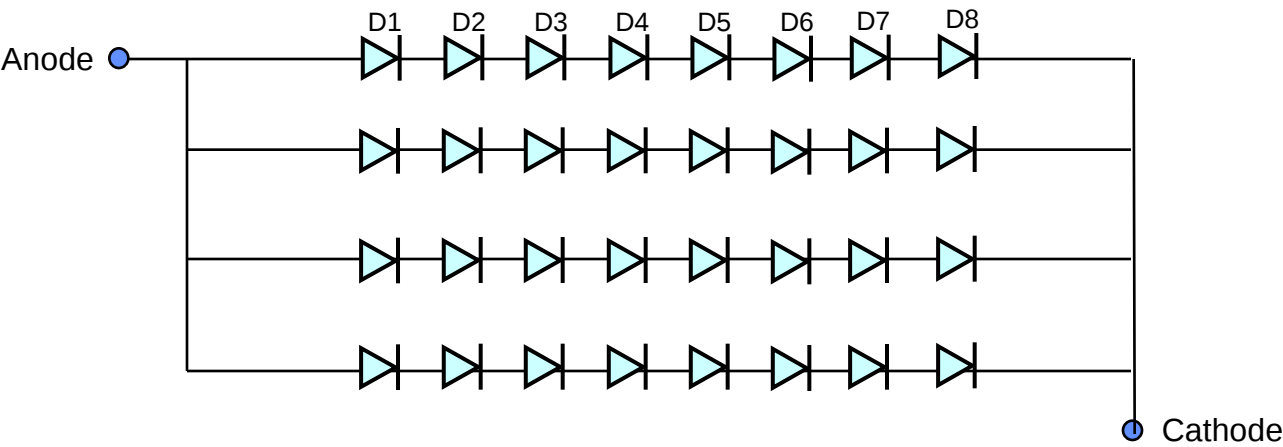

5. INPUT TERMINAL PIN ASSIGNMENT

Approval

5.1. Input Signal & Power (LVDS, Connector : I-PEX 20455-040E-## or equivalent)


No.	Symbol	Function	Polarity	Remarks
1	NC	No Connection (Reserved for supplier)		
2	AVDD	Power Supply 3.3V (typical)		
3	AVDD	Power Supply 3.3V (typical)		
4	DVDD	DDC 3.3V power		
5	NC	No Connection		
6	SCL	DDC Clock		
7	SDA	DDC data		
8	RIN0-	-LVDS differential data input (R0-R5, G0)	Negative	
9	RIN0+	+LVDS differential data input (R0-R5, G0)	Positive	
10	GND	Ground		
11	RIN1-	-LVDS differential data input (G1-G5, B0-B1)	Negative	
12	RIN1+	+LVDS differential data input (G1-G5, B0-B1)	Positive	
13	GND	Ground		
14	RIN2-	-LVDS differential data input (B2-B5, HS, VS, DE)	Negative	
15	RIN2+	+LVDS differential data input (B2-B5, HS, VS, DE)	Positive	
16	GND	Ground		
17	CLK-	-LVDS differential clock input	Negative	
18	CLK+	+LVDS differential clock input	Positive	
19	GND	Ground		
20	RIN2-	-LVDS differential data input (R/G/B 6-7)	Negative	
21	RIN2+	+LVDS differential data input (R/G/B 6-7)	Positive	
22	GND	Ground		
23	NC	No connection		
24	NC	No connection		
25	GND	Ground		
26	NC	No connection		
27	NC	No connection		
28	GND	Ground		
29	NC	No Connect		
30	NC	No Connect		

No.	Symbol	Function	Polarity	Remarks
31	VSSLED	Ground – LED		
32	VSSLED	Ground – LED		
33	VSSLED	Ground – LED		
34	NC	No Connect		
35	PWM	System PWM Signal Input (+3.3V Swing)		
36	LED_EN	LED enable pin (+3.3V Input)		
37	APS	APS Enable. (On +3.3V)		
38	VDDLED	6.0V – 24V LED power		
39	VDDLED	6.0V – 24V LED power		
40	VDDLED	6.0V – 24V LED power		

5.2 LVDS Interface

5.2.1 LVDS DC Input


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
LVDS Differential Voltage	VID	100	200	400	mV	
Input Common Mode Voltage	V _{CM}	0.4	1.2	1.6	V	

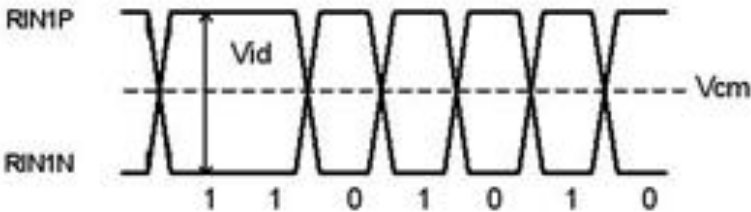

5.2.1 LVDS AC Input

ITEM		SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
LVDS input Clock Frequency		F _{CLK_LVDS}	30		100	Mhz	
LVDS RX skew Right margin	100MHz	T _{RSRM}	–	–	270	ps	(1),(2)
	50MHz		–	–	700	ps	(1),(2)
LVDS RX skew Left margin	85MHz		–270	–	–	ps	(1),(2)
	50MHz		–700	–	–	ps	(1),(2)
Maximum deviation of LVDS input clock during SSCG		F _{CLK_DEV}	–	–	(± 3)	%	(3)
Modulating frequency of LVDS input clock during SSCG		F _{CLK_MOD}	(30)	–	(300)	KHz	(3)


Note (1) : LVDS Receiver Skew (Strobe) Margin

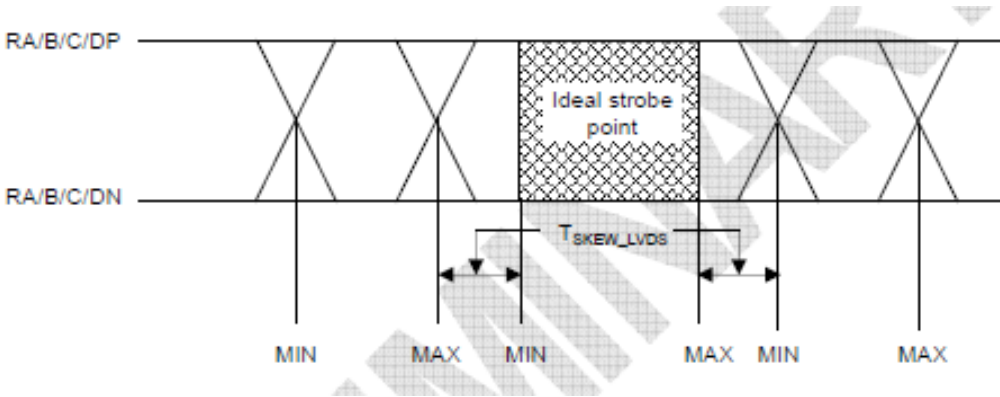


5.3 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-con

* 8Bit NS Format

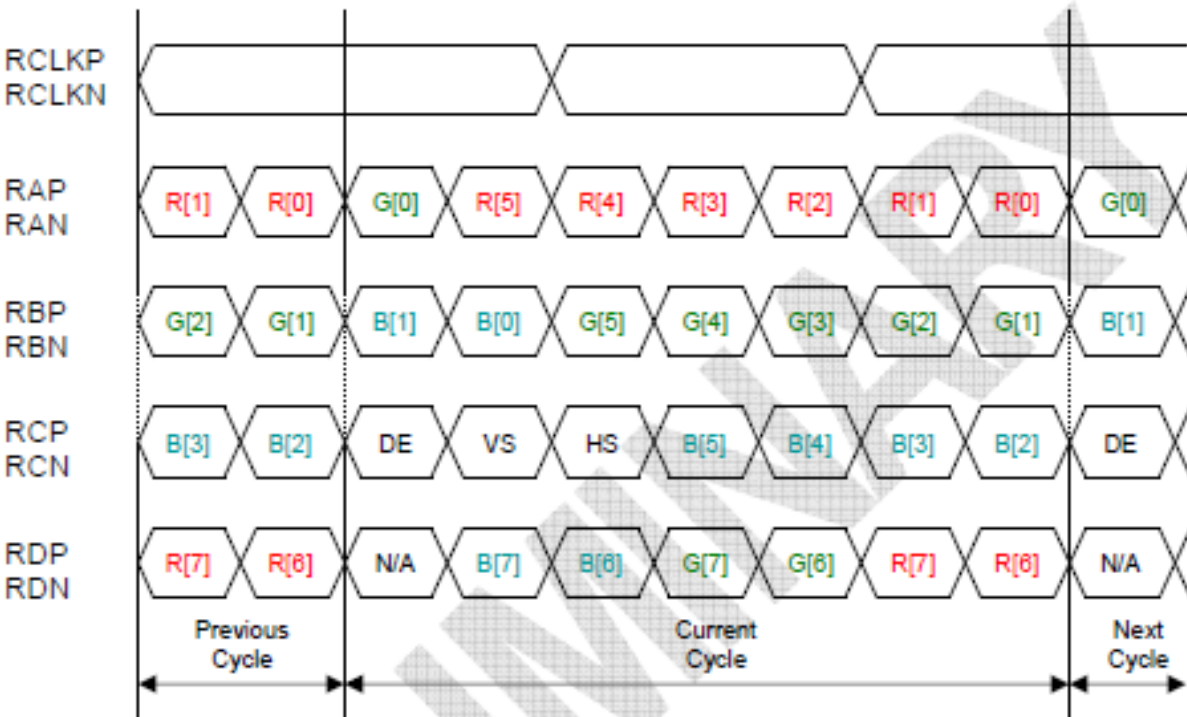

5.4 Pixel Format in the display

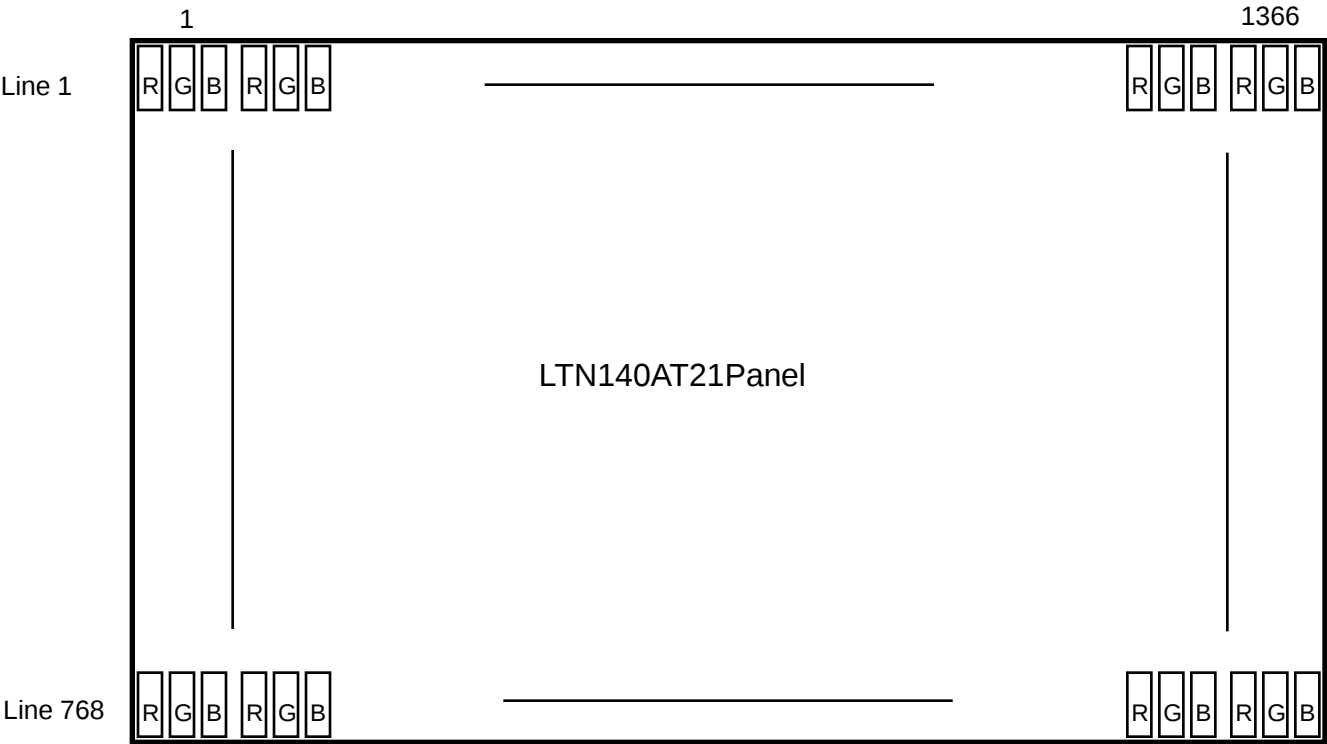


6. INTERFACE TIMING

6.1 Timing Parameters

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	TV	780	790	980	Lines	
Vertical Active Display Term	Display Period	TVD	-	768	-	Lines	
One Line Scanning Time	Cycle	TH	1440	1526	1800	Clocks	
Horizontal Active Display Term	Display Period	THD	-	1366	-	Clocks	


6.2 Timing diagrams of interface signal

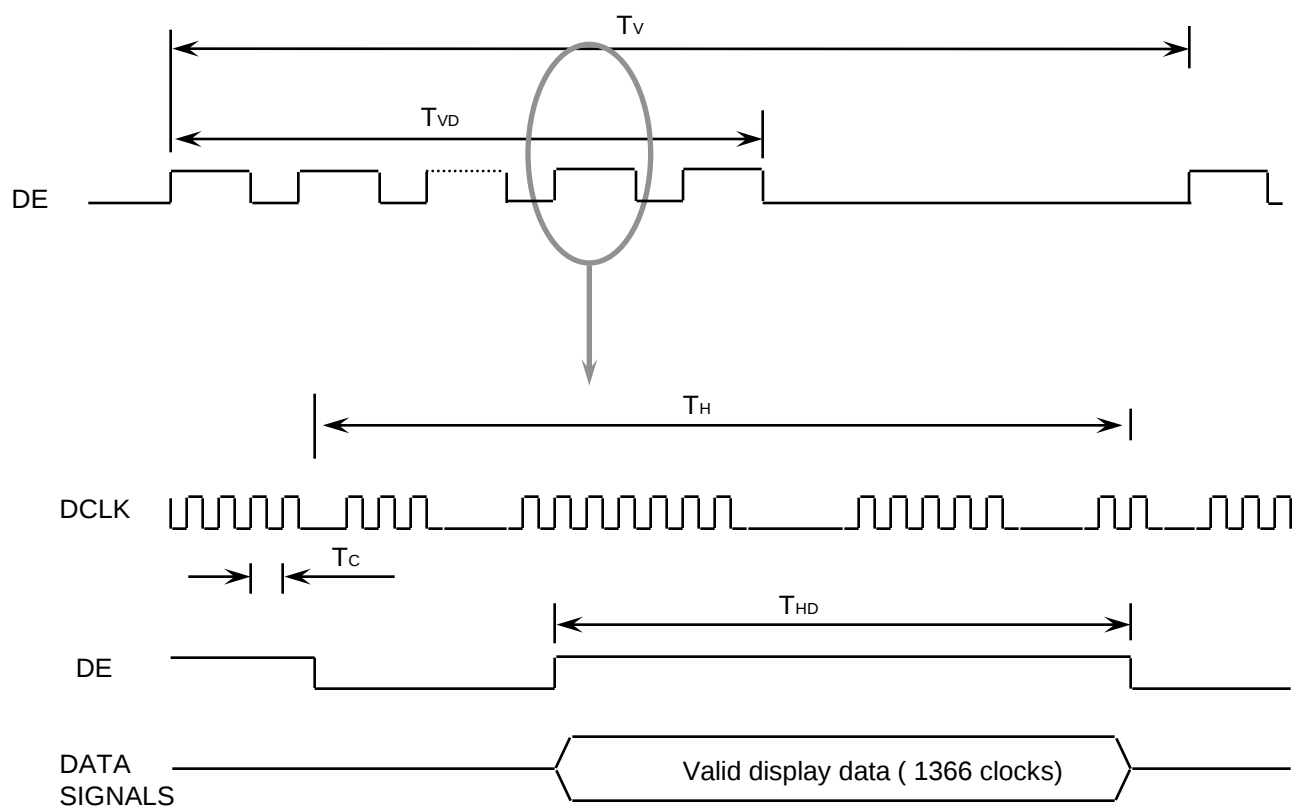

6.3 Power ON/OFF Sequence

Approval

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

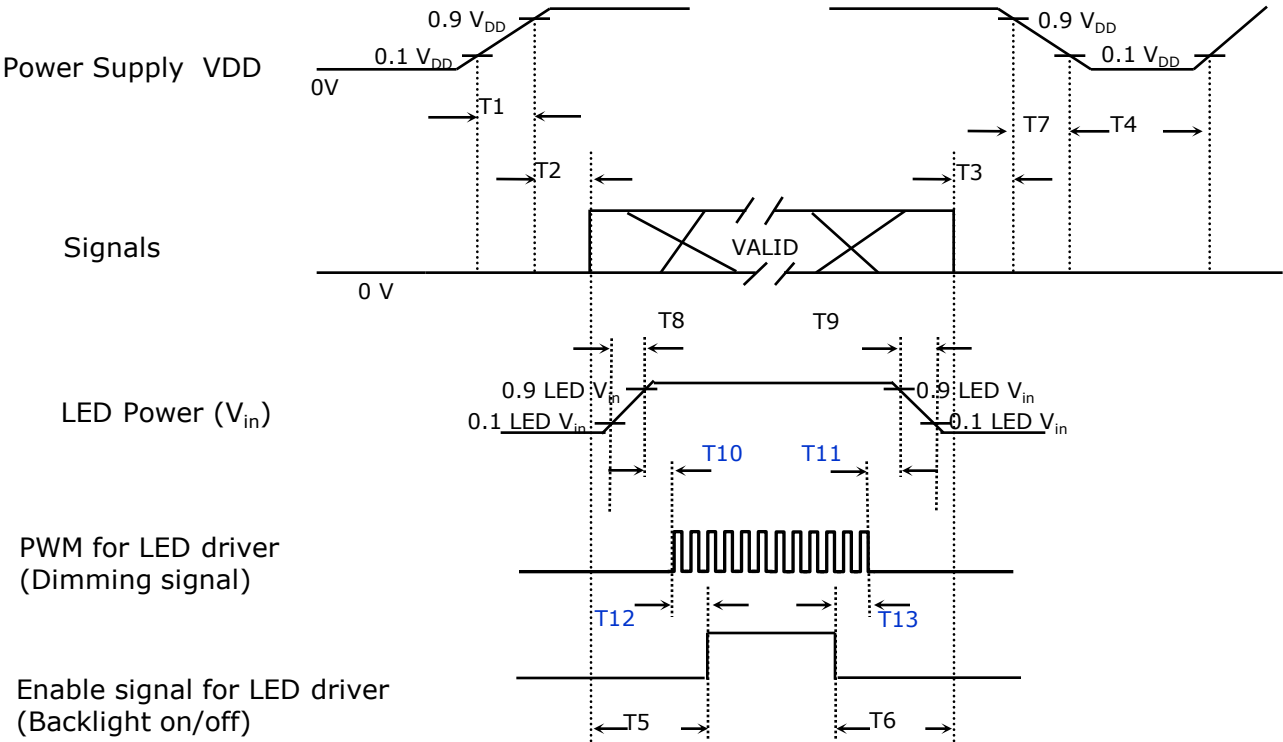

Power ON/OFF Sequence

Timing (ms)	Remarks
$0.5 < T1 \leq 10$	V _{DD} rising time from 10% to 90%
$0 < T2 \leq 50$	Delay from V _{DD} to valid data at power ON
$0 < T3 \leq 50$	Delay from valid data OFF to V _{DD} OFF at power Off
$500 \leq T4$	V _{DD} OFF time for Windows restart
$200 \leq T5$	Delay from valid data to B/L enable at power ON
$200 \leq T6$	Delay from valid data off to B/L disable at power Off
$0 < T7 \leq 10$	V _{DD} falling time from 90% to 10%
$0.5 < T8 \leq 10$	LED V _{in} rising time from 10% to 90%
$0.5 < T9 \leq 10$	LED V _{in} falling time from 90% to 10%
$0 \leq T10$	Delay from LED driver Vin rising time 90% to PWM ON
$0 \leq T11$	Delay from PWM Off to LED driver Vin falling time 10%, Must Keep rule
$0 \leq T12$	Delay from PWM ON to B/L Enable ON, Must Keep rule
$0 \leq T13$	Delay from B/L Enable Off to PWM Off

Power Sequence & Timing Parameters







NOTE.

- (1) The supply voltage of the external system for the module input should be the same as the definition of V_{DD} .
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of V_{DD} = off level, please keep the level of input signals on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

7. Mechanical Outline Dimension

Approval

Refer to the next page

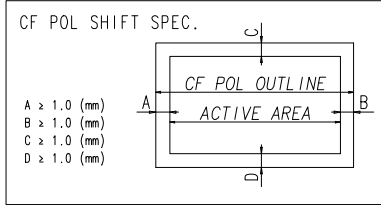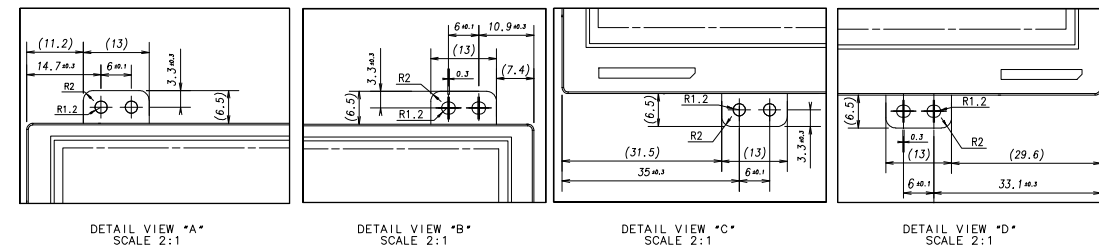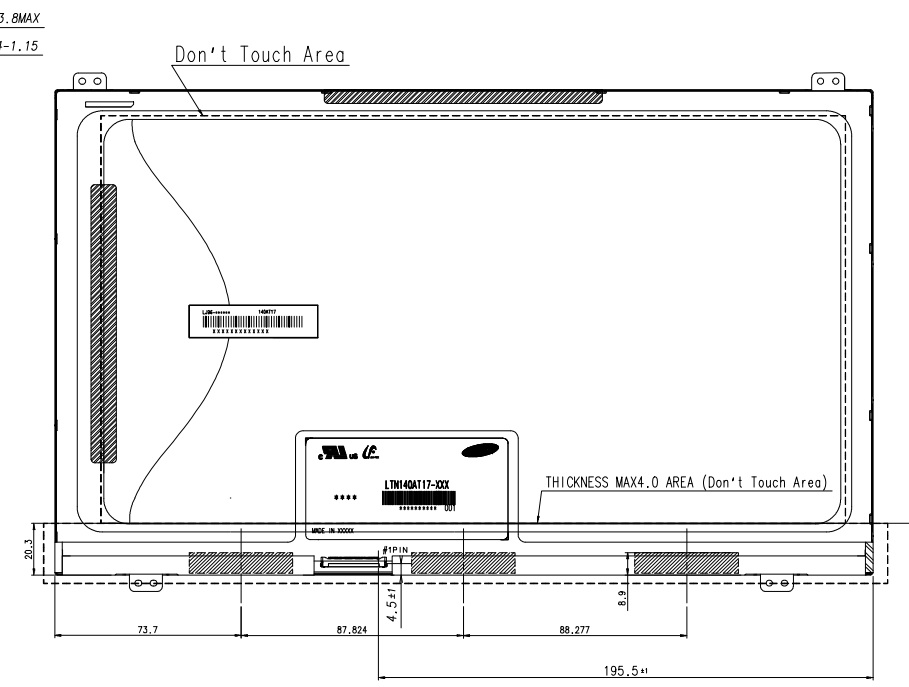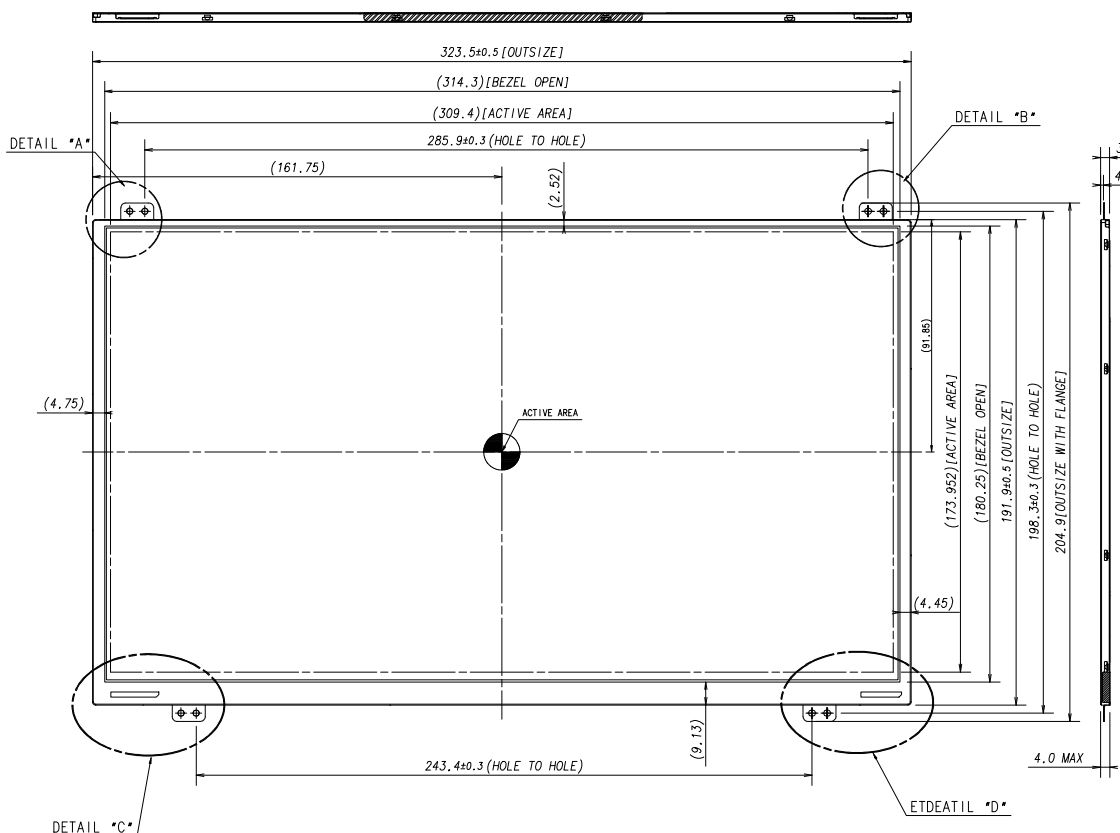

- * NOTE
1. SIGNAL INTERFACE CONNECTOR TO BE SPECIFIED AS BELOW.
- PART NO./MAKER : 20455-040E-02R / I-PEX
 2. THICKNESS MEASURING FORCE : 750gf
 3. WEIGHT : 355g MAX
 4. In order to avoid IC damage, it is not allow that overlapping of cables or antennas, camera, WLAN, WWAN over these COF location

REV	DATE	DESCRIPTION OF REVISION	REASON	CHK'D BY
UNIT	mm	DRA'N BY DES'D BY CHK'D BY APP'D BY	MODEL NAME	LTN140AT17-001/C01
SCALE	1/1	H.S.CHUN	PART/SHEET NAME	OUTLINE DIMENSION SHEET 1/1
GENERAL TOLERANCE	±0.5	29.08.04	SPEC. NO.	VER. 000
SAMSUNG ELECTRONICS				CODE NO.


8. PACKING

Approval

1. CARTON(Internal Package)

- (1) Packing Form
Corrugated fiberboard box and corrupad form as shock absorber

(2) Packing Method

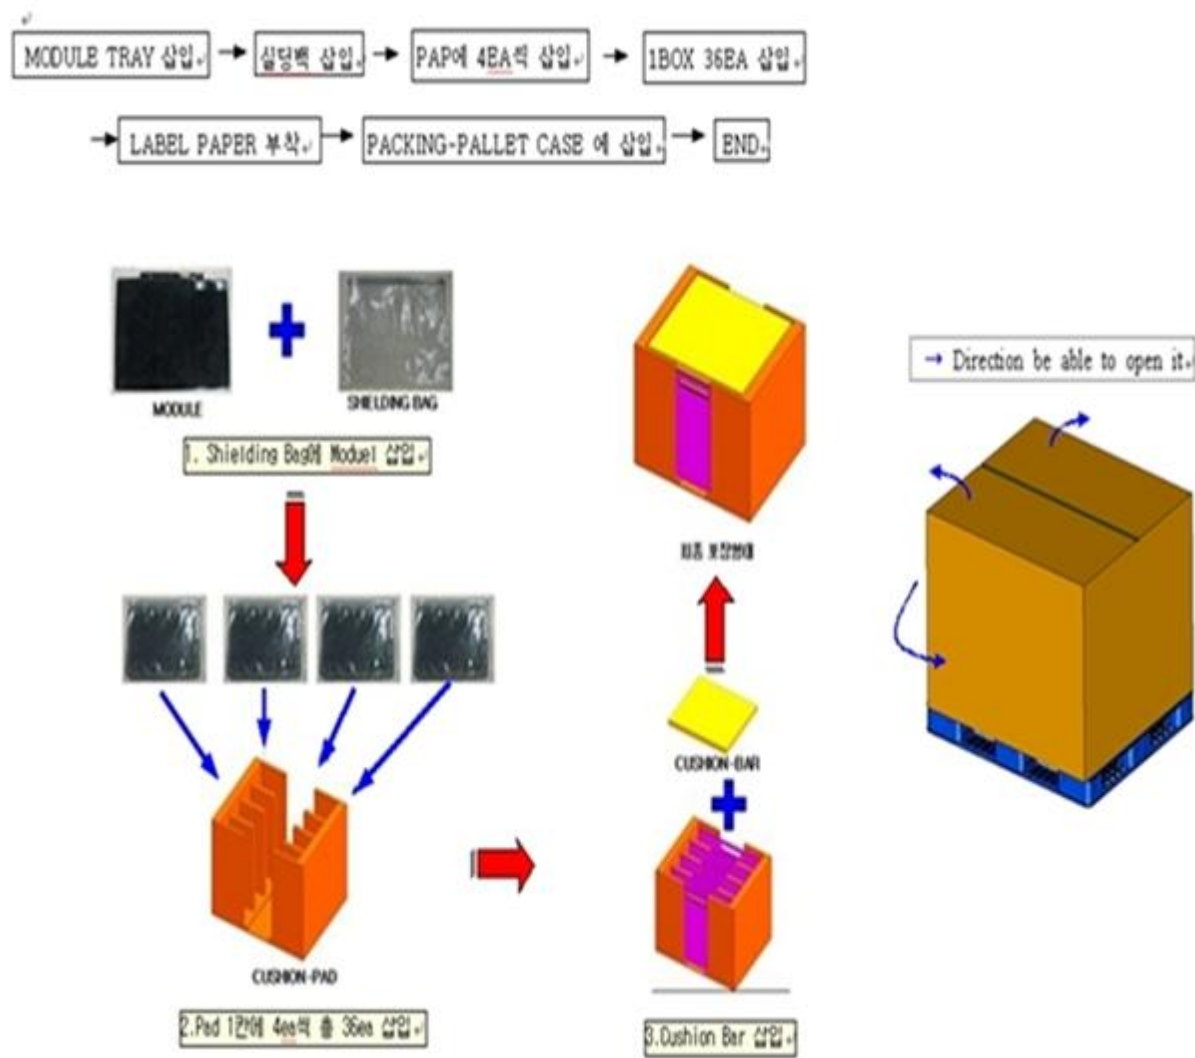

- Note 1)Total Weight : Approximately 15.4 kg
2) Acceptance number of piling : 36 sets
3) Carton size : 373(W) × 410(D) × 329(H)

(3)Packing Material

No	Part name	Quantity
1	Static electric protective sack	36
2	Packing case (Inner box) included shock absorber	1 set
3	Pictorial marking	2 pcs
4	Carton	1 set


9. MARKINGS & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


(1)Parts number : LTN140AT21

(2)Revision code : 3 letters

(3)Lot number : X X X X XXX XX X Cxx

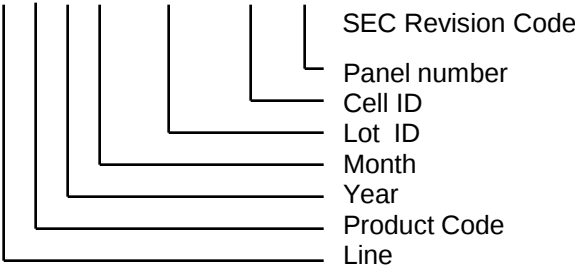


(5) Nameplate Indication

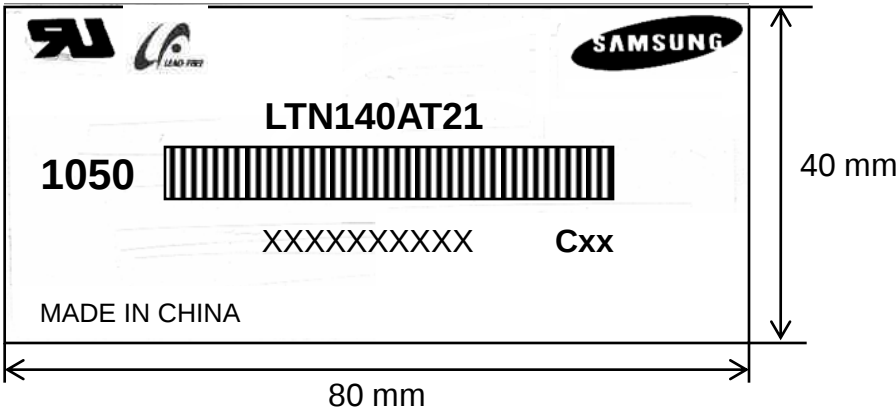


Parts name : LTN140AT21
Lot number : XXXXXXXXXX
Inspected work week : 1050(2010 year, 50nd week)



High voltage caution label

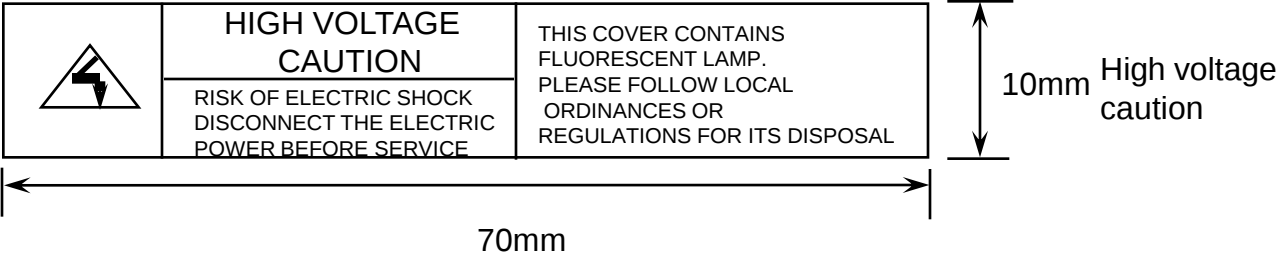

(6) Packing small box attach

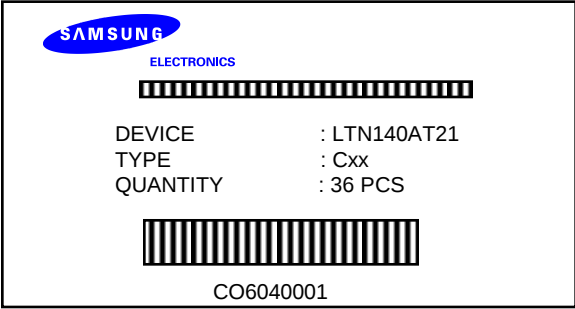

1. Handling

- (a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module and CCFT back-light.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA (Isoprophyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static , it may cause damage to the C-MOS Gate Array IC.
- (i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Do not pull or fold the lamp wire.
- (l) Do not adjust the variable resistor which is located on the back side.
- (m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector shall not be touched directly with bare hands.

2. STORAGE

- (a) Do not leave the module in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 5 to 40 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module under the direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during storage.
- (d) Storage period is recommended not to exceed 1 year.

3. OPERATION

- (a) Do not connect,disconnect the module in the “ Power On” condition.
- (b) Power supply should always be turned on/off by following item 6.3
“ Power on/off sequence “.
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

4. OTHERS

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on)
Otherwise the module may be damaged.
- (d) If the module displays the same pattern continuously for a long period of time,it can be the situation when the image “sticks” to the screen.
- (e) This module has its circuitry PCB’s on the rear side and should be handled carefully in order not to be stressed.

11. EDID

Approval

Address	FUNCTION	Value	BIN	DEC	ASCII or Data	Notes
(HEX)		HEX				
00	Header	00	00000000	0		EDID Header
01		FF	11111111	255		
02		FF	11111111	255		
03		FF	11111111	255		
04		FF	11111111	255		
05		FF	11111111	255		
06		FF	11111111	255		
07		00	00000000	0		
08	ID Manufacturer Name	4C	01001100	76	S	3 character ID
09		A3	10100011	163	E C	"SEC"
0A	ID Product Code	49	01001001	73	[1]	
0B		33	00110011	51	[3]	
0C	32-bit serial no.	00	00000000	0		
0D		00	00000000	0		
0E		00	00000000	0		
0F		00	00000000	0		
10	Week of manufacture	00	00000000	0		
11	Year of manufacture	15	00010101	21	2011	2011
12	EDID Structure Ver.	01	00000001	1	1	EDID Ver. 1.0
13	EDID revision #	03	00000011	3	3	EDID Rev. 3
14	Video input definition	80	10000000	128		
15	Max H image size	1F	00011111	31	31	31 cm(approx)
16	Max V image size	11	00010001	17	17	17 cm(approx)
17	Display Gamma	78	01111000	120	2.2	Gamma 2.2
18	Feature support	0A	00001010	10		
19	Red/green low bits	09	00001001	9		10000111
1A	Blue/white low bits	E5	11100101	229		11111110
1B	Red x/ high bits	97	10010111	151	0.590	Red x0.615= 1001010010
1C	Red y	57	01010111	87	0.340	Red y0.325= 0101011100
1D	Green x	54	01010100	84	0.330	Green x0.300= 0100111101
1E	Green y	8A	10001010	138	0.540	Green y0.570= 1000110011
1F	Blue x	27	00100111	39	0.155	Blue x0.145= 0010011111
20	Blue y	22	00100010	34	0.135	Blue y0.080= 0010011111
21	White x	50	01010000	80	0.313	White x0.313= 0101000001
22	White y	54	01010100	84	0.329	White y0.329= 0101010001
23	Established timing 1	00	00000000	0		
24	Established timing 2	00	00000000	0		
25	Established timing 3	00	00000000	0		

26	Standard timing #1	01	00000001	1		not used
27		01	00000001	1		
28	Standard timing #2	01	00000001	1		not used
29		01	00000001	1		
2A	Standard timing #3	01	00000001	1		not used
2B		01	00000001	1		
2C	Standard timing #4	01	00000001	1		not used
2D		01	00000001	1		
2E	Standard timing #5	01	00000001	1		not used
2F		01	00000001	1		
30	Standard timing #6	01	00000001	1		not used
31		01	00000001	1		
32	Standard timing #7	01	00000001	1		not used
33		01	00000001	1		
34	Standard timing #8	01	00000001	1		not used
35		01	00000001	1		
36	Detailed timing/monitor descriptor #1	9E	10011110	158	70.7	Main clock= 70.44 MHz
37		1B	00011011	27		
38		56	01010110	86	1366	Hor active=1366 pixels
39		78	01111000	120	120	Hor blanking=160 pixels
3A		50	01010000	80		4bit : 4bit
3B		00	00000000	0	768	Vertical active=768 lines
3C		18	00011000	24	24	Vertical blanking=22 lines
3D		30	00110000	48		4bit : 4bit
3E		30	00110000	48	48	
3F		20	00100000	32	32	H sync. Width=32 pixels
40		25	00100101	37	2	V sync. Offset=2 lines
					5	V sync. Width=5 lines
41		00	00000000	0		2bit : 2bit :2bit :2bit
42		35	00110101	53	309	H image size= 309 mm(approx)
43		AE	10101110	174	174	Vimage size = 173 mm(approx)
44		10	00010000	16		
45		00	00000000	0		No Horizontal Border
46		00	00000000	0		No Vertical Border
47		19	00011001	25		
48	Detailed timing/monitor descriptor #2	00	00000000	0		Manufacturer Specified (Timing)
49		00	00000000	0		
4A		00	00000000	0		
4B		0F	00001111	15		
4C		00	00000000	0		
4D		00	00000000	0		Value=HSPWmin / 2
4E		00	00000000	0		Value=HSPWmax / 2
4F		00	00000000	0		Value=Thbpmin / 2
50		00	00000000	0		Value=Thbpmax / 2
51		00	00000000	0		Value=VSPWmin / 2
52		00	00000000	0		Value=VSPWmax / 2
53		00	00000000	0		Value=Tvpbmin / 2
54		00	00000000	0		Value=Tvpbmax / 2
55		1E	00011110	30		Thpmin=value*2 + HA pixelClks
56		B4	10110100	180		Thpmax=value*2 + HA pixelClks
57		02	00000010	2		Tvpmin=value*2 + VA lines
58		74	01110100	116		Tvpmax=value*2 + VA lines
59		00	00000000	0		Module revision

5A	Detailed timing/monitor descriptor #3	00	00000000	0		ASCII Data String Tag
5B		00	00000000	0		
5C		00	00000000	0		
5D		FE	11111110	254		
5E		00	00000000	0		
5F		53	01010011	83	[S]	
60		41	01000001	65	[A]	
61		4D	01001101	77	[M]	
62		53	01010011	83	[S]	
63		55	01010101	85	[U]	
64		4E	01001110	78	[N]	
65		47	01000111	71	[G]	
66		0A	00001010	10	[^]	
67		20	00100000	32	[]	
68		20	00100000	32	[]	
69		20	00100000	32	[]	
6A		20	00100000	32	[]	
6B		20	00100000	32	[]	
6C	Detailed timing/monitor descriptor #4	00	00000000	0		Monitor Name Tag (ASCII)
6D		00	00000000	0		
6E		00	00000000	0		
6F		FE	11111110	254		
70		00	00000000	0		
71		4C	01001100	76	[L]	
72		54	01010100	84	[T]	
73		4E	01001110	78	[N]	
74		31	00110001	49	[1]	
75		34	00110100	52	[4]	
76		30	00110000	48	[0]	
77		41	01000001	65	[A]	
78		54	01010100	84	[T]	
79		32	00110010	50	[2]	
7A		31	00110001	49	[1]	
7B		43	01000011	67	[C]	
7C		30	00110000	48	[0]	
7D		31	00110001	49	[1]	
7E	Extension Flag	00	00000000	0		
7F	Checksum	BF	10111111	191		