

**SAMSUNG****ELECTRONICS**

Approval



TO : Apple / Quanta

DATE : June. 12, 2009

SAMSUNG TFT-LCD**MODEL NO : LTN154BT08-R06**Surface type [**Glossy**]Any Modification of Spec is not allowed without SEC' permissionAPPROVED BY : SS SeomunPREPARED BY : LCD Application engineering part 1**SAMSUNG ELECTRONICS CO., LTD.****Samsung Secret**

Doc.No.	LTN154BT08-R06	Rev.No	04-A00-S-090612	Page	1 / 31
---------	----------------	--------	-----------------	------	--------



Approval

CONTENTS

Revision History	----- (3)
General Description	----- (4)
1. Absolute Maximum Ratings	----- (5)
1.1 Absolute Ratings of environment	
1.2 Electrical Absolute Ratings	
2. Optical Characteristics	----- (7)
3. Electrical Characteristics	----- (10)
3.1 TFT LCD Module	
3.2 Backlight Unit	
4. Block Diagram	----- (13)
4.1 TFT LCD Module	
4.2 Backlight Unit	
5. Input Terminal Pin Assignment	----- (14)
5.1 Input Signal & Power	
5.2 LVDS Interface	
5.3 Backlight Unit	
5.4 Timing Diagrams of LVDS For Transmitting	
5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color.	
5.6 Pixel format	
6. Interface Timing	----- (21)
6.1 Timing Parameters	
6.2 Timing Diagrams of interface Signal	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	----- (23)
8. General Precaution	----- (27)
9. EDID	----- (29)

Samsung Secret



REVISION HISTORY

Approval

Date	Revision No.	Page	Summary
Feb. 11, 2009	P00	All	LTN154BT08-R03 is issued first.
May. 22, 2009	A00	All	LTN154BT08-R03 Model spec was approved.
June. 12, 2009	A00	All	The Code of LTN154BT08-R03 was changed to LTN154BT08-R06. (EEPROM data & R2 of PBA was changed for improvement of A/D)
www.panelook.com			
Samsung Secret			

Doc.No. LTN154BT08-R06

Rev.No

04-A00-S-090612

Page

3 / 31

Approval

GENERAL DESCRIPTION

DESCRIPTION

LTN154BT08-R06 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight system. The resolution of a 15.4" contains 1440 x 900 pixels and can display up to 262,144 colors. 6 O'clock direction is the Optimum viewing angle.

FEATURES

- Thin and light weight
- High contrast ratio, high aperture structure
- Wide XGA+ (1440x900 pixels) resolution
- Fast Response Time
- Low power consumption
- LED BLU Structure
- DE (Data enable) only mode.
- 3.3V Dual channel LVDS
- On board EDID chip
- Pb-free product

APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	331.344(H) X 207.090(V) (15.4"diagonal)	mm	
Driver element	a-si TFT active matrix		
Display colors	262,144		
Number of pixel	1440 x 900 (16 : 10, Wide XGA)	pixel	
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.2301(H) x 0.2301(V)	mm	
Display Mode	Normally white		
Surface treatment	Haze 0, Hard-Coating 3H		ARC 7

Samsung Secret

Doc.No.	LTN154BT08-R06	Rev.No	04-A00-S-090612	Page	4 / 31
---------	----------------	--------	-----------------	------	--------

Mechanical Information

Approval

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	342.55	342.85	343.15	mm	
	Vertical (V)	220.54	220.84	221.14	mm	
	Depth (D)	3.43	3.73	4.03	mm	(1)
Weight		-	440	450	g	

Note (1) Measurement condition of outline dimension

- Equipment : Vernier Calipers
- Push Force : 500g · f (minimum)

1. ABSOLUTE MAXIMUM RATINGS


1.1 ENVIRONMENTAL ABSOLUTE RATINGS

Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	TSTG	-25	65	°C	(1)
Operating temperate (Temperature of glass surface)	TOPR	0	50	°C	(1)
Shock (non-operating)	Snop	-	240	G	(2),(4)
Vibration (non-operating)	Vnop	-	2.41	G	(3),(4)

Note (1) Temperature and relative humidity range are shown in the figure below.

95 % RH Max. ($40^{\circ}\text{C} \geq T_a$)

Maximum wet - bulb temperature at 39°C or less. ($T_a > 40^{\circ}\text{C}$) No condensation

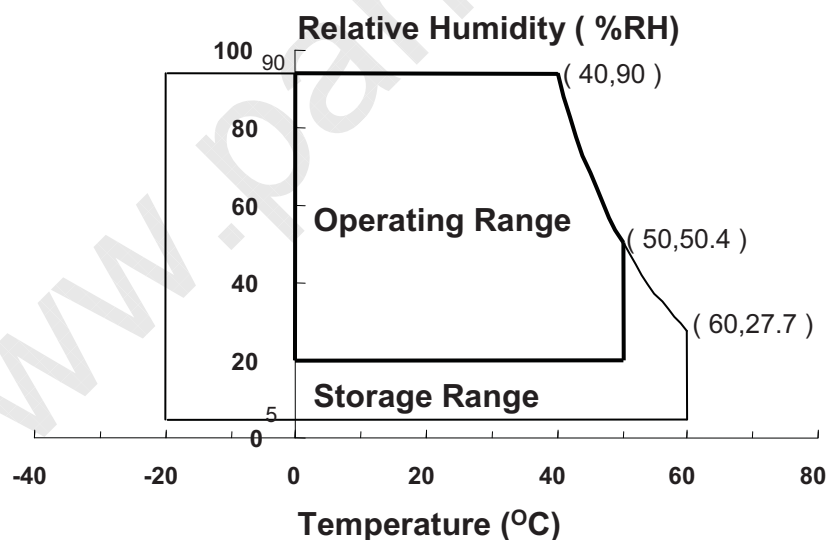

(2) 2ms, half sine wave, one time for $\pm X$, $\pm Y$, $\pm Z$.

(3) 5 - 500 Hz, random vibration, 30min for X, Y, Z.

(4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

Samsung Secret

Doc.No.	LTN154BT08-R06	Rev.No	04-A00-S-090612	Page	5 / 31
---------	----------------	--------	-----------------	------	--------

Approval

1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD MODULE

 $V_{cc} = 3.3V$, $V_{SS} = GND = 0V$

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{dd}	$V_{dd} - 0.3$	$V_{dd} + 0.3$	V	(1)
Logic Input Voltage	V_{dd}	$V_{dd} - 0.3$	$V_{dd} + 0.3$	V	(1)

Note (1) Within T_a ($25 \pm 2^\circ C$)

(2) BACK-LIGHT UNIT

 $T_a = 25 \pm 2^\circ C$

Item	Symbol	Min.	Max.	Unit	Note
LED Current	I_L	-	22.5	mA	(1)
LED Voltage	V_L	2.8	3.6	V	(1)

Note 1) Permanent damage to the device may occur if maximum values are exceeded

Functional operation should be restricted to the conditions described under normal operating conditions.

Samsung Secret

Approval

2. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5).
Measuring equipment : SR-3


* Ta = 25 ± 2 °C, V_{CC}=3.3V, f_V= 60Hz, f_{DCLK} = 88.75MHz, I_L = 20mA

Item		Symbol	Condition	Min.	Typ.	Max	Unit	Note
Contrast Ratio (4 Points)		CR	Normal Viewing Angle $\phi = 0$ $\theta = 0$	600	800	-	-	(1), (2), (5)
Response Time at Ta (Rising + Falling)		T _{RT}		-	16	20	msec	(1),(3)
Average Luminance of White (4 Points)		Y _{L,AVE}		300	330	-	cd/m ²	I _L =20mA (1),(4)
Color Chromaticity (CIE)	Red	R _X		0.620	0.640	0.660	-	(1), (5)
		R _Y		0.315	0.335	0.355		
	Green	G _X		0.290	0.310	0.330		
		G _Y		0.590	0.610	0.630		
	Blue	B _X		0.130	0.150	0.170		
		B _Y		0.040	0.060	0.080		
	White	W _X		0.297	0.313	0.329		
		W _Y	0.313	0.329	0.345			
Viewing Angle	Hor.	θ_L	CR ≥ 10	70	80	-	Degrees	
		θ_H		70	80	-		
	Ver.	ϕ_H		60	70	-		
		ϕ_L		70	80	-		
160 Points White Variation		δ_L		60	75	-	-	(6)

Samsung Secret

Note 1) Definition of Viewing Angle : Viewing angle range($10 \leq C/R$, $100 \leq C/R$)

Approval

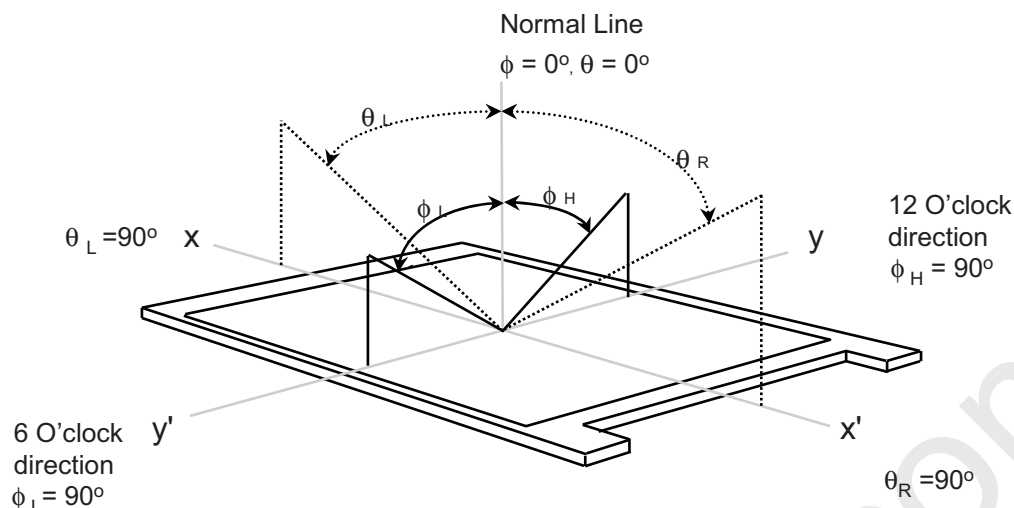


Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at center point

$$CR = \text{Luminance at Gmax} / \text{Luminance at Gmin}$$

{ Average contrast value at point # 72, 73, 88, 89 } ,

Test points are figured out at Note 4).

Note 3) Definition of Response time :

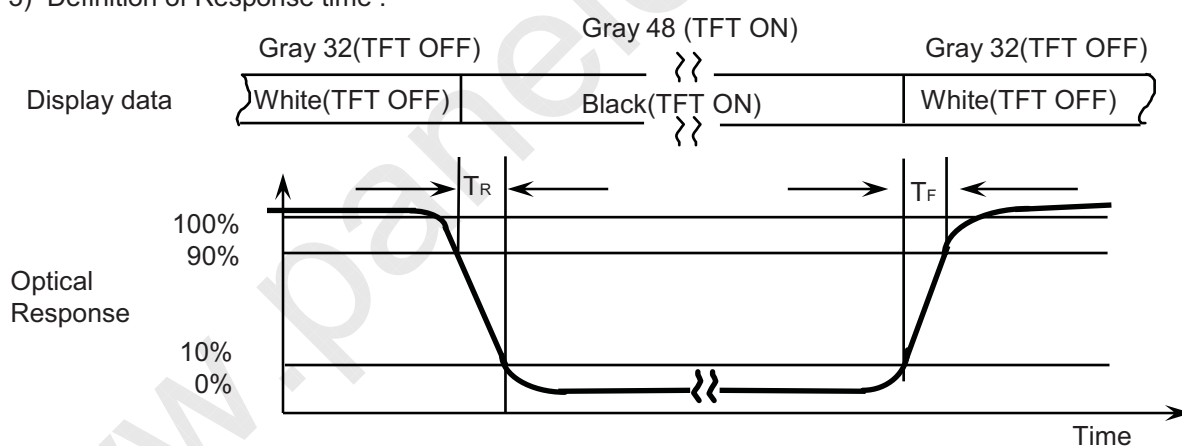


Note 4) Definition of Average Luminance of White

: measure the luminance of white at center 4 points out of 160 points .

Average Luminance of White ($Y_{L,Ave}$)

$$Y_{L,Ave} = \frac{Y_{L72} + Y_{L73} + Y_{L88} + Y_{L89}}{4}$$

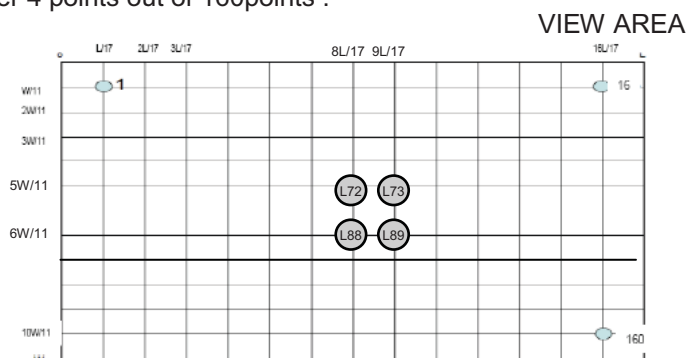


○ : test point

Samsung Secret

Approval

Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. 30 min after lighting the backlight. This should be measured in the center of screen.
 Lamp current : 6.0mA (Inverter : SIC-130T)
 Environment condition : $T_a = 25 \pm 2 ^\circ \text{C}$

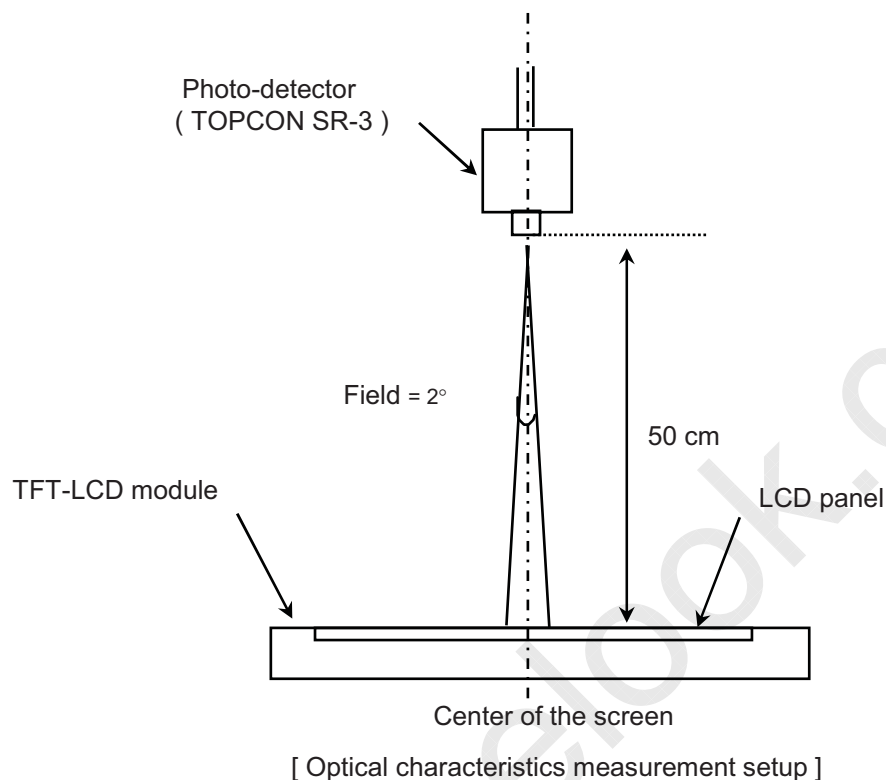


Note 6) Definition of 160 points white variation (δL), CR variation(C_{VER}) [① ~ ①60]

$$\delta L = 100\% - (L_{\max} - L_{\min}) / L_{\max}$$

Where, $L_{\max} = \max \{ \text{Luminance values at 160 points} \}$,

$L_{\min} = \min \{ \text{Luminance values at 160 points} \}$

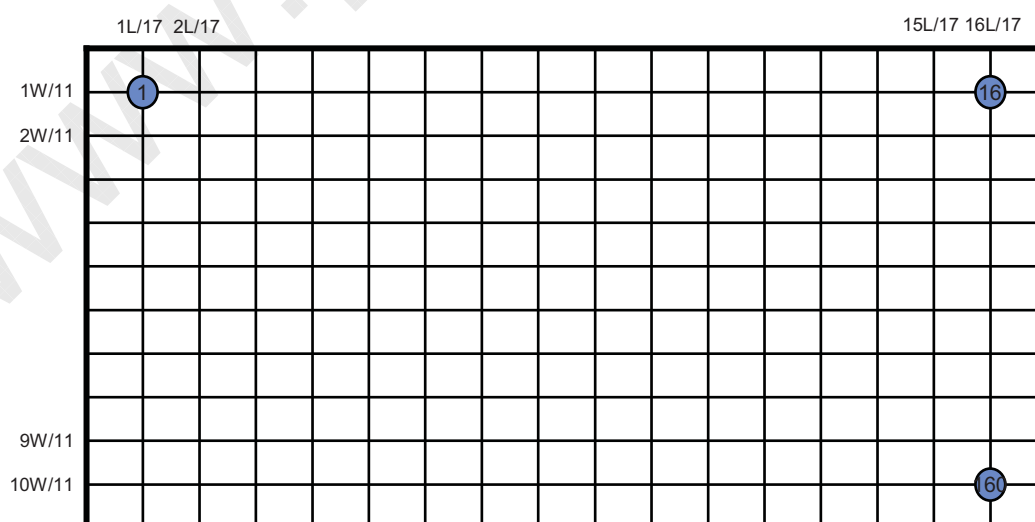

Samsung Secret

Doc.No. LTN154BT08-R06

Rev.No

04-A00-S-090612

Page

9 / 31

3. ELECTRICAL CHARACTERISTICS

Approval

3.1 TFT LCD MODULE

Ta= 25 ± 2°C


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V _{DD}	3.0	3.3	3.6	V	
Differential Input Voltage for LVDS Receiver Threshold	High	V _{IH}	-	-	+100	mV	V _{CM} = +1.2V
	Low	V _{IL}	-100	-	-	mV	
Vsync Frequency		f _v	-	60	-	Hz	
Hsync Frequency		f _H	-	54.67	-	KHz	
Main Frequency		f _{DCLK}	-	88.75	-	MHz	
Rush Current		I _{RUSH}	-	-	1.5	A	(4)
Current of Power Supply	White	I _{DD}	250	275	300	mA	(2),(3)*a
	Black		300	330	360	mA	-
	Mosaic		270	300	330	mA	(2),(3)*b
	V. Stripe		330	360	390	mA	(2),(3)*c

Note (1) Display data pins and timing signal pins should be connected.(GND = 0V)


(2) f_v = 60Hz, f_{DCLK} = 88.75MHZ, V_{DD} = 3.3V , DC Current.

(3) Power dissipation pattern

*a) White Pattern

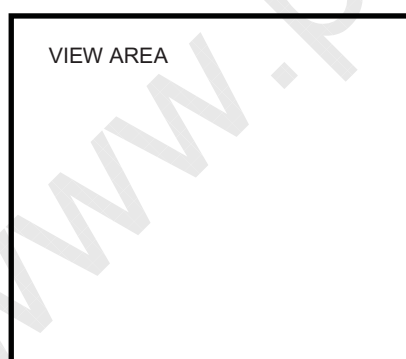

*b) Mosaic Pattern

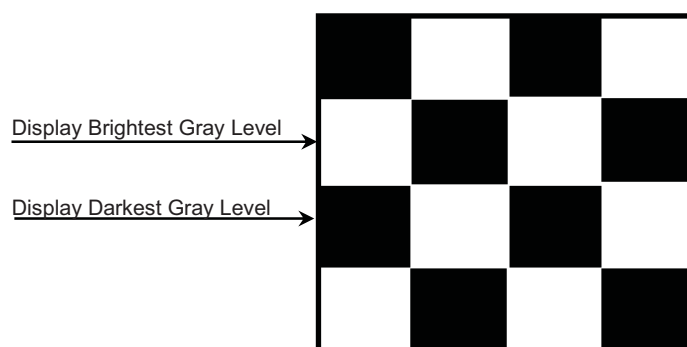

Samsung Secret

Doc.No. LTN154BT08-R06

Rev.No


04-A00-S-090612

Page


10 / 31

Approval


*c) 1dot Vertical stripe pattern

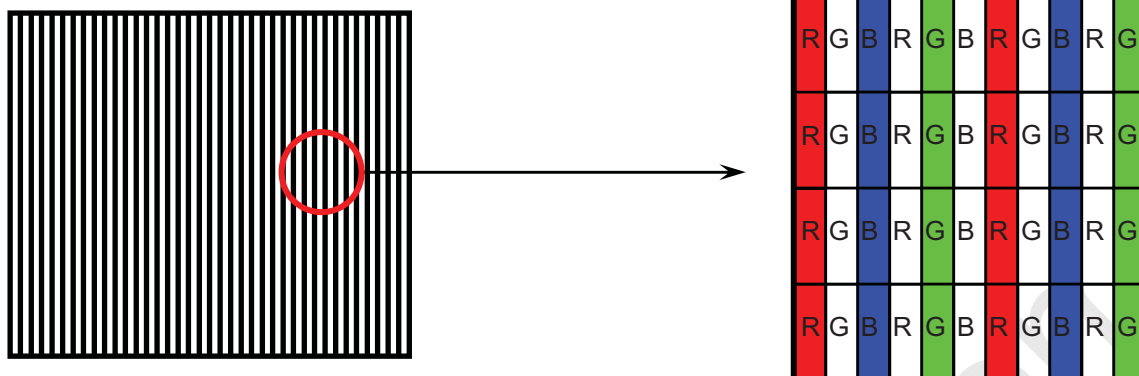

4) Rush current measurement condition

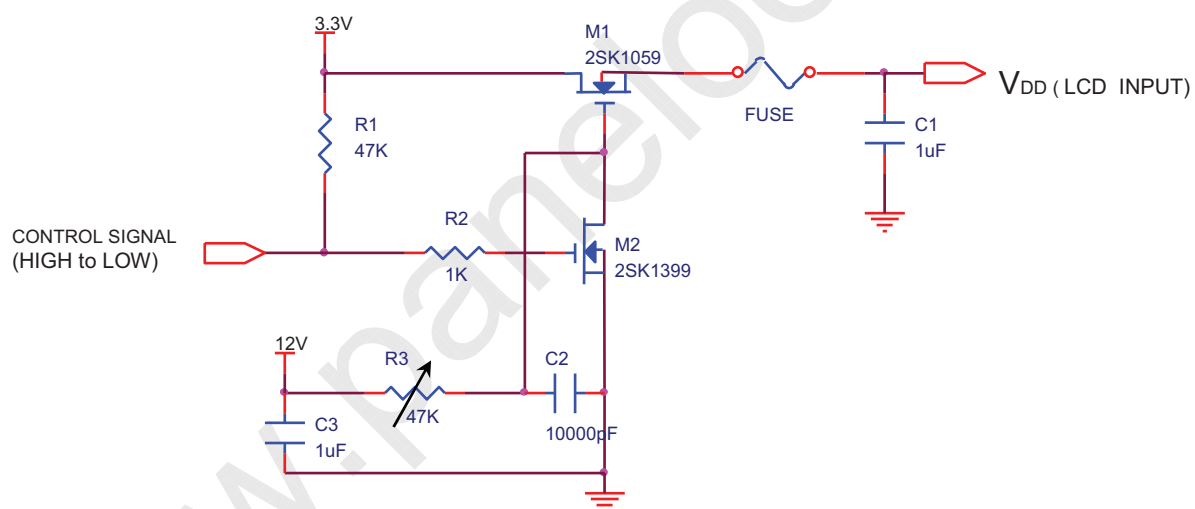

V_{DD} rising time is 470us

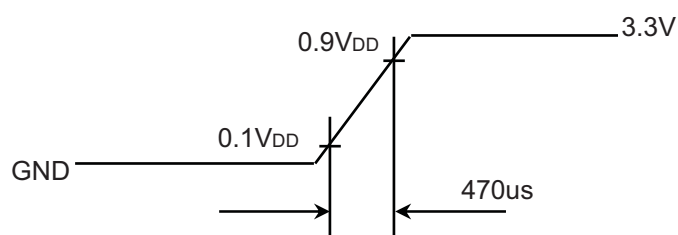

Samsung Secret

Approval

3.2 BACK-LIGHT UNIT

Ta= 25 ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED Forward Current	IF	-	20	-	mA	
LED Forward Voltage	VF	2.8	-	3.0	V	
LED Array Voltage	VP	-	-	33	V	Vf X 11 LEDs
Power Consumption	P	-	-	39.6	W	If X Vf X 66 LEDs

3.2 LED Connection

String	LED 1	LED 2	LED 3	LED 4	LED 5	LED 6	LED 7	LED 8	LED 9	LED 10	LED 11
1	1	7	13	19	25	31	37	43	49	55	61
2	2	8	14	20	26	32	38	44	50	56	62
3	3	9	15	21	27	33	39	45	51	57	63
4	4	10	16	22	28	34	40	46	52	58	64
5	5	11	17	23	29	35	41	47	53	59	65
6	6	12	18	24	30	36	42	48	54	60	66

3.3 BLU Connection


- Refer to the pin assignment (pin 31~40pin)

Samsung Secret


Approval

4. BLOCK DIAGRAM

4.1 TFT LCD Module

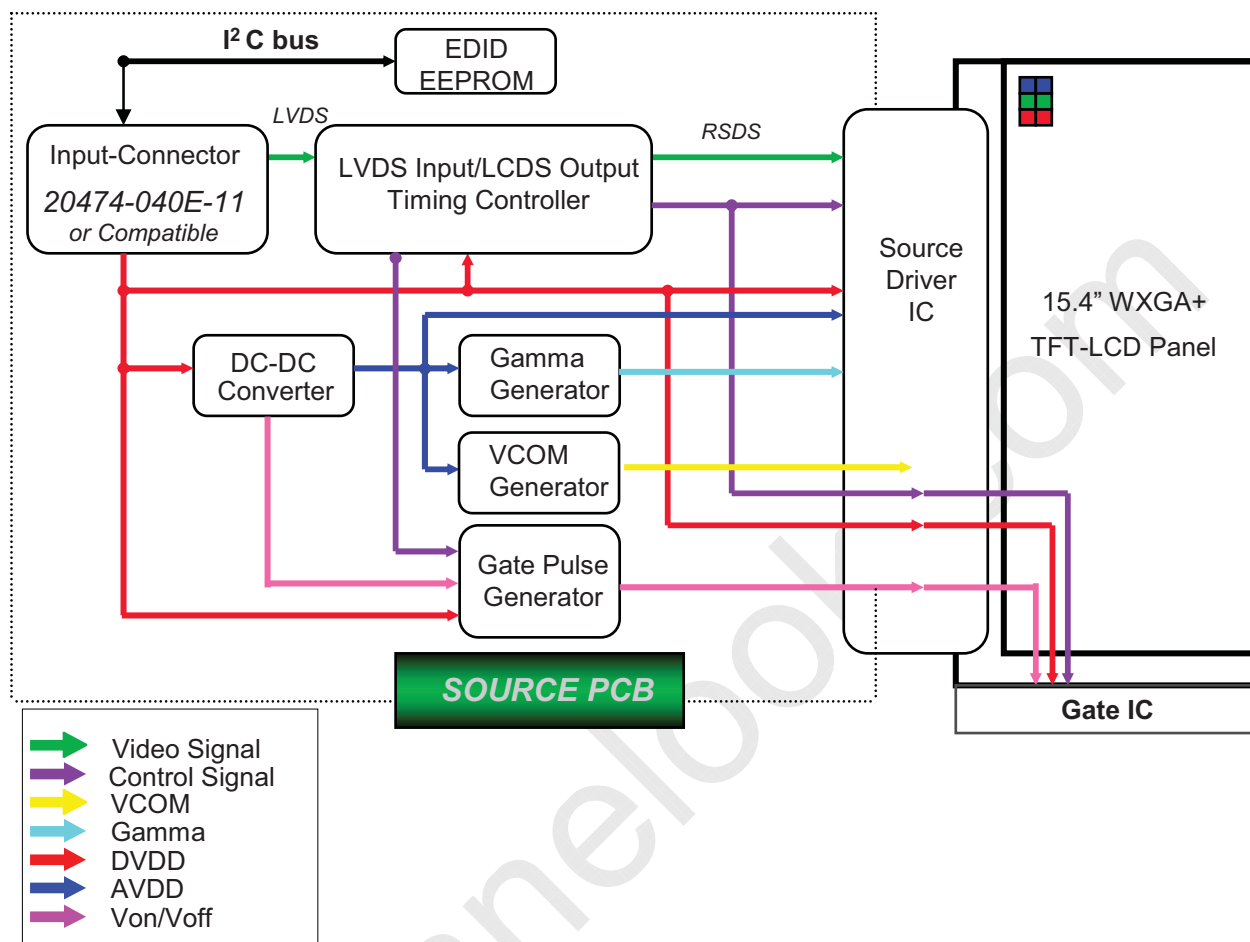

4.2 Back light Unit (LED)

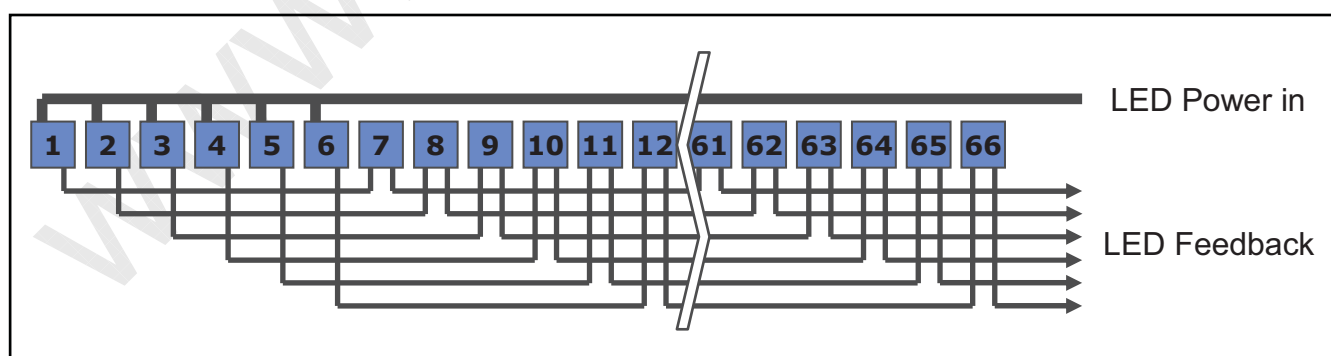

Samsung Secret



Approval

5. INPUT TERMINAL PIN ASSIGNMENT

5.1. Input Signal & Power LVDS, Connector : (IPEX, 20474-040E-11 or Compatible)
Mating Connector

No.	Symbol	Function	Polarity	Remarks
1	VSS	Ground		
2	VDD	POWER SUPPLY +3.3V		
3	VDD	POWER SUPPLY +3.3V		
4	VEEDID	DDC 3.3V Power		
5	Vsync	STV out		
6	CLKEDID	DDC Clock		
7	DATAEDID	DDC data		
8	O_RxIN0-	LVDS Differential Data INPUT (Odd R0-R5,G0)	Negative	
9	O_RxIN0+	LVDS Differential Data INPUT (Odd R0-R5,G0)	Positive	
10	GND	Ground		
11	O_RxIN1-	LVDS Differential Data INPUT (Odd G1-G5,B0-B1)	Negative	
12	O_RxIN1+	LVDS Differential Data INPUT (Odd G1-G5,B0-B1)	Positive	
13	GND	Ground		
14	O_RxIN2-	LVDS Differential Data INPUT (Odd B2-B5,Sync,DE)	Negative	
15	O_RxIN2+	LVDS Differential Data INPUT (Odd B2-B5,Sync,DE)	Positive	
16	GND	Ground		
17	O_RxCLK-	LVDS Differential Data INPUT (Odd Clock)	Negative	
18	O_RxCLK+	LVDS Differential Data INPUT (Odd Clock)	Positive	
19	GND	Ground		
20	E_RxIN0-	LVDS Differential Data INPUT (Even R0-R5,G0)	Negative	
21	E_RxIN0+	LVDS Differential Data INPUT (Even R0-R5,G0)	Positive	
22	GND	Ground		
23	E_RxIN1-	LVDS Differential Data INPUT (Even G1-G5,B0-B1)	Negative	
24	E_RxIN1+	LVDS Differential Data INPUT (Even G1-G5,B0-B1)	Positive	
25	GND	Ground		
26	E_RxIN2-	LVDS Differential Data INPUT (Even B2-B5,Sync,DE)	Negative	
27	E_RxIN2+	LVDS Differential Data INPUT (Even B2-B5,Sync,DE)	Positive	
28	GND	Ground		
29	E_RxCLK-	LVDS Differential Data INPUT (Even Clock)	Negative	
30	E_RxCLK+	LVDS Differential Data INPUT (Even Clock)	Positive	

Samsung Secret



Approval

5. INPUT TERMINAL PIN ASSIGNMENT

5.1. Input Signal & Power LVDS, Connector : (IPEX, 20474-040E-11 or Compatible)
Mating Connector

No.	Symbol	Function	Polarity	Remarks
31	Vdc1	LED Cathode (Negative)		
32	Vdc2	LED Cathode (Negative)		
33	Vdc3	LED Cathode (Negative)		
34	Vdc4	LED Cathode (Negative)		
35	Vdc5	LED Cathode (Negative)		
36	Vdc6	LED Cathode (Negative)		
37	NC	NC		
38	Vdc (1~6)	LED Anode (Negative)		
39	Vdc (1~6)	LED Anode (Negative)		
40	Vdc (1~6)	LED Anode (Negative)		

Samsung Secret

Approval

5.2 LVDS Interface : Transmitter DS90CF365 or Compatible

LVDS for Odd pixel


Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
44	TxIN0	RO0	12	TxIN11	GO5
45	TxIN1	RO1	13	TxIN12	BO0
47	TxIN2	RO2	15	TxIN13	BO1
48	TxIN3	RO3	16	TxIN14	BO2
1	TxIN4	RO4	18	TxIN15	BO3
3	TxIN5	RO5	19	TxIN16	BO4
4	TxIN6	GO0	20	TxIN17	BO5
6	TxIN7	GO1	22	TxIN18	Hsync
7	TxIN8	GO2	23	TxIN19	Vsync
9	TxIN9	GO3	25	TxIN20	DE
10	TxIN10	GO4	26	TxCLK IN	Clock

LVDS for Even pixel

Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
44	TxIN0	RE0	12	TxIN11	GE5
45	TxIN1	RE1	13	TxIN12	BE0
47	TxIN2	RE2	15	TxIN13	BE1
48	TxIN3	RE3	16	TxIN14	BE2
1	TxIN4	RE4	18	TxIN15	BE3
3	TxIN5	RE5	19	TxIN16	BE4
4	TxIN6	GE0	20	TxIN17	BE5
6	TxIN7	GE1	22	TxIN18	N/C
7	TxIN8	GE2	23	TxIN19	N/C
9	TxIN9	GE3	25	TxIN20	N/C
10	TxIN10	GE4	26	TxCLK IN	Clock

Samsung Secret

Approval

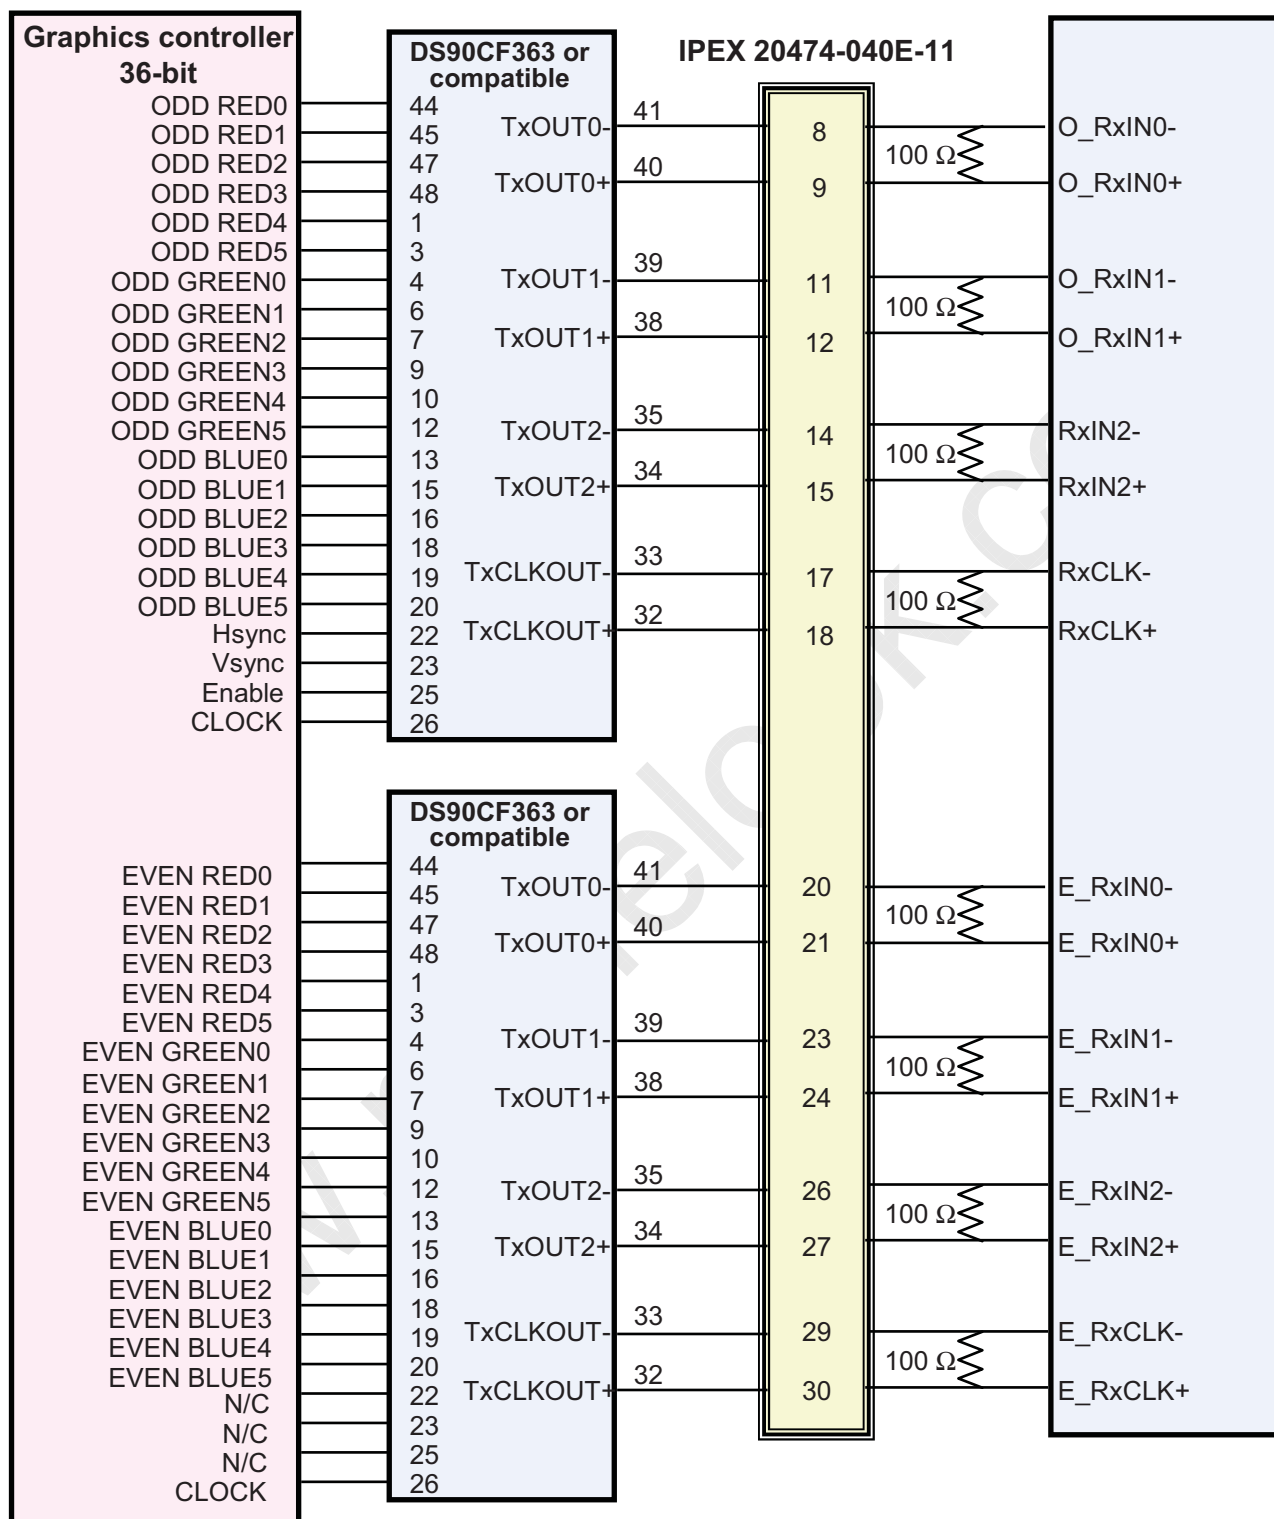LVDS Interface

Note : The LCD Module uses a 100ohm resistor between positive and negative lines of each receiver input.

Samsung Secret**Doc.No.** LTN154BT08-R06**Rev.No**

04-A00-S-090612


Page

17 / 31

Approval

5.4 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-CON

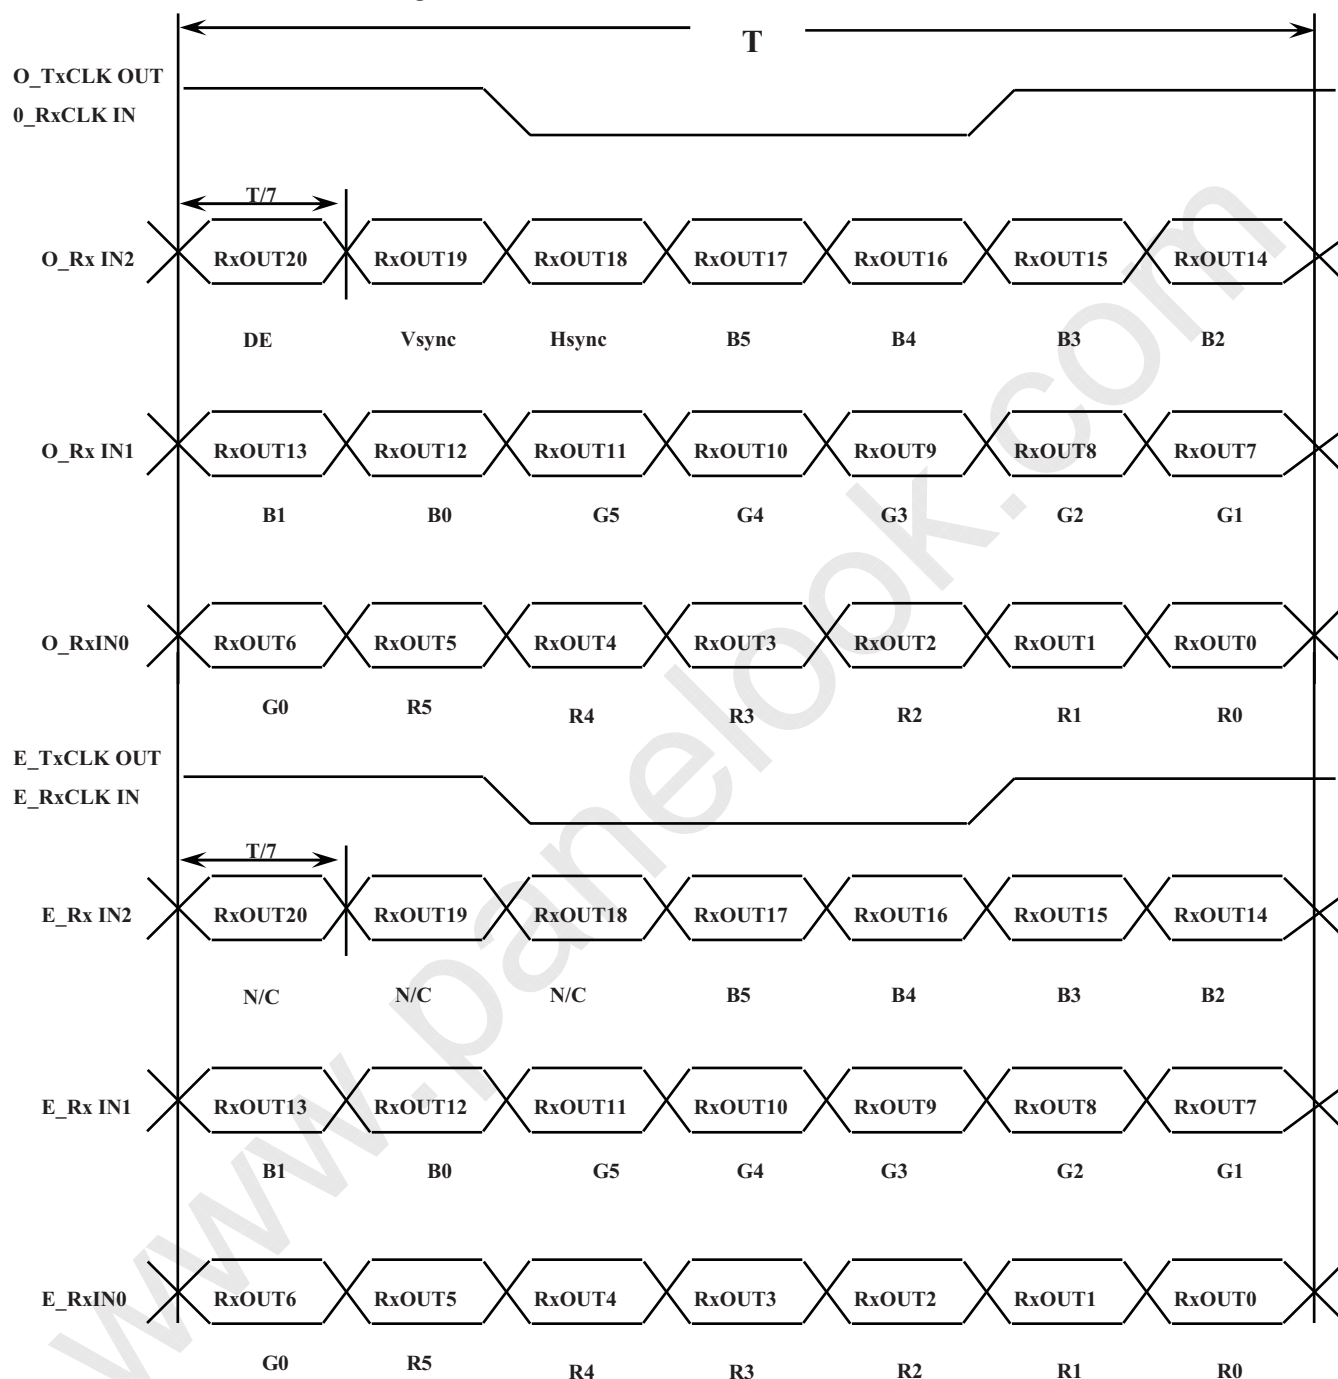

Samsung Secret

Approval

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

Color	Display	Data Signal																		Gray Scale Level
		Red						Green						Blue						
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0	
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	-
	Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	-
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	-
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	-
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1	-
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	-
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
Gray Scale Of Red	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	↑	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	R1
	:	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	:	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	R61
	↓	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	R62
	Bright	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R63
Gray Scale Of Green	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	↑	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	G1
	:	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	G2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	:	0	0	0	0	0	0	0	1	1	1	0	1	0	0	0	0	0	0	G61
	↓	0	0	0	0	0	0	0	1	1	1	1	0	0	0	0	0	0	0	G62
	Bright	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	G63
Gray Scale Of Blue	Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	B1
	:	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	B2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	:	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1	B61
	↓	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B62
	Bright	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B63

Note 1) Definition of gray :


Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)

Note 2) Input signal: 0 =Low level voltage, 1=High level voltage

Samsung Secret

Approval

5.6 Pixel Format in the display

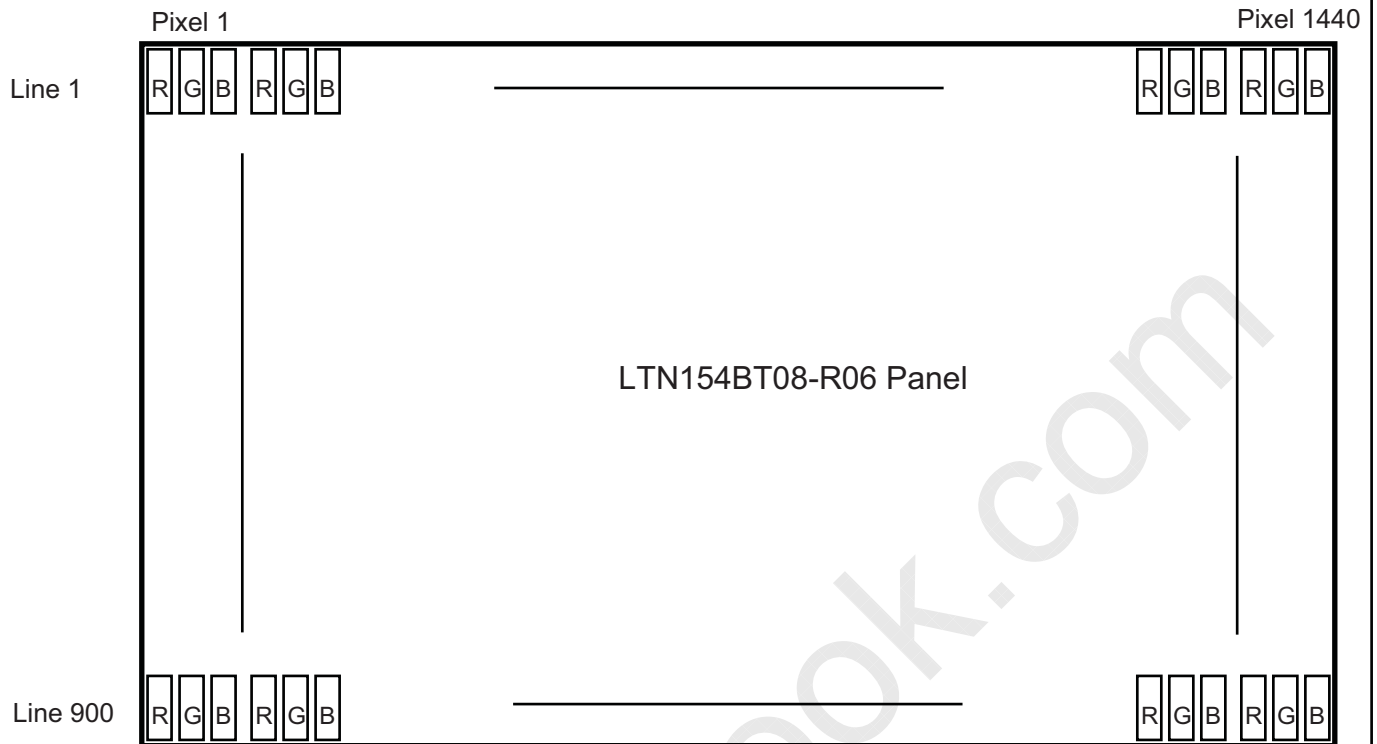

Samsung Secret


Approval

6. INTERFACE TIMING

6.1 Timing Parameters

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frame Frequency	Cycle	TV	-	926	-	Lines	-
Vertical Active Display Term	Display Period	TVD	-	900	-	Lines	-
One Line Scanning Time	Cycle	TH	-	1600	-	Clocks	-
Horizontal Active Display Term	Display Period	THD	-	1440	-	Clocks	-

6.2 Timing diagrams of interface signal

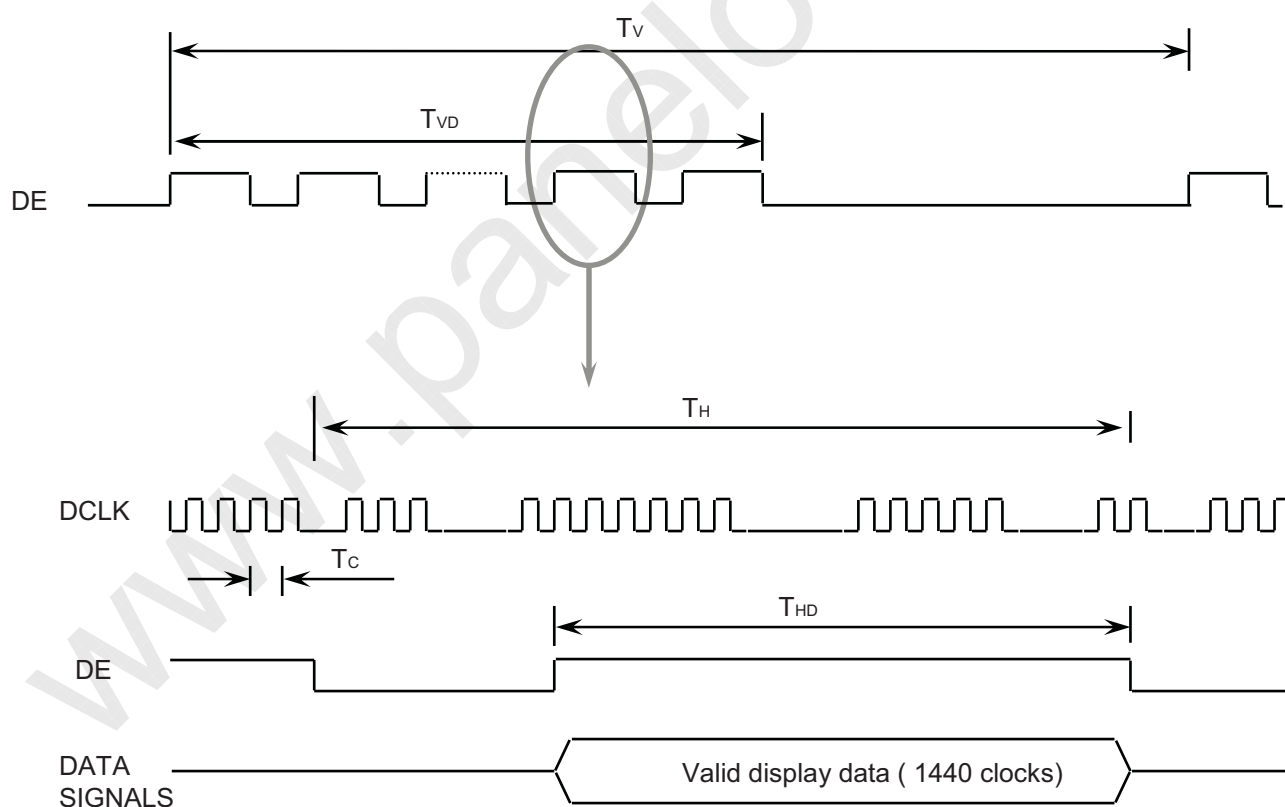


Samsung Secret

6.3 Power ON/OFF Sequence

Approval

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

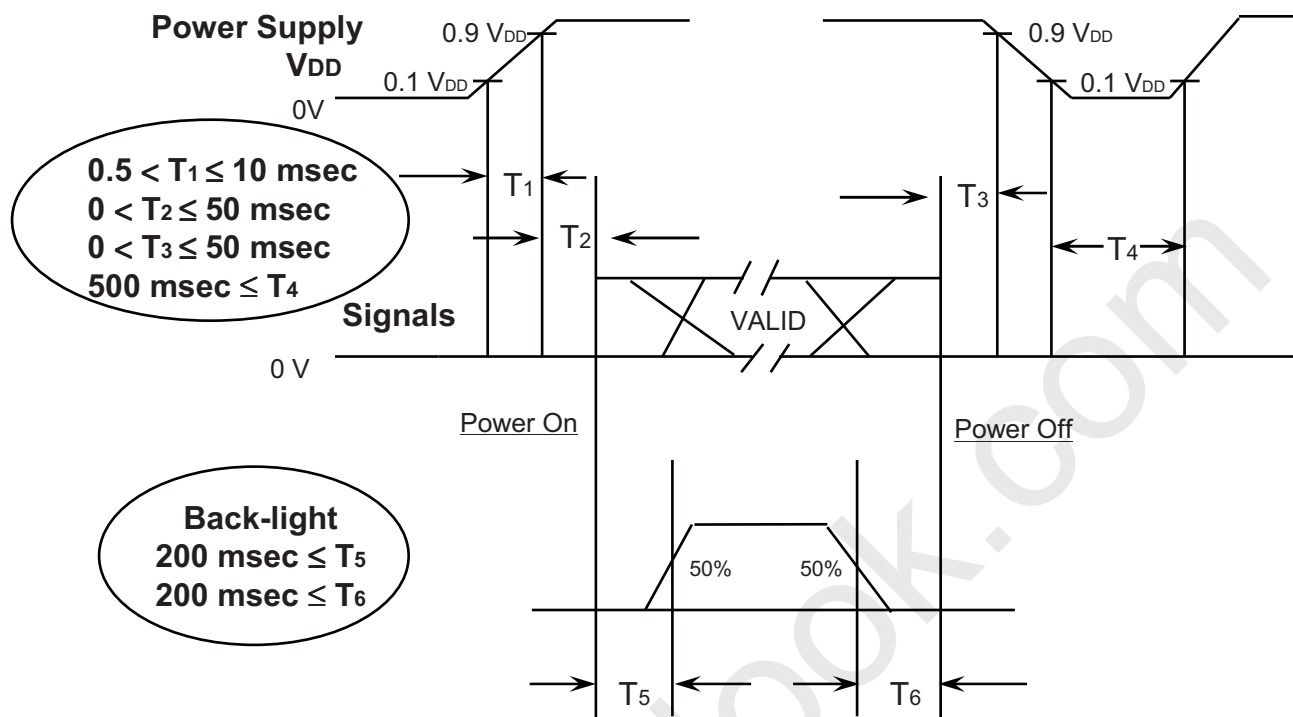

Power ON/OFF Sequence

- T1 : Vdd rising time from 10% to 90%
- T2 : The time from Vdd to valid data at power ON.
- T3 : The time from valid data off to Vdd off at power Off.
- T4 : Vdd off time for Windows restart
- T5 : The time from valid data to B/L enable at power ON.
- T6 : The time from valid data off to B/L disable at power Off.

NOTE.


- (1) The supply voltage of the external system for the module input should be the same as the definition of VDD.
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of VDD = off level, please keep the level of input signals on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.


Samsung Secret

Doc.No.	LTN154BT08-R06	Rev.No	04-A00-S-090612	Page	22 / 31
---------	----------------	--------	-----------------	------	---------

4

☐ 16 NO LIGHT LEAKAGE ALLOWED AROUND THE POLARIZER EDGE.

UG GENERATED







8. GENERAL PRECAUTIONS

Approval

1. Handling

- (a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module and CCFT back-light.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA (Isoprophyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static , it may cause damage to the C-MOS Gate Array IC.
- (i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Do not pull or fold the lamp wire.
- (l) Do not adjust the variable resistor which is located on the back side.
- (m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector shall not be touched directly with bare hands.

Samsung Secret

Doc.No.	LTN154BT08-R06	Rev.No	04-A00-S-090612	Page	27 / 31
---------	----------------	--------	-----------------	------	---------

2. STORAGE

Approval

- (a) Do not leave the module in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module in direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

3. OPERATION

- (a) Do not connect,disconnect the module in the “ Power On” condition.
- (b) Power supply should always be turned on/off by following item 6.3
“ Power on/off sequence “.
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back-light connector and its inverter power supply shall be a minimized length and be connected directly . The longer cable between the back-light and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage (Vs).
- (e) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

4. OTHERS

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on)
Otherwise the module may be damaged.
- (d) If the module displays the same pattern continuously for a long period of time,it can be the situation when the image “sticks” to the screen.
- (e) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

Samsung Secret

Doc.No.	LTN154BT08-R06	Rev.No	04-A00-S-090612	Page	28 / 31
---------	----------------	--------	-----------------	------	---------



Approval

EDID Table (LTN154BT08-R06)

2009.6.12

Address (Decimal)	Address (HEX)	Field Name & Comments	Value (HEX)	Value (BIN)	Value (DEC)
0	0	Header	00	00000000	0
1	1		FF	11111111	255
2	2		FF	11111111	255
3	3		FF	11111111	255
4	4		FF	11111111	255
5	5		FF	11111111	255
6	6		FF	11111111	255
7	7		00	00000000	0
8	8	EISA Manuf. Code LSB (3 character ID = APP)	06	00000110	6
9	9	Compressed ASCII	10	00010000	16
10	0A	Product Code = A4	A4	10100100	164
11	0B	hex, LSB first = 9C	9C	10011100	156
12	0C	32-bit serial #	00	00000000	0
13	0D		00	00000000	0
14	0E		00	00000000	0
15	0F		00	00000000	0
16	10	Week of manufacture (week 22)	16	00010110	22
17	11	Year of manufacture (2009)	13	00010011	19
18	12	EDID Structure Ver # = 1	01	00000001	1
19	13	EDID revision # = 3	03	00000011	3
20	14	Video input definition = Digital input, Non TMDS CRGB	80	10000000	128
21	15	Max H image size = 33 Cm	21	00100001	33
22	16	Max V image size = 21 Cm	15	00010101	21
23	17	Display Gamma = 2.2	78	01111000	120
24	18	Feature support (DPMS) = Active off, RGB color	0A	00001010	10
25	19	Red/green low bits	E5	11100101	229
26	1A	Blue/white low bits	85	10000101	133
27	1B	Red x , Red x = 0.640	A3	10100011	163
28	1C	Red y , Red y = 0.330	54	01010100	84
29	1D	Green x , Green x = 0.310	4F	01001111	79
30	1E	Green y , Green y = 0.610	9C	10011100	156
31	1F	Blue x , Blue x = 0.150	26	00100110	38
32	20	Blue y , Blue y = 0.05	0E	00001110	14
33	21	White x , White x = 0.313	50	01010000	80
34	22	White y , White y = 0.329	54	01010100	84
35	23	Established timing 1	00	00000000	0
36	24	Established timing 2	00	00000000	0
37	25	Manufacturer's timings	00	00000000	0
38	26	Standard timing #1 was not used	01	00000001	1
39	27		01	00000001	1
40	28	Standard timing #2 was not used	01	00000001	1
41	29		01	00000001	1
42	2A	Standard timing #3 was not used	01	00000001	1
43	2B		01	00000001	1
44	2C	Standard timing #4 was not used	01	00000001	1
45	2D		01	00000001	1
46	2E	Standard timing #5 was not used	01	00000001	1
47	2F		01	00000001	1
48	30	Standard timing #6 was not used	01	00000001	1
49	31		01	00000001	1
50	32	Standard timing #7 was not used	01	00000001	1
51	33		01	00000001	1
52	34	Standard timing #8 was not used	01	00000001	1
53	35		01	00000001	1

Samsung Secret



Approval

Address (Decimal)	Address (HEX)	Field Name & Comments	Value (HEX)	Value (BIN)	Value (DEC)
54	36	Detailed timing/monitor	AB	10101011	171
55	37	1440x900 : Pixel Clock = 88.75 MHz	22	00100010	34
56	38	Hor active=1440 pixels	A0	10100000	160
57	39	Hor blanking=160 pixels	A0	10100000	160
58	3A		50	01010000	80
59	3B	Vertical active=900 lines	84	10000100	132
60	3C	Vertical blanking=26lines	1A	00011010	26
61	3D		30	00110000	48
62	3E	H sync. Offset=48 pixels	30	00110000	48
63	3F	H sync. Width=32 pixels	20	00100000	32
64	40	V sync. Offset=3 lines	36	00110110	54
65	41	V sync. Width=6 lines	00	00000000	0
66	42	H image size= 331 mm	4B	01001011	75
67	43	V image size = 207 mm	CF	11001111	207
68	44		10	00010000	16
69	45	No Horizontal Border	00	00000000	0
70	46	No Vertical Border	00	00000000	0
71	47	Non-interlaced, Normal display, No stereo, Digital separate sync, H/V pol Negatives	19	00011001	25
72	48	Detailed timing/monitor	00	00000000	0
73	49	descriptor #3	00	00000000	0
74	4A		00	00000000	0
75	4B		01	00000001	1
76	4C	Version	00	00000000	0
77	4D	Apple edid signature	06	00000110	6
78	4E	Apple edid signature	10	00010000	16
79	4F	Link Type (LVDS Link,MSB justified)	30	00110000	48
80	50	Pixel and link component format (6-bit panel interface)	00	00000000	0
81	51	Panel features (No inverter)	00	00000000	0
82	52		00	00000000	0
83	53		00	00000000	0
84	54		00	00000000	0
85	55		00	00000000	0
86	56		00	00000000	0
87	57		00	00000000	0
88	58		0A	00001010	10
89	59		20	00100000	32
90	5A	Detailed timing/monitor	00	00000000	0
91	5B	descriptor #3	00	00000000	0
92	5C	LTN154BT08-R06	00	00000000	0
93	5D		FE	11111110	254
94	5E		00	00000000	0
95	5F	L	4C	01001100	76
96	60	T	54	01010100	84
97	61	N	4E	01001110	78
98	62	1	31	00110001	49
99	63	5	35	00110101	53
100	64	4	34	00110100	52
101	65	B	42	01000010	66
102	66	T	54	01010100	84
103	67	0	30	00110000	48
104	68	8	38	00111000	56
105	69		00	00000000	0
106	6A		0A	00001010	10
107	6B		20	00100000	32

Samsung Secret

Doc.No.	LTN154BT08-R06	Rev.No	04-A00-S-090612	Page	30 / 31
---------	----------------	--------	-----------------	------	---------



Approval

EDID Table (LTN154BT08-R06)

2009.6.12

Address (Decimal)	Address (HEX)	Field Name & Comments	Value (HEX)	Value (BIN)	Value (DEC)
108	6C	Detailed timing/monitor	00	00000000	0
109	6D	descriptor #4	00	00000000	0
110	6E	Color LCD	00	00000000	0
111	6F		FC	11111100	252
112	70		00	00000000	0
113	71	C	43	01000011	67
114	72	o	6F	01101111	111
115	73	l	6C	01101100	108
116	74	o	6F	01101111	111
117	75	r	72	01110010	114
118	76	space	20	00100000	32
119	77	L	4C	01001100	76
120	78	C	43	01000011	67
121	79	D	44	01000100	68
122	7A		0A	00001010	10
123	7B		20	00100000	32
124	7C		20	00100000	32
125	7D		20	00100000	32
126	7E	Extension Flag = 00	00	00000000	0
127	7F	Checksum	AC	10101100	172

Samsung Secret