

Матрицы для ноутбуков производства Samsung Electronics

Экраны для ноутбуков Samsung популярны в портативных компьютерах различных производителей, в частности Acer, Dell, Fujitsu-Siemens, IBM Lenovo, Asus, LG, Toshiba. И не удивительно, так как Samsung Electronics является мировым лидером по производству жидкокристаллических дисплеев. Матрицы Samsung Electronics характеризуются стабильным качеством, незаурядными характеристиками и неограниченным ассортиментом, который охватывает практически весь рынок ноутбуков, нетбуков и планшетов. Матрицы для ноутбуков Samsung не являются оптимальными по финансовым соображениям, некоторые модели имеют довольно высокую стоимость. Но этот момент касается в основном только тех случаев, когда нет аналогов других производителей. В остальном же экраны Samsung являются отличным выбором для потребителей.

Интернет-магазин Notebook-LCD занимается прямыми поставками матриц Samsung Electronics в Россию, а также других производителей ЖК-панелей для ноутбуков. Наличие большого постоянно пополняющего склада дисплеев всех типов для ноутбуков, нетбуков и электронных книг. Доставка матриц для ноутбуков осуществляется по всей России. Форма оплаты: наличными в офисе или курьеру при доставке по Москве, безналичный расчет (цена не меняется, НДС включен), прямой банковский перевод либо перевод по системе денежных переводов, пополнение карты VISA, WebMoney, ЯндексДеньги, а также наложенный платеж (оплата при получении курьеру EMS).

Для сервисных центров и предпринимателей, занимающихся ремонтом ноутбуков, нетбуков и электронных книг действуют специальные цены. Для оптовых покупателей предоставляются оптовые цены. Для постоянных клиентов у нас действует система накопительных скидок. Ознакомится с условиями приобретения матриц для ноутбуков по специальным или оптовым ценам можно обратившись к менеджерам Notebook-LCD по контактам, представленным ниже.

Купить матрицу LTN156AT02-D или её полный аналог Вы можете в нашем офисе либо оформив заказ на странице <http://www.notebook-lcd.ru/ru/partnumbers/samsung/LTN156AT02-D>

Также Вы можете зарезервировать комплектующие, сделать заказ либо проконсультироваться с нашими менеджерами по подбору аналога для данной матрицы либо соответствия её модели Вашего ноутбука.

Сервис по ремонту и склад матриц для ноутбуков и других запчастей для ноутбуков, КПК и электронных книг находится по адресу Варшавское шоссе, д.75, корпус 2 (ст. м. «Варшавская»).

Контакты:

Телефон: +79015534828, (495)973-48-28

Электронная почта: zakaz@notebook-lcd.ru

Skype: www.notebook-lcd.ru

ICQ: 2666355

Схема проезда: <http://www.notebook-lcd.ru/i/map.jpg>

Координаты для владельцев GPS-навигаторов:

N 55° 39.3700

E 037° 37.2316

График работы:

Пн-Пт: 9:00-19:00

Сб: 12:00-17:00

Вск: 12:00-17:00

SAMSUNG

ELECTRONICS

Approval



TO :

DATE : December. 5. 2008

SAMSUNG TFT-LCD

MODEL NO : LTN156AT02-D

NOTE : Extension code [-D]
→ LTN156AT02-D
Surface type [Glare, True life]

The information described in this SPEC is preliminary and can be changed without prior notice.

APPROVED BY :

K. H. Shin

PREPARED BY : LCD Application Engineering Part (Mobile)

SAMSUNG ELECTRONICS CO., LTD.



Samsung Secret

| | | | | | |
|---------|--------------|--------|-----------------|------|--------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 1 / 30 |
|---------|--------------|--------|-----------------|------|--------|

Approval

CONTENTS

| | |
|---|--------------|
| Revision History | ----- (3) |
| General Description | ----- (4) |
| 1. Absolute Maximum Ratings | ----- (5) |
| 1.1 Absolute Ratings of environment | |
| 1.2 Electrical Absolute Ratings | |
| 2. Optical Characteristics | ----- (7) |
| 3. Electrical Characteristics | ----- (10) |
| 3.1 TFT LCD Module | |
| 3.2 Backlight Unit | |
| 3.3 LED Driver | |
| 4. Block Diagram | ----- (13) |
| 4.1 TFT LCD Module | |
| 5. Input Terminal Pin Assignment | ----- (14) |
| 5.1 Input Signal & Power | |
| 5.2 LVDS Interface | |
| 5.3 Timing Diagrams of LVDS For Transmitting | |
| 5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color. | |
| 5.5 Pixel format | |
| 6. Interface Timing | ----- (19) |
| 6.1 Timing Parameters | |
| 6.2 Timing Diagrams of interface Signal | |
| 6.3 Power ON/OFF Sequence | |
| 7. Outline Dimension | ----- (21) |
| 8. Packing | ----- (22) |
| 9. Markings & Others | ----- (23) |
| 10. General Precautions | ----- (25) |
| 11. EDID | ----- (28) |

Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|--------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 2 / 30 |
|----------------|--------------|---------------|-----------------|-------------|--------|

REVISION HISTORY

Approval

| Date | Revision No. | Page | Summary |
|---------------|--------------|------|--|
| Aug. 4. 2008 | P00 | All | LTN156AT02-D model spec was issued first. |
| Aug. 6. 2008 | P01 | All | LTN156AT02-D model spec was updated based on DELL spec |
| Nov. 7. 2008 | P02 | 24 | Label configuration was updated |
| Nov. 20. 2008 | A00 | All | Approval spec was issued |
| Dec. 5. 2008 | A01 | 23 | Packing was updated |

Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|--------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 3 / 30 |
|----------------|--------------|---------------|-----------------|-------------|--------|

Approval

GENERAL DESCRIPTION

DESCRIPTION

LTN156AT02-D is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight system. The resolution of a 15.6" contains 1366 x 768 pixels and can display up to 262,144 colors. 6 O'clock direction is the Optimum viewing angle.

FEATURES

- Thin and light weight
- High contrast ratio, high aperture structure
- 1366 x 768 pixels resolution (16:9)
- Fast Response Time
- Low power consumption
- LED BLU Structure
- DE (Data enable) only mode
- 3.3V LVDS Interface
- On board EDID chip
- Pb-free product

APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

GENERAL INFORMATION

| Item | Specification | Unit | Note |
|-------------------|---|-------|--------|
| Display area | 344.232 (H) x 193.536 (V) (15.6"diagonal) | mm | |
| Driver element | a-Si TFT active matrix | | |
| Display colors | 262,144 | | |
| Number of pixel | 1366 x 768 | pixel | 16 : 9 |
| Pixel arrangement | RGB vertical stripe | | |
| Pixel pitch | 0.252 (H) x 0.252 (V) (TYP.) | mm | |
| Display Mode | Normally white | | |
| Surface treatment | Haze 0, Hardness 3H | | Glare |

Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|--------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 4 / 30 |
|----------------|--------------|---------------|-----------------|-------------|--------|

Approval

Mechanical Information

| Item | | Min. | Typ. | Max. | Unit | Note |
|-------------|----------------|-------|-------|-------|------|------|
| Module size | Horizontal (H) | 358.8 | 359.3 | 359.8 | mm | |
| | Vertical (V) | 209.0 | 209.5 | 210 | mm | |
| | Depth (D) | - | - | 5.5 | mm | (1) |
| Weight | | - | - | 450 | g | |


Note (1) Measurement condition of outline dimension
 . Equipment : Vernier Calipers
 . Push Force : 500g · f (minimum)

1. ABSOLUTE MAXIMUM RATINGS

1.1 ENVIRONMENTAL ABSOLUTE RATINGS

| Item | Symbol | Min. | Max. | Unit | Note |
|---|--------|------|------|------|---------|
| Storage temperate | TSTG | -20 | 60 | °C | (1) |
| Operating temperate (Temperature of glass surface) | TOPR | 0 | 50 | °C | (1) |
| Shock (non-operating) | Snop | - | 240 | G | (2),(4) |
| Vibration (non-operating) | Vnop | - | 2.41 | G | (3),(4) |

Note (1) Temperature and relative humidity range are shown in the figure below.
 95 % RH Max. ($40\text{ }^{\circ}\text{C} \geq T_a$)
 Maximum wet - bulb temperature at $39\text{ }^{\circ}\text{C}$ or less. ($T_a > 40\text{ }^{\circ}\text{C}$) No condensation

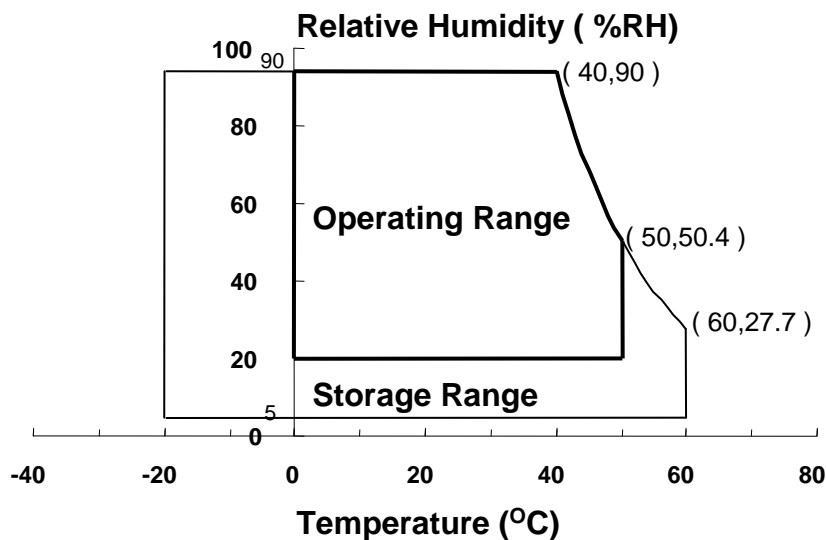

- (2) 2ms, half sine wave, one time for $\pm X, \pm Y, \pm Z$.
- (3) 5 - 500 Hz, random vibration, 30min for X, Y, Z.
- (4) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

Samsung Secret

Approval

1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD MODULE

$V_{DD} = 3.3V$, $V_{SS} = GND = 0V$

| Item | Symbol | Min. | Max. | Unit | Note |
|----------------------|----------|----------------|----------------|------|------|
| Power Supply Voltage | V_{DD} | $V_{DD} - 0.3$ | $V_{DD} + 0.3$ | V | (1) |
| Logic Input Voltage | V_{DD} | $V_{DD} - 0.3$ | $V_{DD} + 0.3$ | V | (1) |

Note (1) Within T_a (25 ± 2 °C)

Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|--------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 6 / 30 |
|----------------|--------------|---------------|-----------------|-------------|--------|

2. OPTICAL CHARACTERISTICS

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5).
 Measuring equipment : TOPCON SR-3


* Ta = 25 ± 2 °C, VDD=3.3V, fv= 60Hz, fdCLK = 72.33 MHz, IL = 20 mA

| Item | Symbol | Condition | Min. | Typ. | Max | Unit | Note | |
|---|--------------------|--|----------------|-------|-------|-------------------|---------------------|--|
| Contrast Ratio (5 Points) | CR | Normal Viewing Angle $\phi = 0$ $\theta = 0$ | 500 | 600 | - | - | (1), (2), (5) | |
| Response Time at Ta (Rising + Falling) | T _{RT} | | - | 25 | 35 | msec | (1), (3) | |
| Average Luminance of White (5 Points) | Y _{L,AVE} | | 200 | 220 | - | cd/m ² | IL=19mA (1), (4) | |
| Color Chromaticity (CIE) | Red | | R _X | 0.590 | 0.620 | 0.650 | - | |
| | | | R _Y | 0.310 | 0.340 | 0.370 | | |
| | Green | | G _X | 0.300 | 0.330 | 0.360 | | |
| | | | G _Y | 0.540 | 0.570 | 0.600 | | |
| | Blue | | B _X | 0.120 | 0.150 | 0.180 | | |
| | | | B _Y | 0.030 | 0.060 | 0.090 | | |
| | White | | W _X | 0.283 | 0.313 | 0.343 | | |
| | | W _Y | 0.299 | 0.329 | 0.359 | | | |
| Viewing Angle | Hor. | θ_L | 40 | - | - | Degrees | (1), (5) SR-3 | |
| | | θ_R | 40 | - | - | | | |
| | Ver. | ϕ_H | 15 | - | - | | | |
| | | ϕ_L | 30 | - | - | | | |
| Color Gamut | | | - | 60 | - | % | | |
| 13 Points White Variation | δ_L | | - | - | 1.7 | - | (6) | |

Samsung Secret

Approval

Note 1) Definition of Viewing Angle : Viewing angle range($10 \leq C/R$)

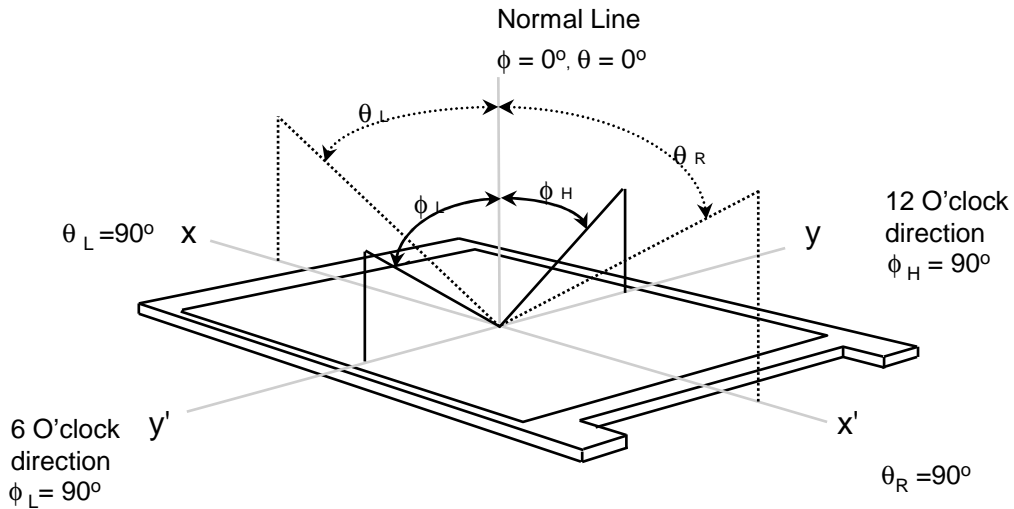


Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at 5 points(4, 5, 7, 9, 10)


$$CR = \frac{CR(4) + CR(5) + CR(7) + CR(9) + CR(10)}{5}$$

Points : (4) , (5) , (7) , (9) , (10) at the figure of Note (6).

Note 3) Definition of Response time :

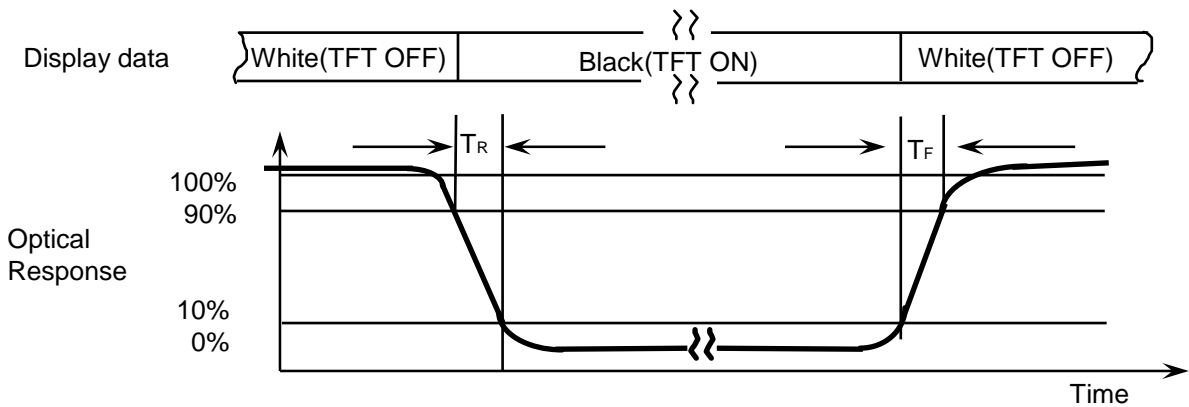

Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.

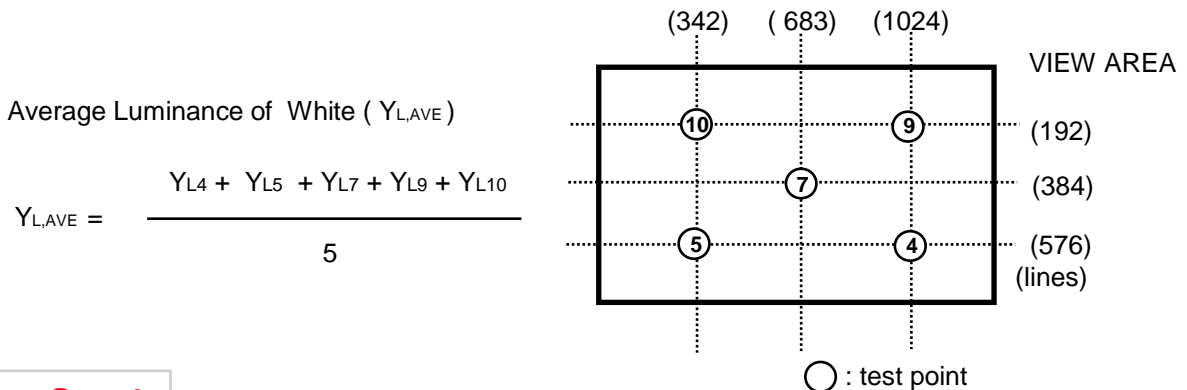


Samsung Secret

Approval

Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. 30 min after lighting the backlight. This should be measured in the center of screen.


LED current : 20 mA

Environment condition : $T_a = 25 \pm 2 \text{ }^\circ\text{C}$

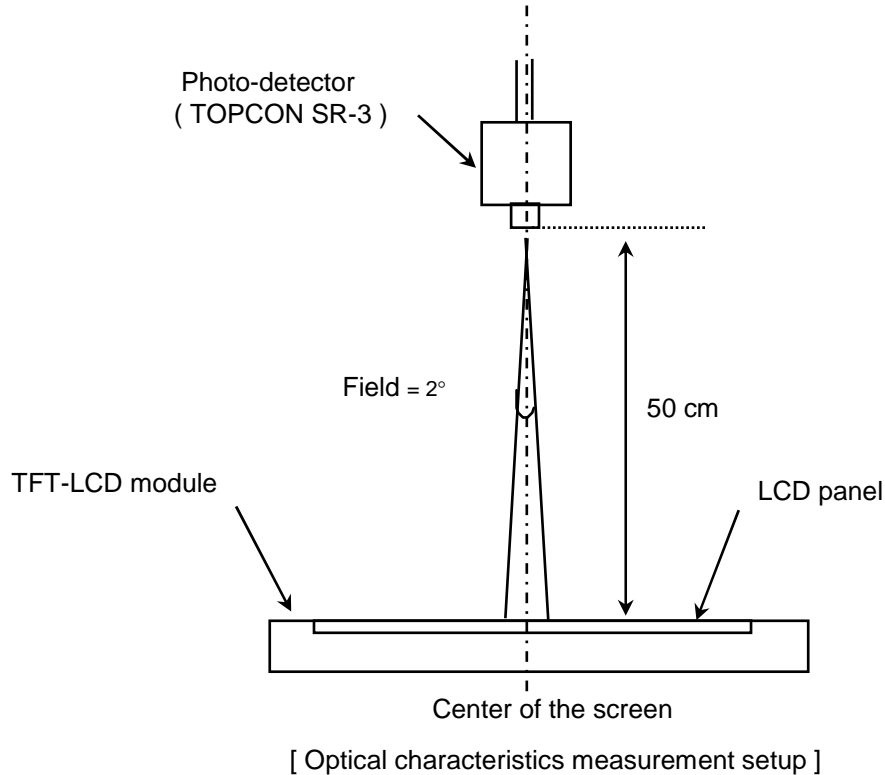

Note 6) Definition of 13 points white variation (δL), [① ~ ⑬]

$$\delta L = \frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

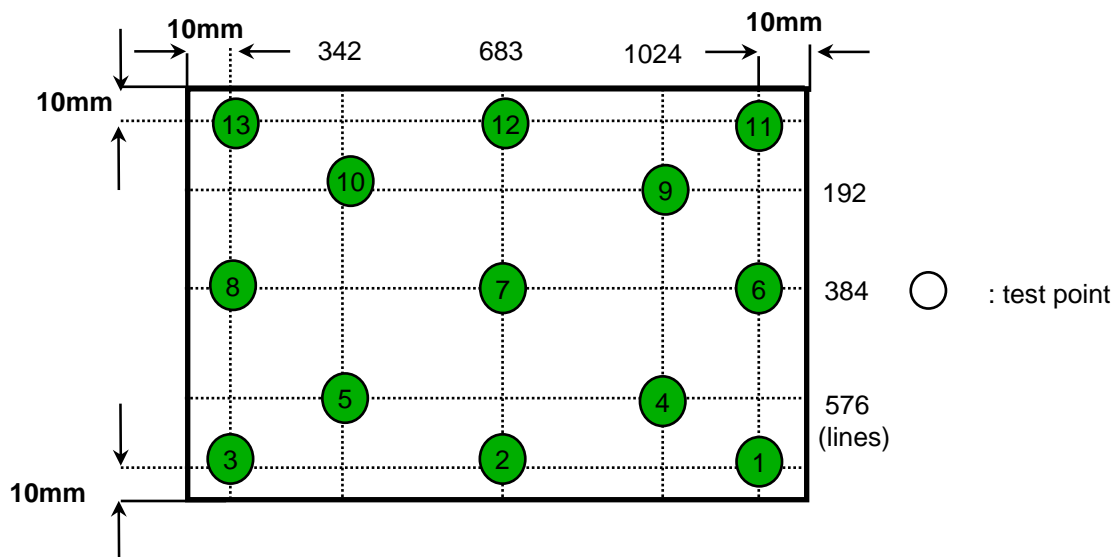

Samsung Secret

| | | | | | |
|---------|--------------|--------|-----------------|------|--------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 9 / 30 |
|---------|--------------|--------|-----------------|------|--------|

3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD MODULE

Ta= 25 ± 2°C


| Item | Symbol | Min. | Typ. | Max. | Unit | Note | |
|--|-------------------|-----------------|-------|------|------|------|-------------------------|
| Voltage of Power Supply | V _{DD} | 3.0 | 3.3 | 3.6 | V | | |
| Differential Input Voltage for LVDS Receiver Threshold | High | V _{IH} | - | - | +100 | mV | V _{CM} = +1.2V |
| | Low | V _{IL} | -100 | - | - | mV | |
| Vsync Frequency | f _v | - | 60 | - | Hz | | |
| Hsync Frequency | f _H | - | 47.40 | - | KHz | | |
| Main Frequency | f _{DCLK} | - | 72.33 | - | MHz | | |
| Rush Current | I _{RUSH} | - | - | 1.5 | A | (4) | |
| Current of Power Supply | White | I _{DD} | - | 360 | - | mA | (2),(3)*a |
| | Mosaic | | - | 420 | - | mA | (2),(3)*b |
| | V. Stripe | | - | 530 | 600 | mA | (2),(3)*c |

Note (1) Display data pins and timing signal pins should be connected.(GND = 0V)

(2) f_v = 60Hz, f_{DCLK} = 72.33 MHz, V_{DD} = 3.3V , DC Current.

(3) Power dissipation pattern


*a) White Pattern

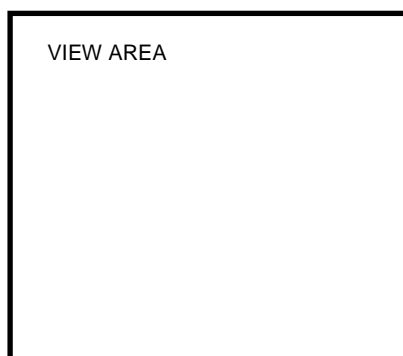

*b) Mosaic Pattern

Display Brightest Gray Level →


Display Darkest Gray Level →

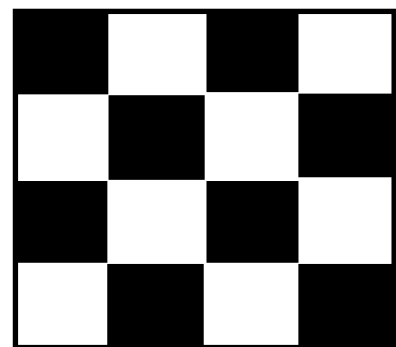


Samsung Secret

Approval


*c) 1dot Vertical stripe pattern

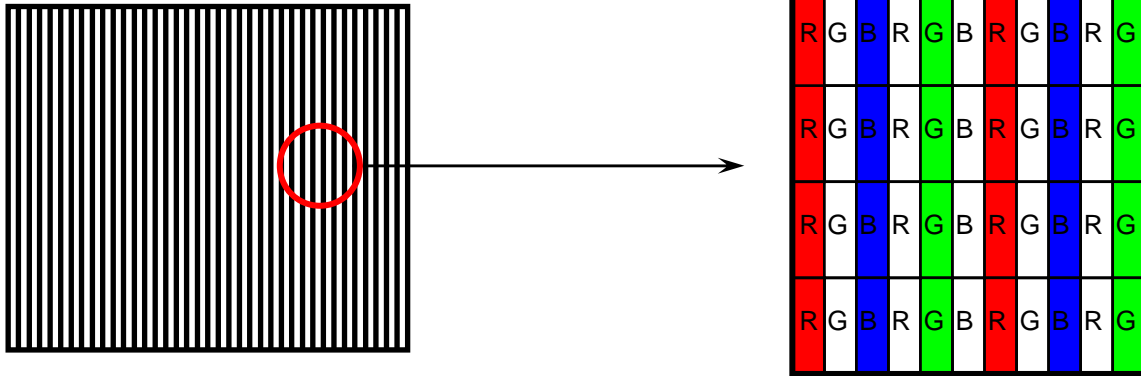

4) Rush current measurement condition

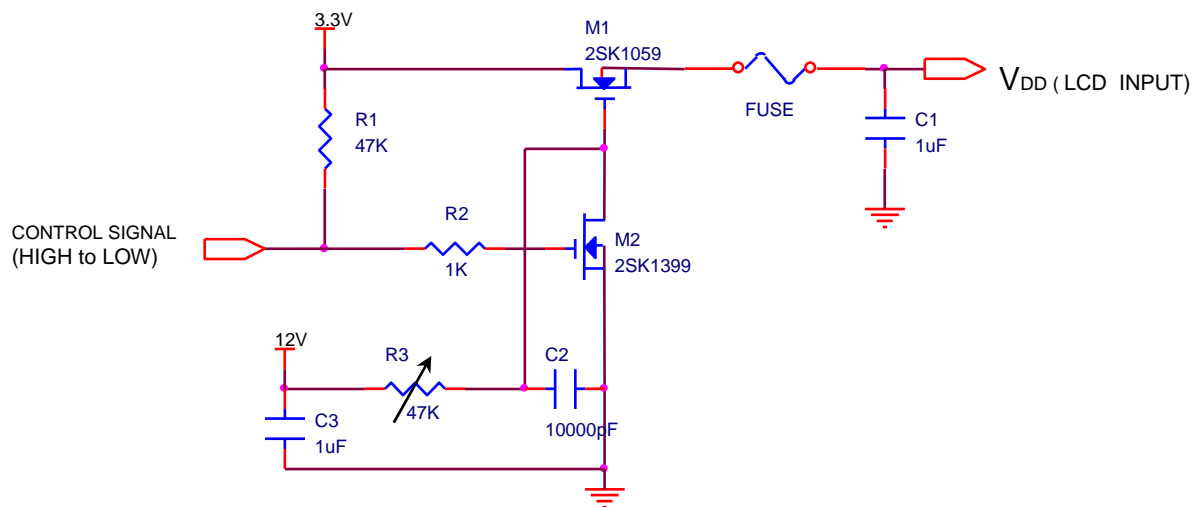

V_{DD} rising time is 470us

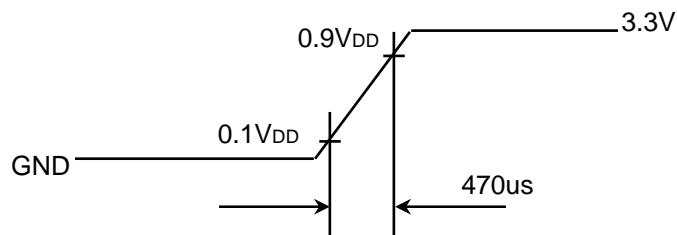

Samsung Secret

| | | | | | |
|---------|--------------|--------|-----------------|------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 11 / 30 |
|---------|--------------|--------|-----------------|------|---------|

Approval

3.2 BACK-LIGHT UNIT

Ta= 25 ± 2 °C

| Item | Symbol | Min. | Typ. | Max. | Unit | Note |
|---------------------|--------|------|------|------|------|--------------------------------------|
| LED Forward Current | IF | - | 20 | - | mA | |
| LED Forward Voltage | VF | 3.0 | - | 3.4 | V | |
| LED Array Voltage | VP | 24 | - | 27.2 | V | VF X 8 LEDs |
| Power Consumption | P | 2.88 | - | 3.26 | W | IF X VF X 48 LEDs (w/o Converter) |

3.3 LED Driver

- LED Driver Manufacturer : ST Micro

Ta= 25 ± 2 °C

| Item | Symbol | Min. | Typ. | Max. | Unit | Note |
|---|-------------------|--------|-------------------|-------|------|---|
| Input Voltage | V _{in} | 4.7 | - | 28 | V | |
| Input Current | I | - | 2A RMS 5A Peak | - | mA | Max.MOSFET curent in PM6600 |
| Input Power | P _{in} | - | - | - | W | |
| Operating Frequency | F _o | 200KHz | 660KHz | 1MHz | MHz | 600KHz Possible |
| Output PWM Frequency | F _{PWM} | - | - | - | kHz | No output PWM |
| Burst Ratio | D | 1 | - | 100 | % | PWM freq : 200Hz~20KHz |
| External PWM Dimming Control Frequency (BLIM) | F _{BLIM} | 200Hz | - | 20KHz | kHz | Vin=8~21V, BLIM=PWM 0V~3.3V |
| Output Power | P _{out} | - | - | 2.3 | W | BLIM=100% |
| Efficiency | η | 88 | - | 94 | % | (Generally, Efficiency can be defined depends on Duty cycle , Vin and Dimming Freq.) |

Note - Test Equipment : Fluke 45


Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 12 / 30 |
|----------------|--------------|---------------|-----------------|-------------|---------|


Approval

4. BLOCK DIAGRAM

4.1 TFT LCD Module

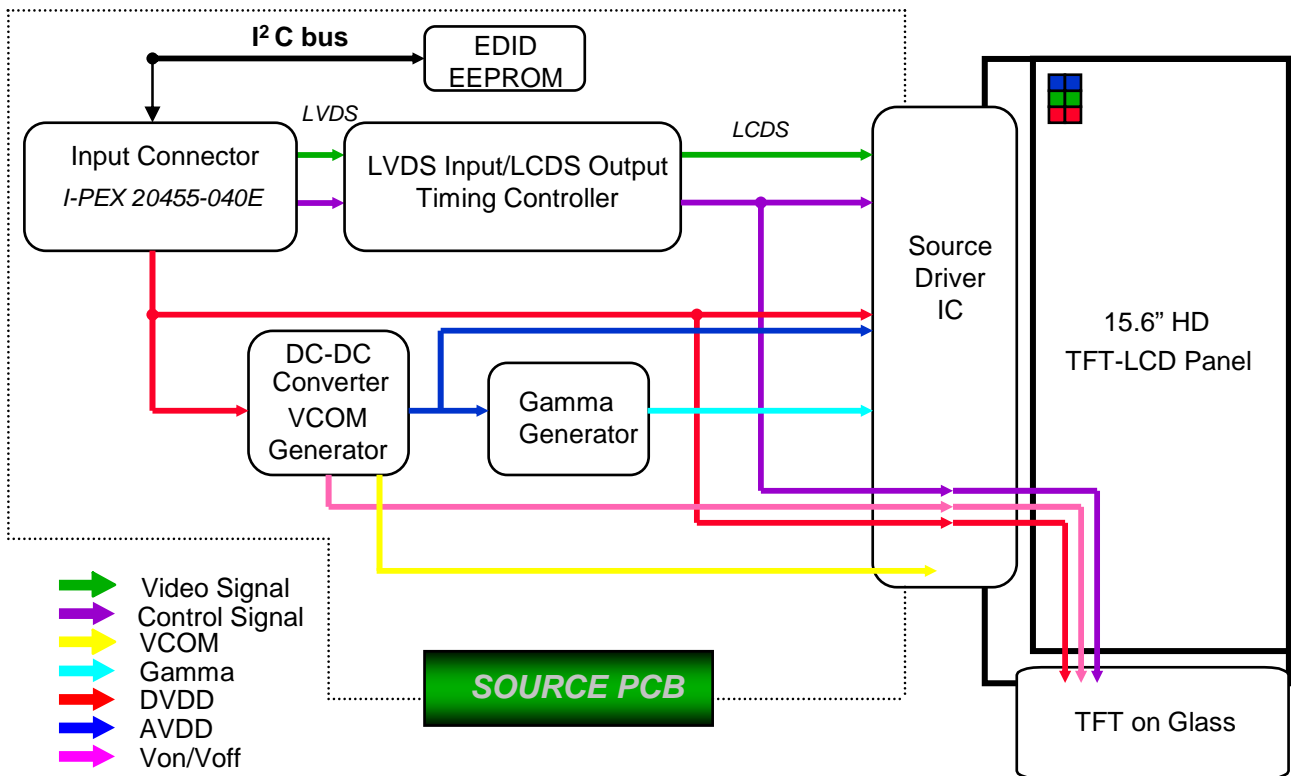

4.2 LED connection and placement

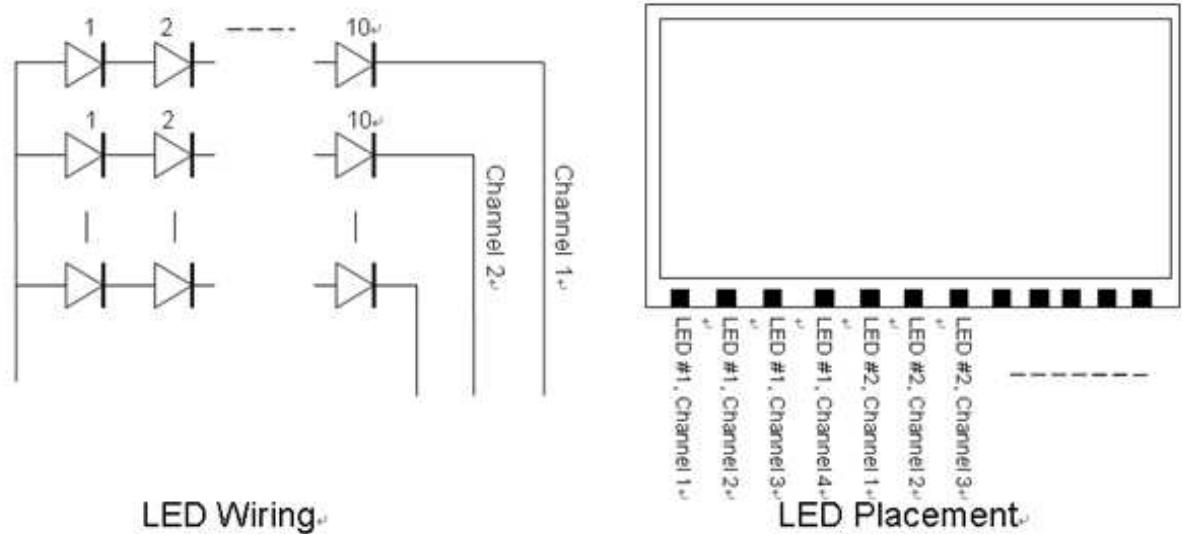

Samsung Secret

5. INPUT TERMINAL PIN ASSIGNMENT

5.1. Input Signal & Power (LVDS, Connector : I-PEX 20455-040E)

| PIN # | Symbol | Description |
|-------|------------|---|
| 1 | DIAG_LOOP | Diag pin for Dell testing. Pin 1 & 34 must be connected |
| 2 | VDD | Power Supply, 3.3 V (typical) |
| 3 | VDD | Power Supply, 3.3 V (typical) |
| 4 | V EEDID | DDC 3.3V power |
| 5 | TEST | Panel Self Test |
| 6 | Clk EEDID | DDC Clock |
| 7 | DATA EEDID | DDC Data |
| 8 | Odd_Rin0- | - LVDS differential data input (R0-R5, G0) (odd pixels) |
| 9 | Odd_Rin0+ | + LVDS differential data input (R0-R5, G0) (odd pixels) |
| 10 | VSS | Ground – Shield |
| 11 | Odd_Rin1- | - LVDS differential data input (G1-G5, B0-B1) (odd pixels) |
| 12 | Odd_Rin1+ | + LVDS differential data input (G1-G5, B0-B1) (odd pixels) |
| 13 | VSS | Ground – Shield |
| 14 | Odd_Rin2- | - LVDS differential data input (B2-B5, HS, VS, DE) (odd pixels) |
| 15 | Odd_Rin2+ | + LVDS differential data input (B2-B5, HS, VS, DE) (odd pixels) |
| 16 | VSS | Ground – Shield |
| 17 | Odd_ClkIN- | - LVDS differential clock input (odd pixels) |
| 18 | Odd_ClkIN+ | + LVDS differential clock input (odd pixels) |
| 19 | NC | No connection |
| 20 | NC | No connection |
| 21 | NC | No connection |
| 22 | NC | No connection |
| 23 | NC | No connection |
| 24 | NC | No connection |
| 25 | NC | No connection |

Samsung Secret

Approval

5. INPUT TERMINAL PIN ASSIGNMENT

5.1. Input Signal & Power (LVDS, Connector : I-PEX 20455-040E)

| PIN # | Symbol | Description |
|-------|-----------|---|
| 26 | NC | No connection |
| 27 | NC | No connection |
| 28 | NC | No connection |
| 29 | NC | No connection |
| 30 | NC | No connection |
| 31 | VSSLED | Ground – LED |
| 32 | VSSLED | Ground – LED |
| 33 | VSSLED | Ground – LED |
| 34 | DIAG_LOOP | Diag pin for Dell testing. Pin 1 & 34 must be connected |
| 35 | PWM | System PWM Signal Input (+3.3V Swing) |
| 36 | LED_EN | LED enable pin (+3.3V Input) |
| 37 | NC | NC |
| 38 | VDDLED | 7.5V – 21V LED power |
| 39 | VDDLED | 7.5V – 21V LED power |
| 40 | VDDLED | 7.5V – 21V LED power |


Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 15 / 30 |
|----------------|--------------|---------------|-----------------|-------------|---------|

5.2 LVDS Interface : Transmitter DS90CF363 or Compatible

| Pin No. | Name | RGB Signal | Pin No. | Name | RGB Signal |
|---------|--------|------------|---------|---------|------------|
| 51 | TxIN0 | R0 | 14 | TxIN14 | G5 |
| 52 | TxIN1 | R1 | 15 | TxIN15 | B0 |
| 54 | TxIN2 | R2 | 19 | TxIN18 | B1 |
| 55 | TxIN3 | R3 | 20 | TxIN19 | B2 |
| 56 | TxIN4 | R4 | 22 | TxIN20 | B3 |
| 3 | TxIN6 | R5 | 23 | TxIN21 | B4 |
| 4 | TxIN7 | G0 | 24 | TxIN22 | B5 |
| 6 | TxIN8 | G1 | 27 | TxIN24 | Hsync |
| 7 | TxIN9 | G2 | 28 | TxIN25 | Vsync |
| 11 | TxIN12 | G3 | 30 | TxIN26 | DE |
| 12 | TxIN13 | G4 | 31 | TxCLKIN | Clock |

LVDS INTERFACE

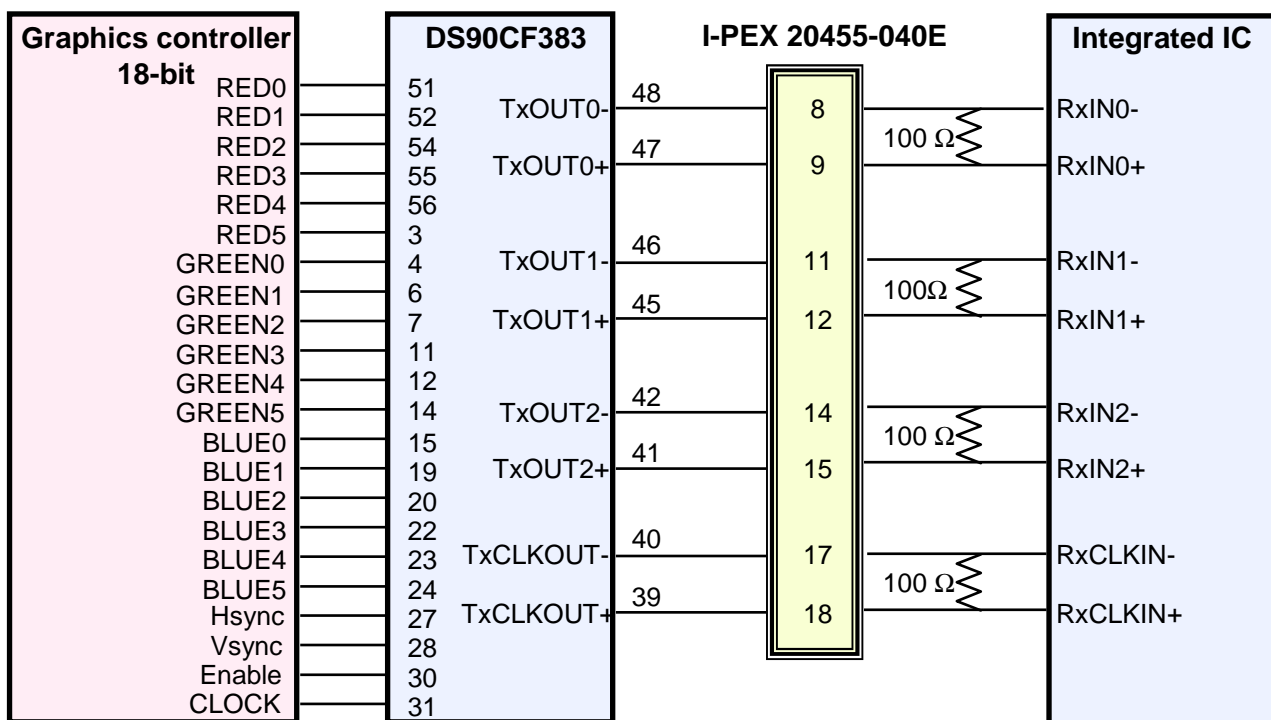


Note : The LCD Module uses a 100ohm resistor between positive and negative lines of each receiver input.

Samsung Secret

Approval

5.3 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-CON

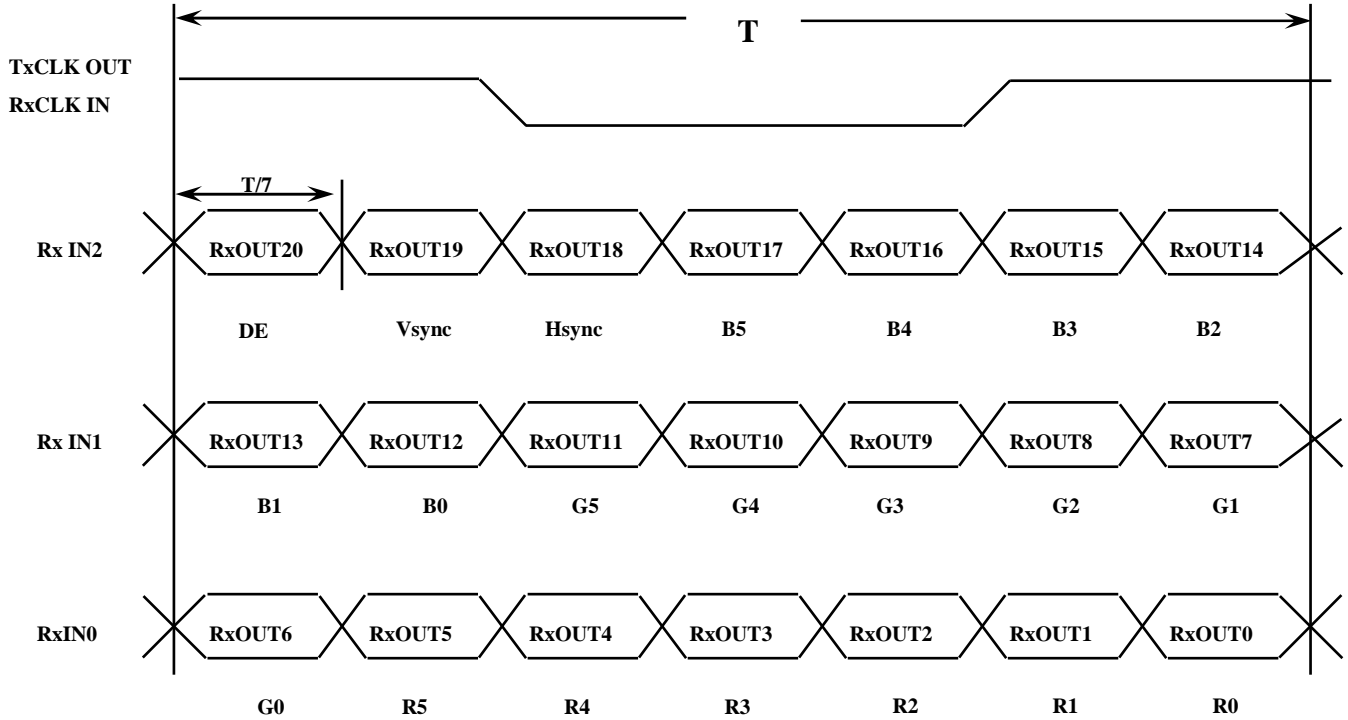

Samsung Secret

Approval

5.4 Input Signals, Basic Display Colors and Gray Scale of Each Color

| Color | Display | Data Signal | | | | | | | | | | | | | | | | Gray Scale Level | |
|--------------------|---------------------|-------------|----|----|----|----|-------|----|----|----|----|------|----|----|----|----|----|------------------|--------|
| | | Red | | | | | Green | | | | | Blue | | | | | | | |
| | | R0 | R1 | R2 | R3 | R4 | R5 | G0 | G1 | G2 | G3 | G4 | G5 | B0 | B1 | B2 | B3 | | 45 |
| Basic Colors | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - |
| | Blue | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | - |
| | Green | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | - |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | - |
| | Red | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | - |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | - |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | - |
| Gray Scale Of Red | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | R0 |
| | Dark | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | R1 |
| | ↑ | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | R3~R60 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| | ↓ | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | R61 |
| | Light | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | R62 |
| | Red | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | R63 |
| | Gray Scale Of Green | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Dark | | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | G1 |
| ↑ | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | G3~G60 |
| : | | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | |
| ↓ | | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | G61 |
| Light | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | G62 |
| Green | | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | G63 |
| Gray Scale Of Blue | | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Dark | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | B1 |
| | ↑ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | B2 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | B3~B60 |
| | ↓ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | |
| | Light | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | B62 |
| | Blue | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | B63 |

Note 1) Definition of gray :


Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)

Note 2) Input signal: 0 =Low level voltage, 1=High level voltage

Samsung Secret

Approval

5.5 Pixel Format in the display

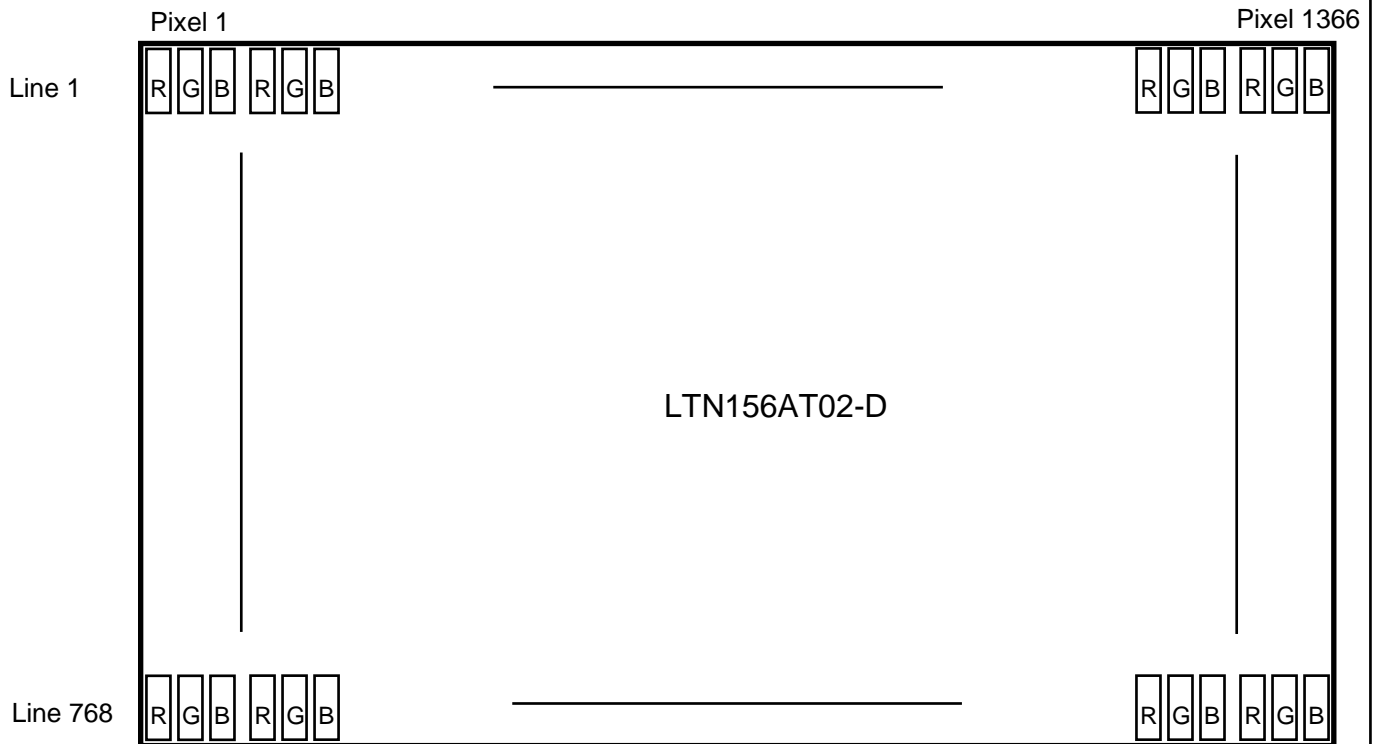

Samsung Secret


| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 19 / 30 |
|----------------|--------------|---------------|-----------------|-------------|---------|

6. INTERFACE TIMING

6.1 Timing Parameters

| Signal | Item | Symbol | Min. | Typ. | Max. | Unit | Note |
|--------------------------------|----------------|--------|------|------|------|--------|------|
| Frame Frequency | Cycle | TV | - | 790 | - | Lines | - |
| Vertical Active Display Term | Display Period | TVD | - | 768 | - | Lines | - |
| One Line Scanning Time | Cycle | TH | - | 1526 | - | Clocks | - |
| Horizontal Active Display Term | Display Period | THD | - | 1366 | - | Clocks | - |


6.2 Timing diagrams of interface signal

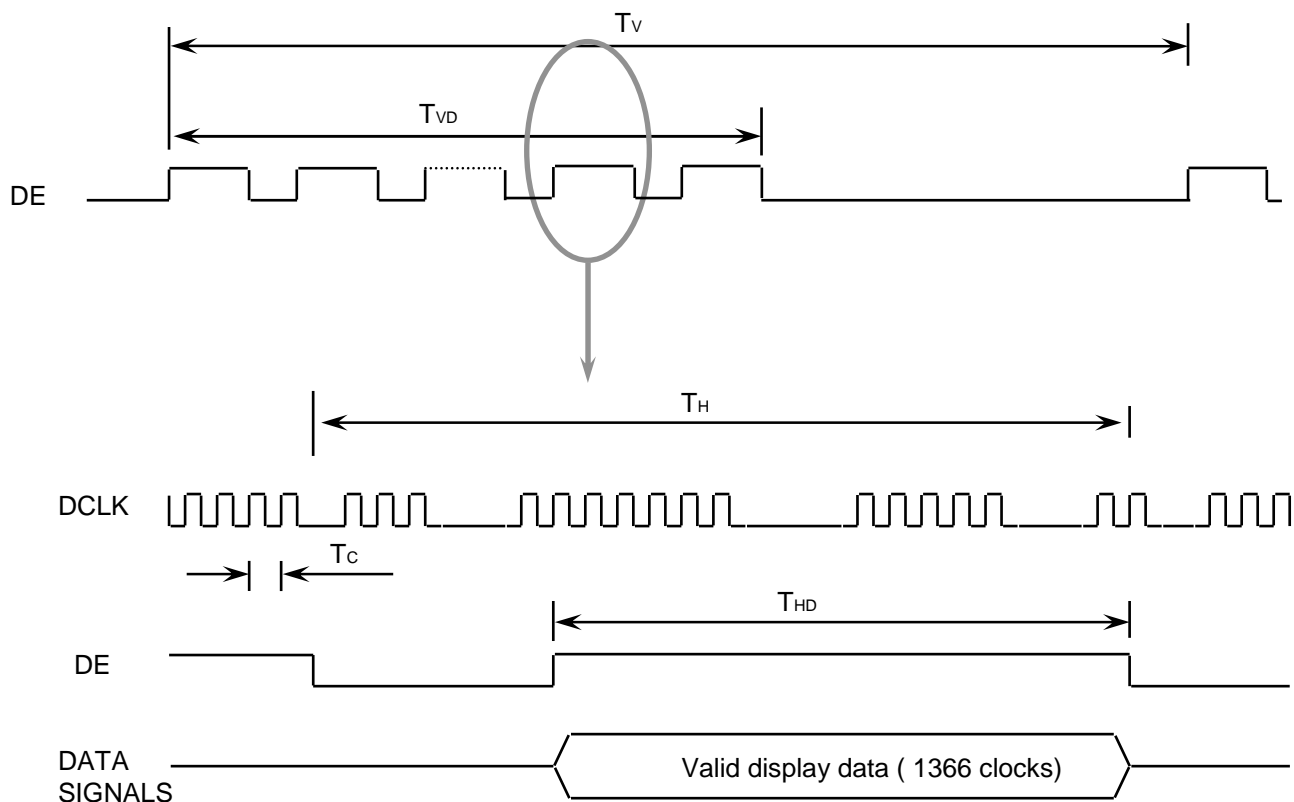

Samsung Secret

6.3 Power ON/OFF Sequence

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

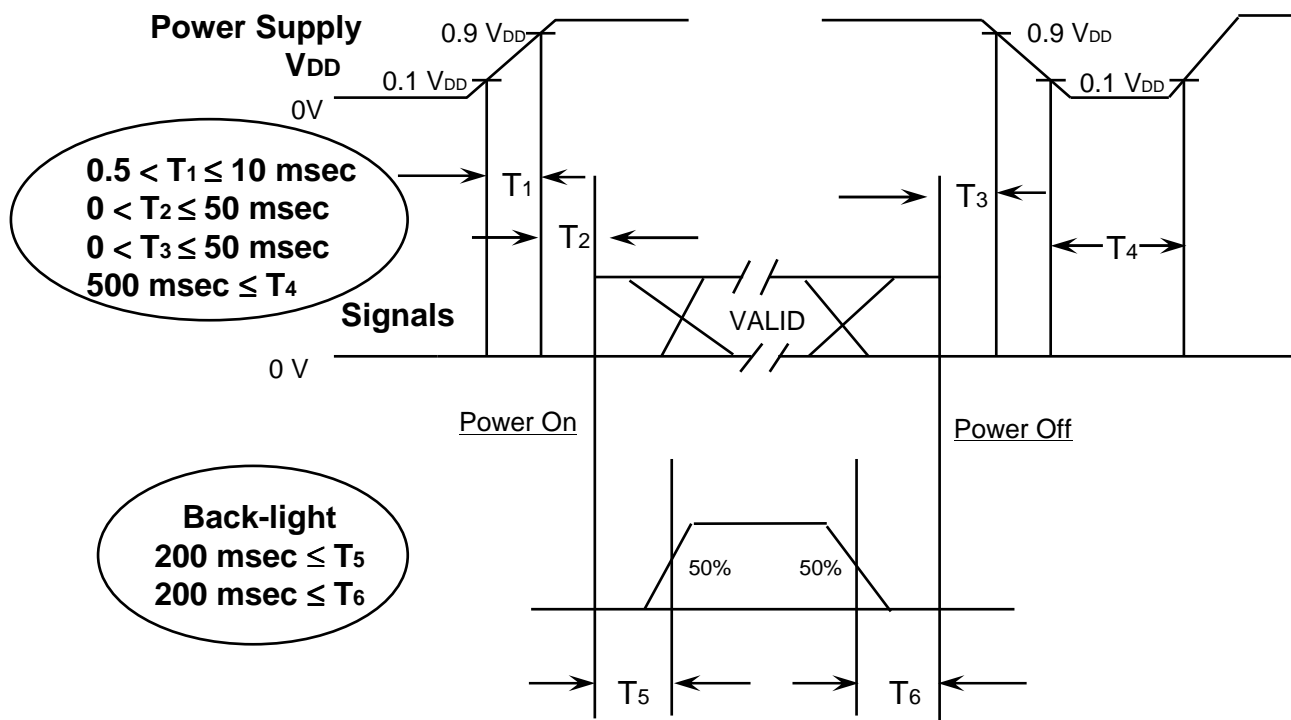

Power ON/OFF Sequence

- T1 : Vdd rising time from 10% to 90%
- T2 : The time from Vdd to valid data at power ON.
- T3 : The time from valid data off to Vdd off at power Off.
- T4 : Vdd off time for Windows restart
- T5 : The time from valid data to B/L enable at power ON.
- T6 : The time from valid data off to B/L disable at power Off.

NOTE.

- (1) The supply voltage of the external system for the module input should be the same as the definition of V_{DD} .
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of $V_{DD} = \text{off level}$, please keep the level of input signals on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 21 / 30 |
|----------------|--------------|---------------|-----------------|-------------|---------|




7. MECHANICAL OUTLINE DIMENSION

Approval

It will be attached with PDF file


Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 22 / 30 |
|----------------|--------------|---------------|-----------------|-------------|---------|

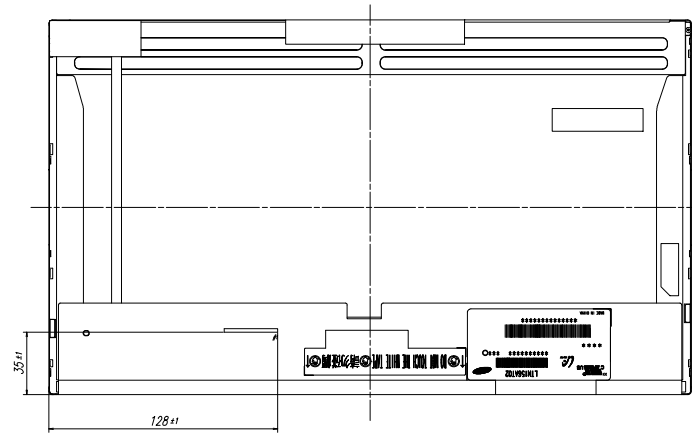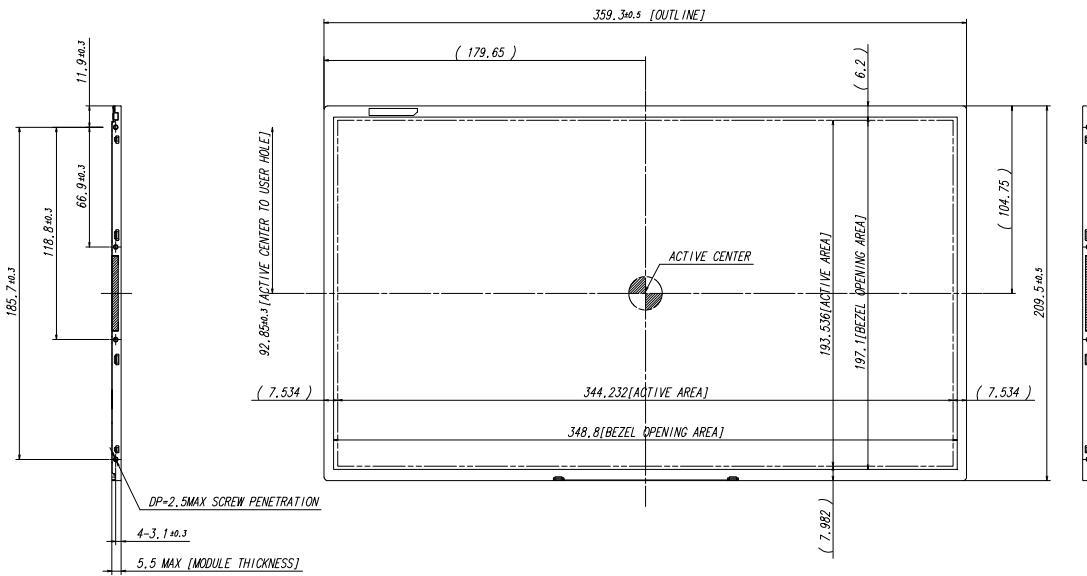

<USER HOLE SCREW PENETRATION DEPTH>

Approval



- * NOTE
- SIGNAL INTERFACE CONNECTOR TO BE SPECIFIED AS BELOW.
 - MAKER : I-PEX OR COMPATIBLE
 - INPUT CONNECTOR : I-PEX 20455-#40#-## OR EQUIVALENT
 - LED CONNECTOR FOR BACKLIGHT TO BE SPECIFIED AS BELOW.
 - MAKER : WU Electronics
 - PART NO : 51441-1041
 - TORQUE SPEC : MAX 2.5 Kgf-cm
 - GENERAL TOLERANCE : ± 0.5

| REV | DATE | DESCRIPTION OF REVISION | REASON | CHK'D BY |
|-----|----------|-------------------------------------|--------|----------|
| 1 | 01.11.03 | INITIAL DESIGN BY CHECK BY APP'D BY | | |
| 2 | 02.11.03 | REVISE BY CHECK BY APP'D BY | | |
| 3 | 03.11.03 | REVISE BY CHECK BY APP'D BY | | |

| | | | | | | | | | | | | | | | |
|---------------------|-----|----------|----|-------------------|------------|----------|---------|----------|---------|------|------------|-------------------|------------|-------|-----|
| SCALE | 1:1 | UNIT | MM | DATE | 2003.11.11 | DESIGNER | A.M.A.M | CHECKER | A.S.A.M | DATE | 2003.11.11 | PART/PROJECT NAME | LTN156AT02 | SHEET | 1/1 |
| SPEC. NO. | | CODE NO. | | OUTLINE DIMENSION | | VER. | 001 | | | | | | | | |
| SAMSUNG ELECTRONICS | | | | | | | | REV. 001 | | | | | | | |

Approval

8. PACKING


1. CARTON(Internal Package)

(1) Packing Form



Corrugated Cardboard box and Corrupad form as shock absorber

(2) Packing Method

CUSHION BOTTOM

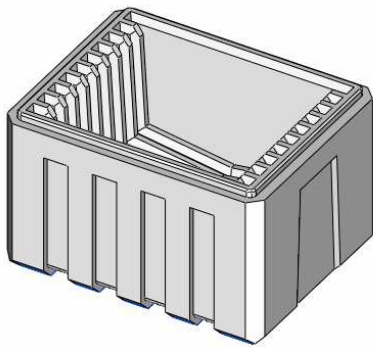

PANEL : 2EA/SLIT

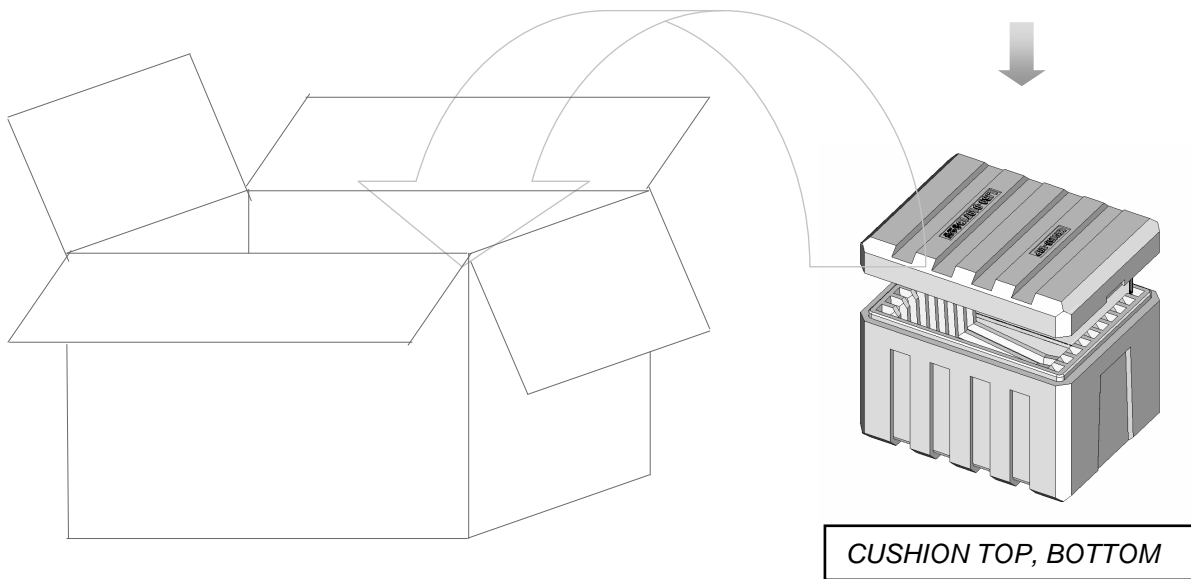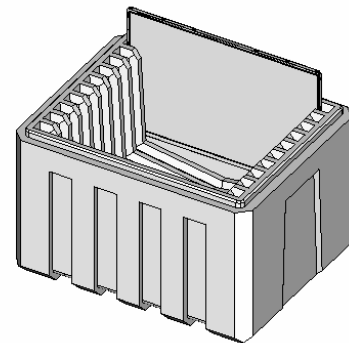

CUSHION TOP, BOTTOM

Note (1) Total : Approx. 12400g

(2) Acceptance number of piling : 20 sets

(3) Carton size : 344(W) X 432(D) X 329(H)

Samsung Secret

Doc.No.

LTN156AT02-D

Rev.No

04-A01-S-081205

Page

23 / 30


Approval

| No | Part name | Quantity |
|----|---|----------|
| 1 | Static electric protective sack | 10 |
| 2 | Packing case (Inner box) included shock absorber | 1 set |
| 3 | Pictorial marking | 2 pcs |
| 4 | Carton | 1 set |

9. MARKINGS & OTHERS


A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1) Parts number : LTNXXXXXXXX-XXX

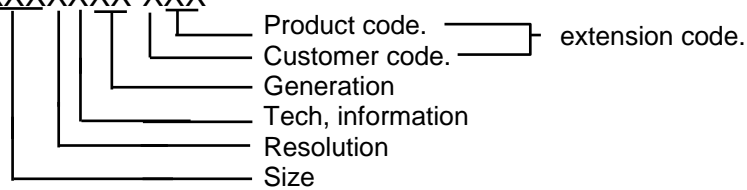


(2) Revision : Three letters

(3) Lot number : X Y 7 A XXX XX X

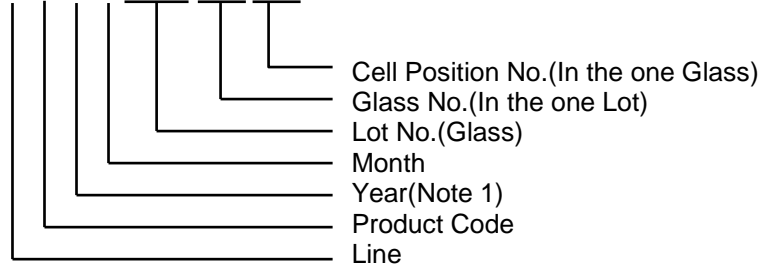

NOTE 1). This code indicating year is omitted in the products of KIHEUNG site.

(5) Nameplate Indication(Following example is only for reference)

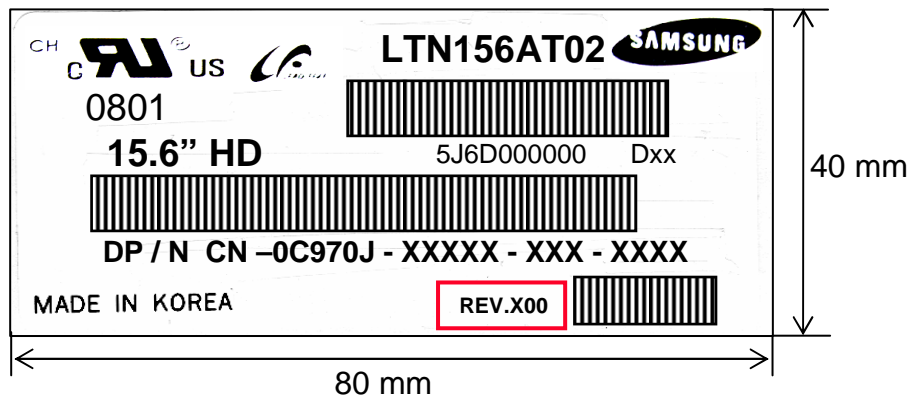


Parts name : LTN156AT02-D
 Lot number : 5J6D000000
 Inspected work week : 0801 Number ("0C970J" is for 156AT02-D)
 DP/N : Dell Part
 REV.X00 : Product Revision Code

Samsung Secret

| | | | | | |
|---------|--------------|--------|-----------------|------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 24 / 30 |
|---------|--------------|--------|-----------------|------|---------|

This HIGH VOLTAGE CAUTION is carved in mold frame

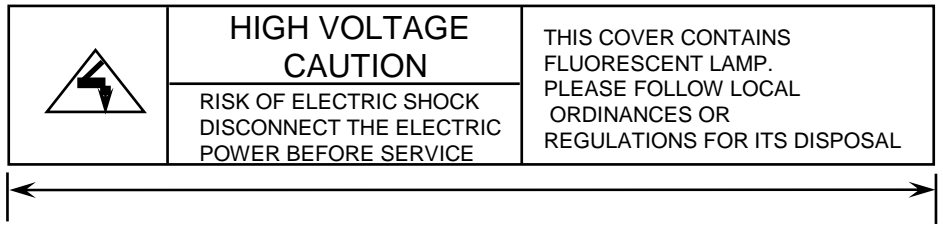


70mm

10mm High voltage caution

※ Panel revision code scheme (Refer to the Red box on the label)

| Build Name(s) | Revision Code(s) |
|---------------|------------------------|
| SST (WS) | X00, X01, X02, ... X09 |
| PT (ES) | X10, X11, X12, ... X19 |
| ST (CS) | X20, X21, X23, ... X29 |
| XB (MP) | A00, A01, A02, ... A99 |

(6) Packing small box attach (Following example is only for reference)

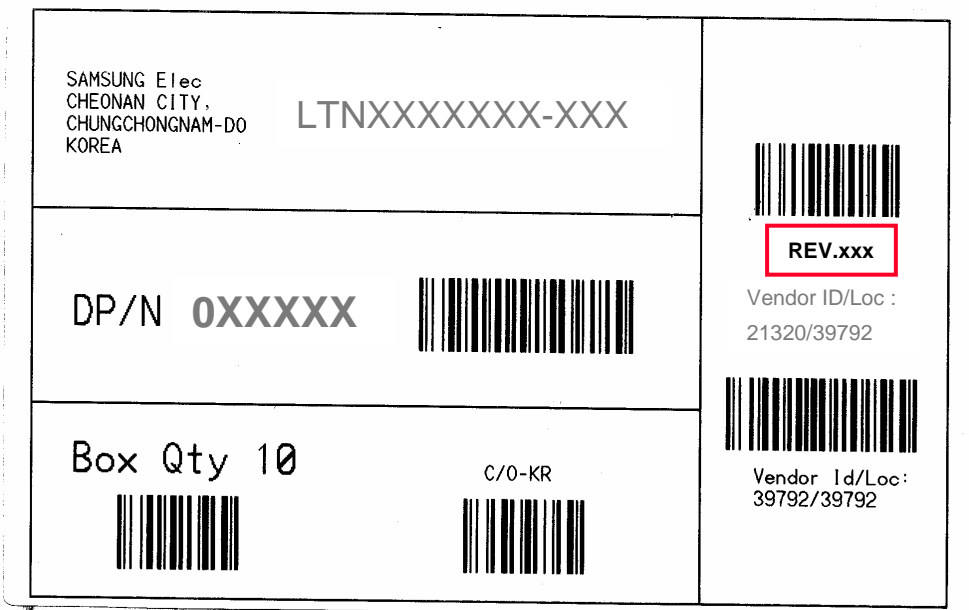

OXXXXX : DELL P/N

(7) Packing box Marking : Samsung TFT-LCD Brand Name



Samsung Secret

10. GENERAL PRECAUTIONS

Approval

1. Handling

- (a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA (Isoprophyl Alcohol) or Hexane. Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static, it may cause damage to the C-MOS Gate Array IC.
- (i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Do not pull or fold the lamp wire.
- (l) Do not adjust the variable resistor which is located on the back side.
- (m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector shall not be touched directly with bare hands.

Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 26 / 30 |
|----------------|--------------|---------------|-----------------|-------------|---------|

Approval

2. STORAGE

- (a) Do not leave the module in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module in direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

3. OPERATION

- (a) Do not connect,disconnect the module in the “ Power On” condition.
- (b) Power supply should always be turned on/off by following item 6.3
“ Power on/off sequence “.
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

4. OTHERS

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on)
Otherwise the module may be damaged.
- (d) If the module displays the same pattern continuously for a long period of time,it can be the situation when the image “sticks” to the screen.
- (e) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

Samsung Secret

| | | | | | |
|----------------|--------------|---------------|-----------------|-------------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 27 / 30 |
|----------------|--------------|---------------|-----------------|-------------|---------|

Approval

| | Byte (hex) | Field Name and Comments | Value (hex) | Value (binary) |
|----------------------------------|-----------------------|--|------------------------------------|-------------------|
| Header | 0 | Header | 00 | 00000000 |
| | 1 | Header | FF | 11111111 |
| | 2 | Header | FF | 11111111 |
| | 3 | Header | FF | 11111111 |
| | 4 | Header | FF | 11111111 |
| | 5 | Header | FF | 11111111 |
| | 6 | Header | FF | 11111111 |
| | 7 | Header | 00 | 00000000 |
| Vendor / Product EDID Version | 8 | EISA manufacture code = 3 Character ID | 4C | 01001100 |
| | 9 | EISA manufacture code (Compressed ASCII) | A3 | 10100011 |
| | 0A | Panel Supplier Reserved - Product Code | 41 | 01000001 |
| | 0B | Panel Supplier Reserved - Product Code | 54 | 01010100 |
| | 0C | LCD module Serial No - Preferred but Optional ("0" if not used) | 00 | 00000000 |
| | 0D | LCD module Serial No - Preferred but Optional ("0" if not used) | 00 | 00000000 |
| | 0E | LCD module Serial No - Preferred but Optional ("0" if not used) | 00 | 00000000 |
| | 0F | LCD module Serial No - Preferred but Optional ("0" if not used) | 00 | 00000000 |
| | 10 | Week of manufacture | 00 | 00000000 |
| | 11 | Year of manufacture | 12 | 00010010 |
| | 12 | EDID structure version # = 1 | 01 | 00000001 |
| | 13 | EDID revision # = 3 | 03 | 00000011 |
| | Display Parameters | 14 | Video I/P definition = Digital I/P | 90 |
| 15 | | Max H image size = (Rounded to cm) | 22 | 00100010 |
| 16 | | Max V image size = (Rounded to cm) | 13 | 00010011 |
| 17 | | Display gamma = (gamma × 100) - 100 = Example: (2.2 × 100) - 100 = 120 | 78 | 01111000 |
| 18 | | Feature support (no DPMS, Active off, RGB, timing BLK 1) | 0A | 00001010 |
| Panel Color Coordinates | 19 | Red/Green Low bit (RxRy/GxGy) | 87 | 10000111 |
| | 1A | Blue/White Low bit (BxBy/WxWy) | F5 | 11110101 |
| | 1B | Red X Rx = 0.xxx | 94 | 10010100 |
| | 1C | Red Y Ry = 0.xxx | 57 | 01010111 |
| | 1D | Green X Gx = 0.xxx | 4F | 01001111 |
| | 1E | Green Y Gy = 0.xxx | 8C | 10001100 |
| | 1F | Blue X Bx = 0.xxx | 27 | 00100111 |
| | 20 | Blue Y By = 0.xxx | 27 | 00100111 |
| | 21 | White X Wx = 0.xxx | 50 | 01010000 |
| | 22 | White Y Wy = 0.xxx | 54 | 01010100 |
| Established Timings | 23 | Established timings 1 (00h if not used) | 00 | 00000000 |
| | 24 | Established timings 2 (00h if not used) | 00 | 00000000 |
| | 25 | Manufacturer's timings (00h if not used) | 00 | 00000000 |

Samsung Secret

Approval

| | | | | | |
|----------------------|--|--|--------------------------|----------|----------|
| Standard Timing ID | 26 | Standard timing ID1 (01h if not used) | 01 | 00000001 | |
| | 27 | Standard timing ID1 (01h if not used) | 01 | 00000001 | |
| | 28 | Standard timing ID2 (01h if not used) | 01 | 00000001 | |
| | 29 | Standard timing ID2 (01h if not used) | 01 | 00000001 | |
| | 2A | Standard timing ID3 (01h if not used) | 01 | 00000001 | |
| | 2B | Standard timing ID3 (01h if not used) | 01 | 00000001 | |
| | 2C | Standard timing ID4 (01h if not used) | 01 | 00000001 | |
| | 2D | Standard timing ID4 (01h if not used) | 01 | 00000001 | |
| | 2E | Standard timing ID5 (01h if not used) | 01 | 00000001 | |
| | 2F | Standard timing ID5 (01h if not used) | 01 | 00000001 | |
| | 30 | Standard timing ID6 (01h if not used) | 01 | 00000001 | |
| | 31 | Standard timing ID6 (01h if not used) | 01 | 00000001 | |
| | 32 | Standard timing ID7 (01h if not used) | 01 | 00000001 | |
| | 33 | Standard timing ID7 (01h if not used) | 01 | 00000001 | |
| | 34 | Standard timing ID8 (01h if not used) | 01 | 00000001 | |
| 35 | Standard timing ID8 (01h if not used) | 01 | 00000001 | | |
| Timing Descriptor #1 | 36 | Pixel Clock/10,000 (LSB) | 41 | 01000001 | |
| | 37 | Pixel Clock/10,000 (MSB) | 1C | 00011100 | |
| | 38 | Horizontal Active = xxxx pixels (lower 8 bits) | 56 | 01010110 | |
| | 39 | Horizontal Blanking (Thbp) = xxxx pixels (lower 8 bits) | A0 | 10100000 | |
| | 3A | Horizontal Active/Horizontal blanking (Thbp) (upper 4:4 bits) | 50 | 01010000 | |
| | 3B | Vertical Active = xxxx lines | 00 | 00000000 | |
| | 3C | Vertical Blanking (Tvbp) = xxxx lines (DE Blanking typ. for DE only panels) | 16 | 00010110 | |
| | 3D | Vertical Active : Vertical Blanking (Tvbp) (upper 4:4 bits) | 30 | 00110000 | |
| | 3E | Horizontal Sync, Offset (Thfp) = xxxx pixels | 30 | 00110000 | |
| | 3F | Horizontal Sync, Pulse Width = xxxx pixels | 20 | 00100000 | |
| | 40 | Vertical Sync, Offset (Tvfp) = xx lines Sync Width = xx lines | 25 | 00100101 | |
| | 41 | Horizontal Vertical Sync Offset/Width upper 2 bits | 00 | 00000000 | |
| | 42 | Horizontal Image Size =xxx mm | 61 | 01100001 | |
| | 43 | Vertical image Size = xxx mm | C6 | 11000110 | |
| | 44 | Horizontal Image Size / Vertical image size | 10 | 00010000 | |
| | 45 | Horizontal Border = 0 (Zero for Notebook LCD) | 00 | 00000000 | |
| | 46 | Vertical Border = 0 (Zero for Notebook LCD) | 00 | 00000000 | |
| | 47 | Bit[7] 0: Non-interlace, 1: Interlace Bit[6:5] 00: Normal display, no stereo, XX: See table xx for definition Bit[4:3] 00: Analog composite, 01: Bipolar analog composite, 10: Digital composite, 11: Digital separate Bit[2:1] :The interpretation of bits 2 and 1 is dependent on the decode of bits 4 and 3 - see Table 3.18. Bit[0] :See Table VESA EDID spec for definition Referenced Default = 1Ah | 1A | 00011010 | |
| | Timing Descriptor #2 | 48 | Pixel Clock/10,000 (LSB) | 41 | 01000001 |
| | | 49 | Pixel Clock/10,000 (MSB) | 1C | 00011100 |
| 4A | | Horizontal Active = xxxx pixels (lower 8 bits) | 56 | 01010110 | |
| 4B | | Horizontal Blanking (Thbp) = xxxx pixels (lower 8 bits) | A0 | 10100000 | |
| 4C | | Horizontal Active/Horizontal blanking (Thbp) (upper 4:4 bits) | 50 | 01010000 | |
| 4D | | Vertical Active = xxxx lines | 00 | 00000000 | |
| 4E | | Vertical Blanking (Tvbp) = xxxx lines (DE Blanking typ. for DE only panels) | 16 | 00010110 | |
| 4F | | Vertical Active : Vertical Blanking (Tvbp) (upper 4:4 bits) | 30 | 00110000 | |
| 50 | | Horizontal Sync, Offset (Thfp) = xxxx pixels | 30 | 00110000 | |
| 51 | | Horizontal Sync, Pulse Width = xxxx pixels | 20 | 00100000 | |
| 52 | | Vertical Sync, Offset (Tvfp) = xx lines Sync Width = xx lines | 25 | 00100101 | |
| 53 | | Horizontal Vertical Sync Offset/Width upper 2 bits | 00 | 00000000 | |
| 54 | | Horizontal Image Size =xxx mm | 58 | 01011000 | |
| 55 | | Vertical image Size = xxx mm | C2 | 11000010 | |
| 56 | | Horizontal Image Size / Vertical image size | 10 | 00010000 | |
| 57 | Horizontal Border = 0 (Zero for Notebook LCD) | 00 | 00000000 | | |
| 58 | Vertical Border = 0 (Zero for Notebook LCD) | 00 | 00000000 | | |
| 59 | Bit[7] 0: Non-interlace, 1: Interlace Bit[6:5] 00: Normal display, no stereo, XX: See table xx for definition Bit[4:3] 00: Analog composite, 01: Bipolar analog composite, 10: Digital composite, 11: Digital separate Bit[2:1] :The interpretation of bits 2 and 1 is dependent on the decode of bits 4 and 3 - see Table 3.18. Bit[0] :See Table VESA EDID spec for definition Referenced Default = 1Ah | 1A | 00011010 | | |

Samsung Secret

Approval

| | | | | |
|---|--|--|----------|----------|
| Timing Descriptor #3 Dell specific information | 5A | Flag | 00 | 00000000 |
| | 5B | Flag | 00 | 00000000 |
| | 5C | Flag | 00 | 00000000 |
| | 5D | Data Type Tag: Alphanumeric Data String (ASCII) | FE | 11111110 |
| | 5E | Flag | 00 | 00000000 |
| | 5F | Dell P/N 1 st Character | 43 | 01000011 |
| | 60 | Dell P/N 2 nd Character | 39 | 00111001 |
| | 61 | Dell P/N 3 rd Character | 37 | 00110111 |
| | 62 | Dell P/N 4 th Character | 30 | 00110000 |
| | 63 | Dell P/N 5 th Character | 4A | 01001010 |
| | 64 | LCD Supplier EEDID Revision # Bit[7] : 0=X, 1=A Bit[6:0] : 00, 01, 02... for SST 10, 11, 12... for PT 20, 21, 22... for ST 00, 01, 02... for X-Build (if Bit[7]=1) | 80 | 10000000 |
| | 65 | Manufacturer P/N | 31 | 00110001 |
| | 66 | Manufacturer P/N | 35 | 00110101 |
| | 67 | Manufacturer P/N | 36 | 00110110 |
| | 68 | Manufacturer P/N | 41 | 01000001 |
| | 69 | Manufacturer P/N | 54 | 01010100 |
| 6A | Manufacturer P/N | 0A | 00001010 | |
| 6B | Manufacturer P/N (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 | |
| Timing Descriptor #4 | 6C | Flag | 00 | 00000000 |
| | 6D | Flag | 00 | 00000000 |
| | 6E | Flag | 00 | 00000000 |
| | 6F | Data Type Tag: Manufacturer Specified Data 00 | 00 | 00000000 |
| | 70 | Flag | 00 | 00000000 |
| | 71 | SMBUS Value = XX nits | 00 | 00000000 |
| | 72 | SMBUS Value = XX nits | 00 | 00000000 |
| | 73 | SMBUS Value = XX nits | 00 | 00000000 |
| | 74 | SMBUS Value = XX nits | 00 | 00000000 |
| | 75 | SMBUS Value = XX nits | 00 | 00000000 |
| | 76 | SMBUS Value = XXX nits | 00 | 00000000 |
| | 77 | SMBUS Value = XXX nits | 00 | 00000000 |
| | 78 | SMBUS Value = max nits (Typically = 00h, XXX nits) | 00 | 00000000 |
| | 79 | Bit[7:3] Reserved Bit[2] 0: No RTC support, 1: RTC support Bit[1:0] 00: reserved, 01: single LVDS, 10: dual LVDS, 11: reserved 01h single channel LVDS, no RTC support 02h dual channel LVDS, no RTC support 05h single channel LVDS, with RTC support 06h dual channel LVDS, with RTC support | 01 | 00000001 |
| | 7A | BIST Enable: Yes = '01' No = '00' | 01 | 00000001 |
| | 7B | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 0A | 00001010 |
| 7C | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 | |
| 7D | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 | |
| Checksum | 7E | Extension flag (# of optional 128 EDID extension blocks to follow, Typ = 0) | 00 | 00000000 |
| | 7F | Checksum (The 1-byte sum of all 128 bytes in this EDID block shall = 0) | 3E | 00111110 |

Samsung Secret

| | | | | | |
|---------|--------------|--------|-----------------|------|---------|
| Doc.No. | LTN156AT02-D | Rev.No | 04-A01-S-081205 | Page | 30 / 30 |
|---------|--------------|--------|-----------------|------|---------|