

DESCRIPTION

Brightking's LTS08A06L02 transient voltage suppressor is designed to protect components which are connected to high speed data and telecommunication lines from voltage surges caused by electrostatic discharge (ESD), electrical fast transients (EFT), and lightning. TVS diodes are ideal for use as board level protection of sensitive semiconductor components. The LTS08A06L02 combines a TVS diode with a rectifier bridge to provide transient protection in both common and differential mode with a single device.

The capacitance of the device is minimized (15pF) to ensure correct signal transmission on high speed lines. Brightking's LTS08A06L02 meets the short-haul (intra-building) transient immunity requirements of Bellcore 1089 for telecommunications applications. Such as:

Bellcore 1089 (intra-Building) 100A (2/20 μ s)

ITU K.20 $I_{PP} = 40A$ (5/310 μ s)

IEC 61000-4-2 (ESD) $\pm 15KV$ (air), $\pm 8KV$ (contact)

IEC 61000-4-2 (EFT) 40A (5/50ns)

IEC 61000-4-2 (Lightning) 100A (8/20 μ s)





HBM : $\pm 8kV$
Air Mode : $\pm 15kV$




SPECIFICATION FEATURES

- IEC61000-4-2 ESD 15KV Air, 8KV contact compliance
- SOIC-08 surface mount package
- Protects two high-speed data lines
- Array of surge rated, low capacitance diodes
- Low clamping voltage
- Low leakage current
- Solid-state silicon avalanche technology
- Lead Free/RoHS compliant

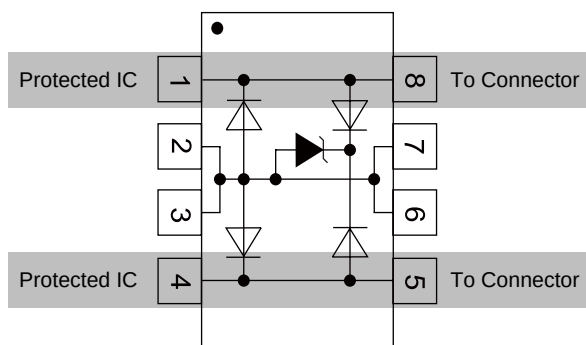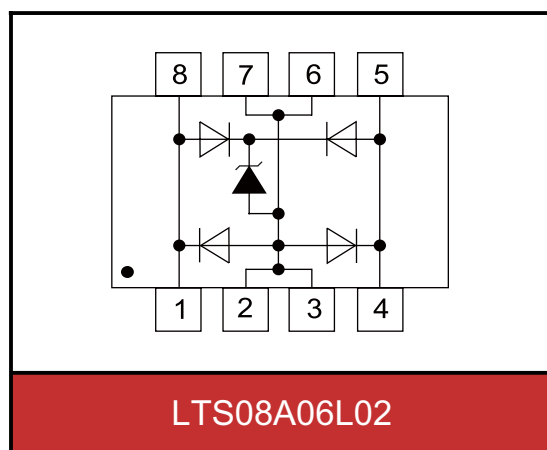

Protection --- Line to Line (Differential Mode)

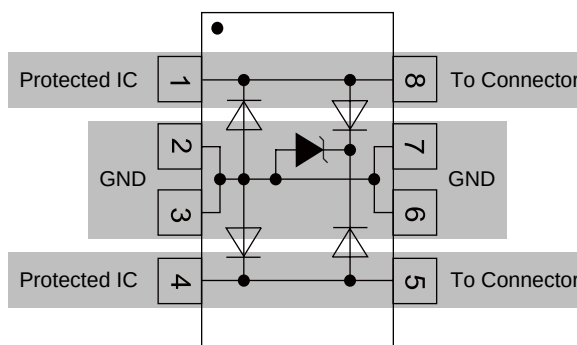

Protection --- Line to GND (Common Mode)

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Forward current (tp=8/20μs waveform)	P _{PK}	2000	W
Peak Pulse current (tp=8/20μs waveform)	I _{PP}	100	A
ESD voltage (HBM contact)	V _{ESD}	±8	KV
ESD voltage (AIR contact)		±15	
Lead soldering temperature	T _L	260 (10 sec.)	°C
Storage & operating temperature range	T _{STG} ,T _J	-55~+150	°C

ELECTRICAL CHARACTERISTICS (T_J=25°C)

LTS08A06L02 (Marking : B LC06 or LC03-6)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V _{RWM}				6	V
Reverse breakdown voltage	V _{BR}	I _{BR} =1mA	6.8			V
Reverse leakage current	I _R	V _R =6V			20	μA
Clamping voltage (tp=8/20μs)	V _C	I _{PP} =50A Line to Ground			15	V
Clamping voltage (tp=8/20μs)	V _C	I _{PP} =50A Line to Line			18	V
Clamping voltage (tp=8/20μs)	V _C	I _{PP} =100A Line to Ground			20	V
Clamping voltage (tp=8/20μs)	V _C	I _{PP} =100A Line to Line			24	V
Off state junction capacitance (V _R =0V,f=1MHz)	C _J	between I/O pins and GND		15	30	pF
		between I/O pins		12	30	pF

TYPICAL CHARACTERISTICS CURVES

Figure 1. Power Derating Curve

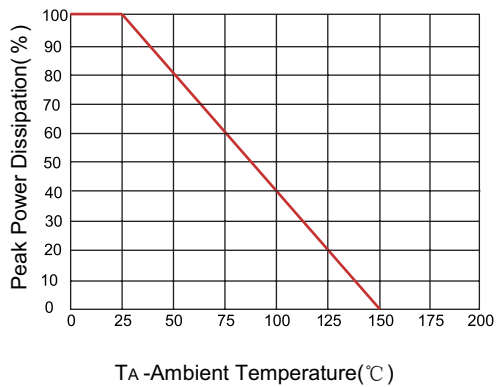


Figure 2. Pulse Waveforms

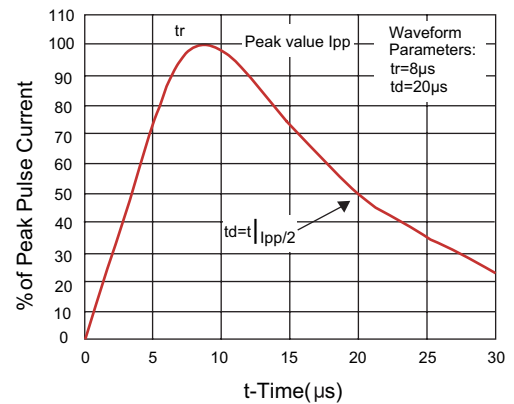


Figure 3. Non-Repetitive Peak Pulse vs Pulse Time

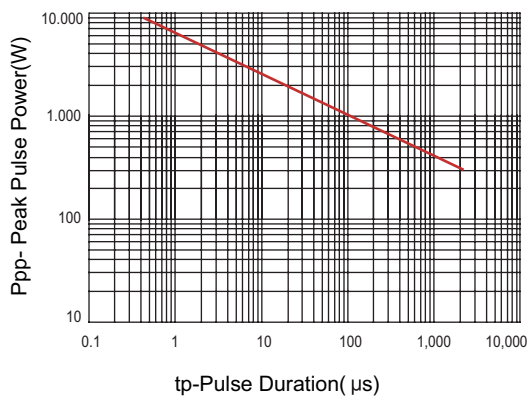


Figure 4. Capacitance vs. Reverse Voltage





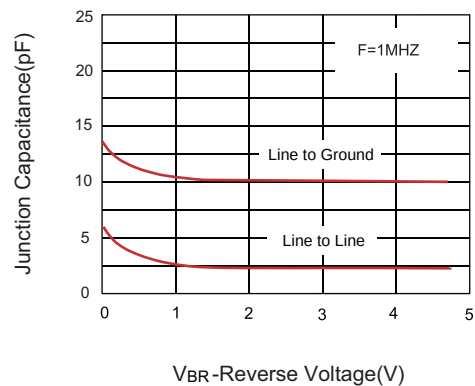


Figure 5. Clamping Voltage vs. Peak Pulse Current

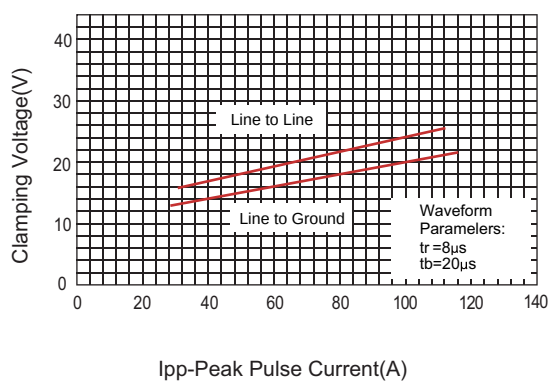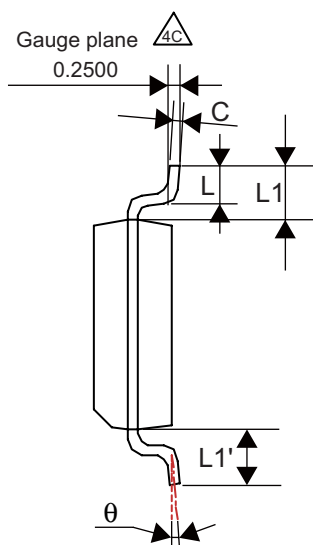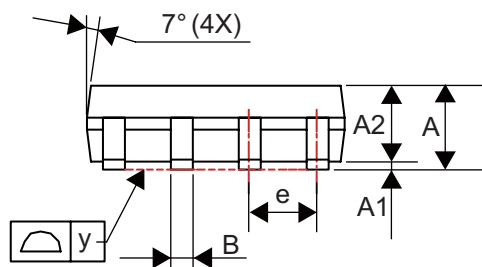

PACKAGE AND SUGGESTED PAD LAYOUT DIMENSION

SOIC-08 (unit:mm)

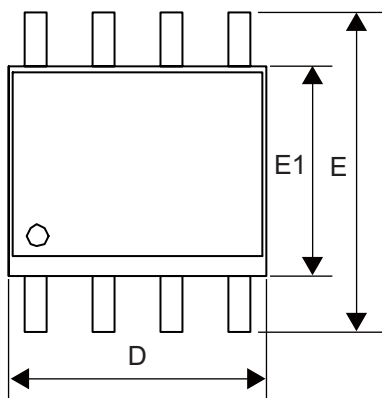

DIMENSIONS						
SYMBOL	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.053	0.063	0.069	1.35	1.60	1.75
A1	0.004	-	0.010	0.10	-	0.25
A2	-	0.057	-	-	1.45	-
B	0.013	-	0.020	0.33	-	0.51
C	0.007	-	0.010	0.19	-	0.25
D	0.189	-	0.197	4.80	-	5.00
E1	0.150	0.153	0.157	3.80	3.90	4.00
e	-	0.050	-	-	1.27	-
E	0.228	0.236	0.244	5.80	6.00	6.20
L	0.016	-	0.050	0.40	-	1.27
y	-	-	0.004	-	-	0.10
θ	0°	-	8°	0°	-	8°
L1-L1'	-	-	0.005	-	-	0.12
L1	0.041REF			1.04REF		

