

Photocoupler
Product Data Sheet
LTV-8062

Spec No. :DS70-2017-0055
Effective Date: 05/17/2019
Revision: B

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

Photocoupler LTV-806X series

1. DESCRIPTION

1.1 Features

- Isolation voltage between input and output Viso : 5,000 Vrms
- 4pin DIP Zero-cross photocoupler, triac driver output
- High repetitive peak off-state voltage V_{DRM} : Min. 600V
- High critical rate of rise of off-state voltage (dV/dt : MIN. 1000V / μs)
- Safety approval
UL 1577
VDE DIN EN60747-5-5 (VDE 0884-5)
cUL CA5A
CQC GB4943.1-2011/ GB8898-2011 (meet Altitude up to 5000m)
Nordic Safety (DEMKO)


1.2 Applications

- AC Motor Drives
- AC Motor Starters
- E.M. Contactors
- Lighting Controls
- Solenoid/Valve Controls
- Solid State Relays
- Static Power Switches
- Temperature Controls


Photocoupler LTV-806X series

2. PACKAGE DIMENSIONS


2.1 LTV-806X

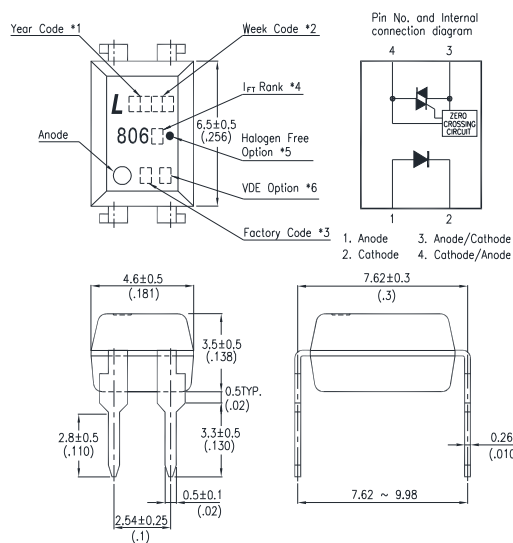

2.2 LTV-806XM

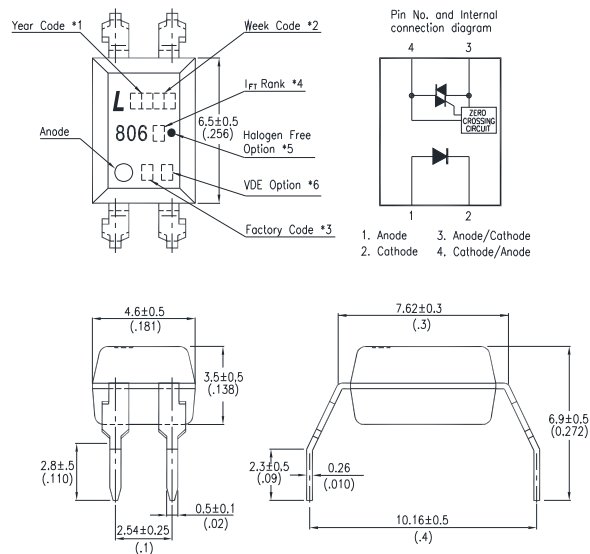

2.3 LTV-806XS

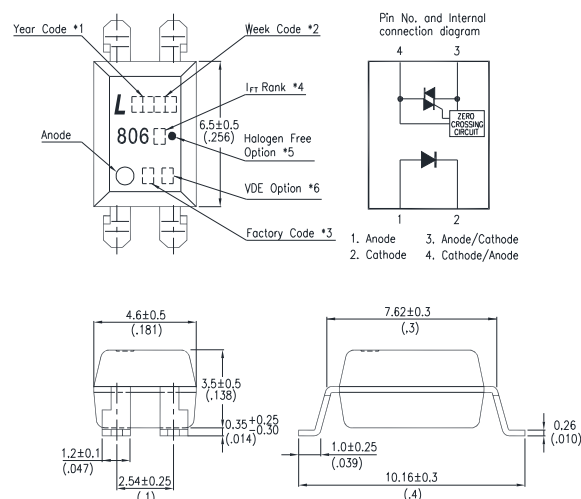

Notes :


1. 2-digit year code, example : 2016 = 16
2. 2-digit work week ranging from '01' to '53'
3. Factory identification mark shall be marked (W: China-CZ, Y: Thailand)
4. I_{FT} Rank
5. "●" for halogen free option.
6. "4" or "V" for VDE option.

*Dimensions in millimeters (inches).


Photocoupler LTV-806X series

3. TAPING DIMENSIONS

3.1 LTV-806XS-TA

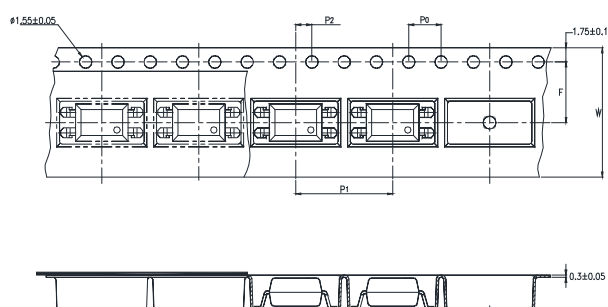

3.2 LTV-806XS-TA1

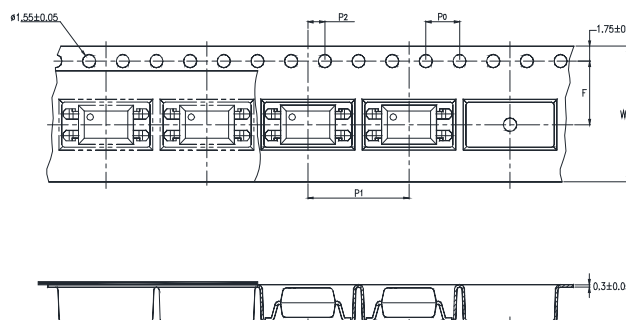


Description	Symbol	Dimension in mm (inch)
Tape wide	W	16±0.3 (0.63)
Pitch of sprocket holes	P ₀	4±0.1 (0.15)
Distance of compartment	F	7.5±0.1 (0.295)
	P ₂	2±0.1 (0.079)
Distance of compartment to compartment	P ₁	12±0.1 (0.472)

3.3 Quantities Per Reel

Package Type	TA/TA1
Quantities (pcs)	1000

Photocoupler LTV-806X series

3.4 LTV-806XS-TP

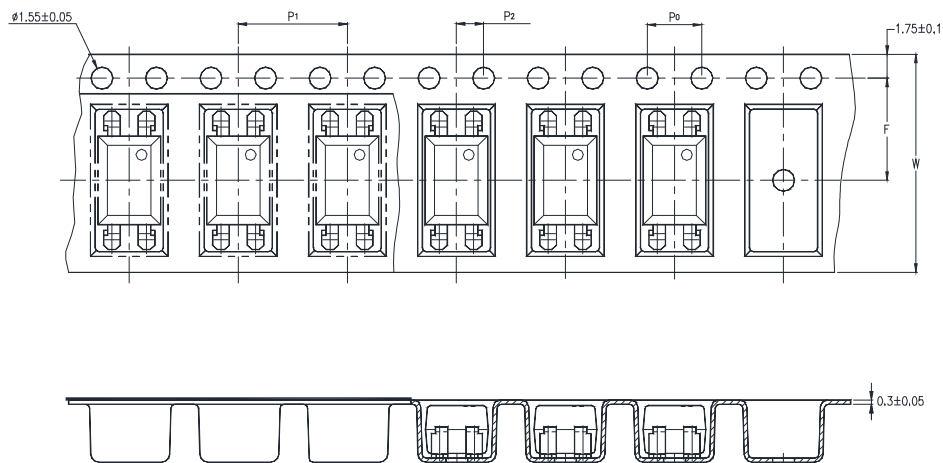

Description	Symbol	Dimension in mm (inch)
Tape wide	W	16±0.3 (0.63)
Pitch of sprocket holes	P ₀	4±0.1 (0.15)
Distance of compartment	F	7.5±0.1 (0.295)
	P ₂	2±0.1 (0.079)
Distance of compartment to compartment	P ₁	8±0.1 (0.472)

3.5 Quantities Per Reel

Package Type	TP
Quantities (pcs)	2000

Photocoupler LTV-806X series

4. RATING AND CHARACTERISTICS

4.1 Absolute Maximum Ratings at Ta=25°C

	Parameter	Symbol	Rating	Unit
Input	Forward Current	I_F	50	mA
	Reverse Voltage	V_R	6	V
	Power Dissipation	P_D	120	mW
	Junction Temperature	T_J	125	°C
Output	Off-State Output Terminal Voltage	V_{DRM}	600	V
	On-State RMS Current	$I_{D(RMS)}$	100	mA
	Peak Repetitive Surge Current (PW=100μs, 120pps)	V_{TSM}	1	A
	Output Power Dissipation	P_O	300	mW
	Junction Temperature	T_J	125	°C
	Total Power Dissipation	P_{tot}	330	mW
*1.	Isolation Voltage	V_{ISO}	5000	V_{rms}
	Ambient Operating Temperature Range	T_A	-55 ~ +110	°C
	Storage Temperature	T_{stg}	-55 ~ +150	°C
*2.	Soldering Temperature	T_L	260	°C

*1. AC For 1 Minute, R.H. = 40 ~ 60%

Isolation voltage shall be measured using the following method.

(1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.

(2) The isolation voltage tester with zero-cross circuit shall be used.

(3) The waveform of applied voltage shall be a sine wave.

*2. For 10 Seconds

Photocoupler LTV-806X series

4.2 Recommended Operating Conditions (Note)

Characteristics		Symbol	Min.	Typ.	Max.	Unit
Supply Voltage		V_{AC}	-	-	240	Vac
Forward Current	LTV-8061	I_F	22.5	25	30	mA
	LTV-8062		15	20	30	mA
	LTV-8063		7.5	10	30	mA
Operating Temperature		T_{opr}	-25	-	85	°C

Note: Recommended operating conditions are given as a design guideline to obtain expected performance of the device.

Additionally, each item is an independent guideline respectively. In developing designs using this product, please confirm specified characteristics shown in this document.

Photocoupler LTV-806X series

4.2 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

Parameter			Symbol	Min.	Typ.	Max.	Unit	Test Condition
Input	Forward Voltage		V_F	—	1.2	1.4	V	$I_F=20\text{mA}$
	Reverse Current		I_R	—	—	10	μA	$V_R=3\text{V}$
Output	*1 Peak Blocking Current, Either Direction		I_{DRM}	—	—	1	μA	$V_{DRM}=600\text{V}$
	Peak On-State Voltage, Either Direction		V_{TM}	—	—	3.0	V	$I_{TM}=100\text{ mA Peak}$
	*2 Critical Rate of Rise of Off-State Voltage		dv/dt	1000	—	—	$\text{V}/\mu\text{s}$	
COUPLED	Led Trigger Current, Current Required to Latch Output, Either Direction	LTV-8061	I_{FT}	—	—	15	mA	Main Terminal Voltage = 3V
		LTV-8062		—	—	10		
		LTV-8063		—	—	5		
	Holding Current, Either Direction		I_H	—	200	—	μA	
ZERO CROSSING	Inhibit Voltage		V_{INH}	—	5	20	Volts	$I_F=\text{Rated } I_{FT}$, MT1-MT2 Voltage above which device will not trigger
	Leakage in Inhibited State		I_{DRM2}	—	—	500	μA	$I_F = \text{Rated } I_{FT}$, Rated V_{DRM} , Off State

*1 Test voltage must be applied within dv/dt rating.

*2 This is static dv/dt . Commutating dv/dt is a function of the load-driving thyristor(s) only.

Photocoupler LTV-806X series

5. CHARACTERISTICS CURVES (TYPICAL PERFORMANCE)

Fig.1 Forward Current vs.
Ambient Temperature

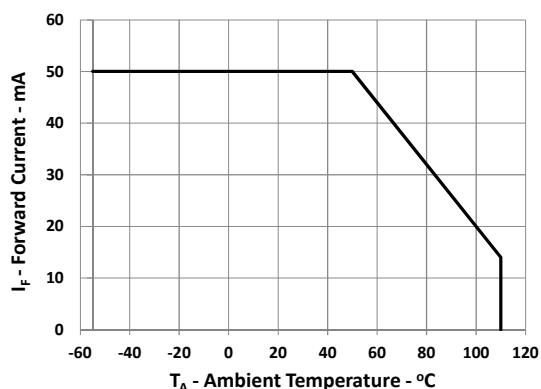


Fig.2 On-state Current vs. Ambient
Temperature

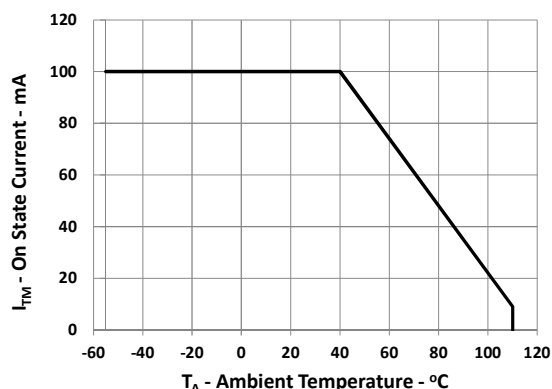


Fig.3 Normalized Trigger Current
vs Ambient Temperature

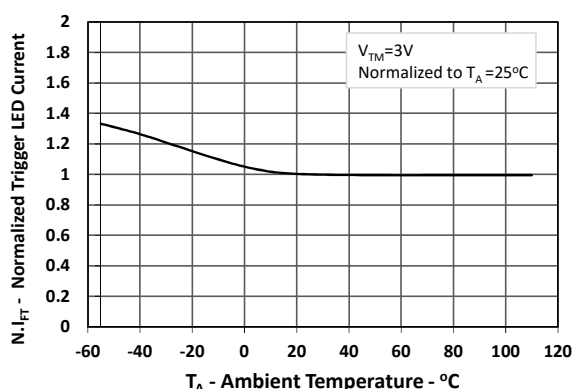


Fig.4 Forward Current vs. Forward
Voltage

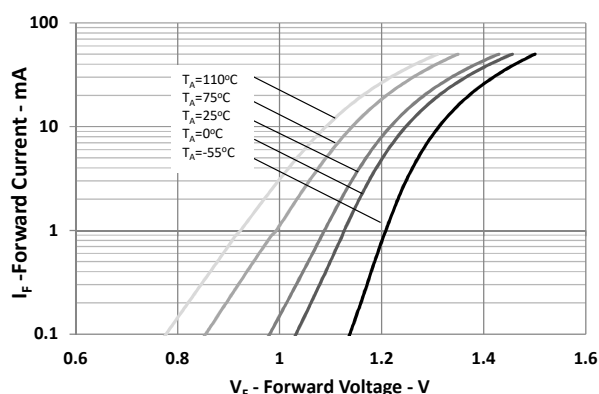


Fig.5 Normalized On-state Voltage
vs Ambient Temperature


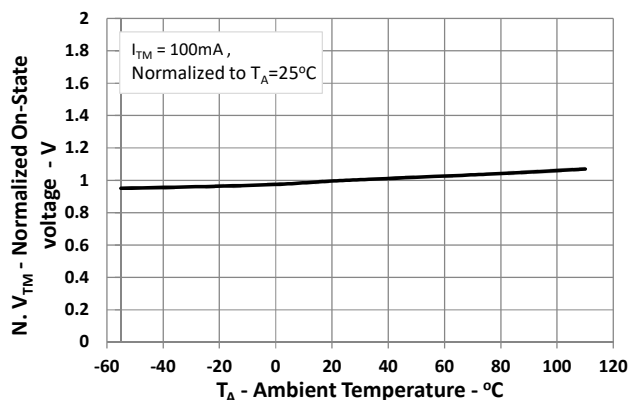


Fig.6 Normalized Holding Current
vs Ambient Temperature

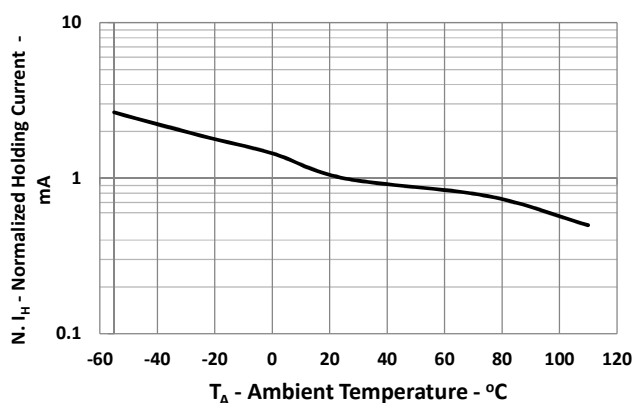

Photocoupler LTV-806X series

Fig.7 Off-state Current vs
Ambient Temperature

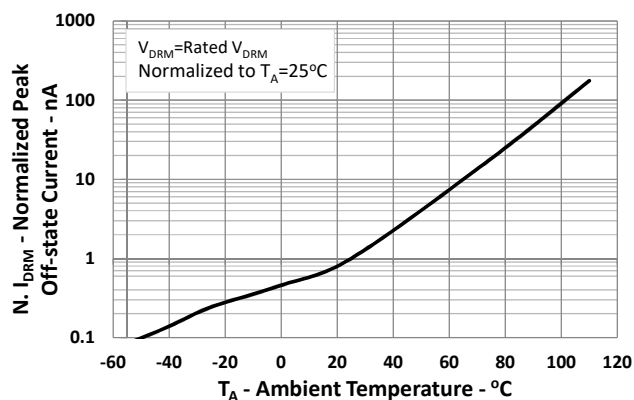


Fig.8 On-state Current vs
On-state Voltage

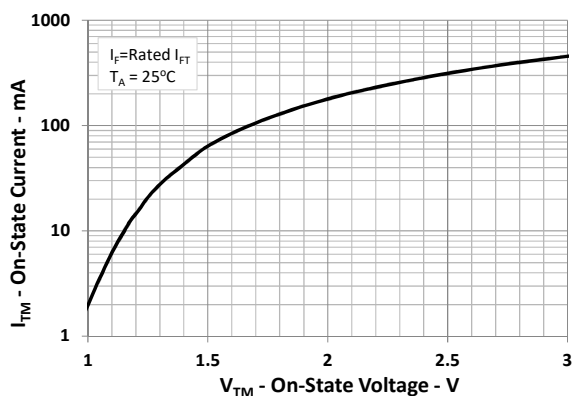


Fig.9 Leakage in Inhibited State vs
Ambient Temperature


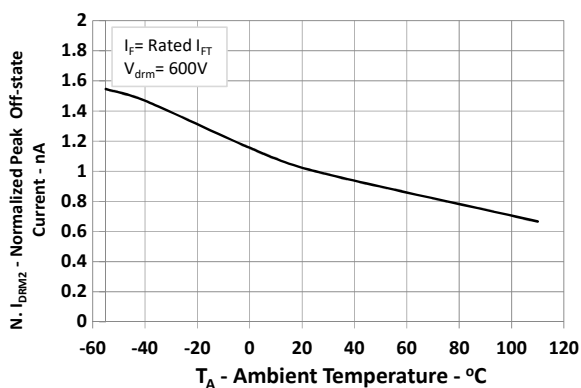


Fig.10 Inhibit Voltage vs
Ambient Temperature

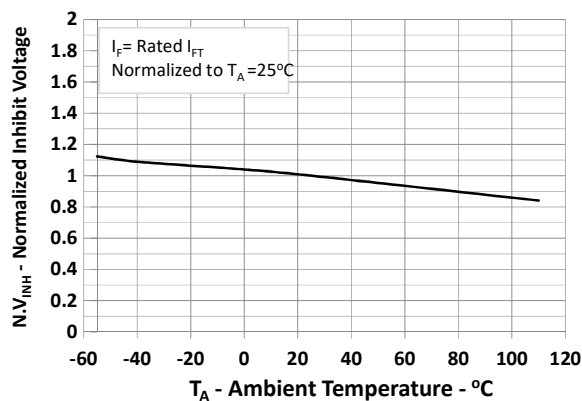


Photocoupler LTV-806X series

6. TEMPERATURE PROFILE OF SOLDERING

6.1 IR Reflow soldering (JEDEC-STD-020E compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.

Profile item	Conditions
Preheat	
- Temperature Min (T_{Smin})	150°C
- Temperature Max (T_{Smax})	200°C
- Time (min to max) (t_s)	90±30 sec
Soldering zone	
- Temperature (T_L)	217°C
- Time (t_L)	60 sec
Peak Temperature (T_P)	260°C
Ramp-up rate	3°C / sec max.
Ramp-down rate	3~6°C / sec

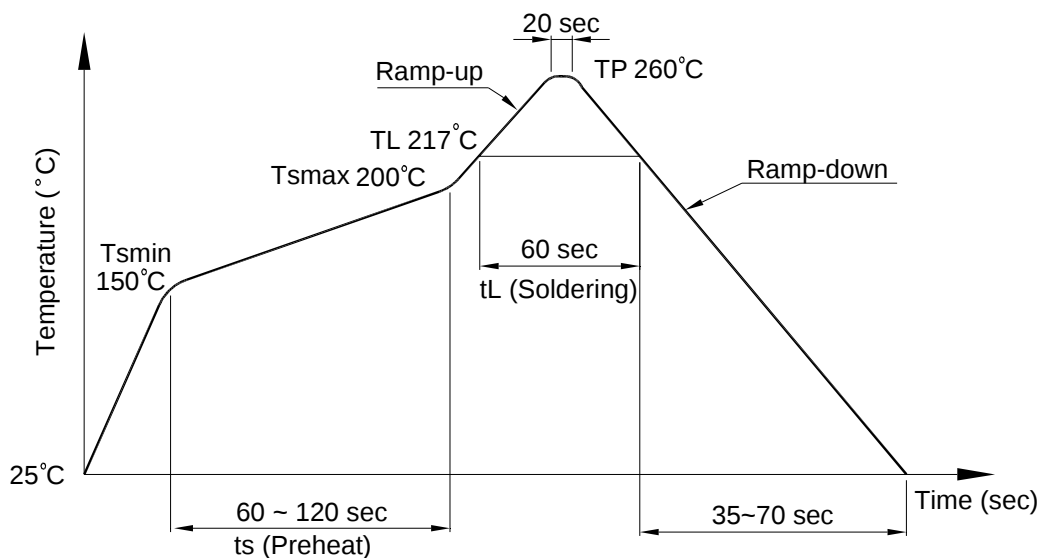

Photocoupler LTV-806X series

6.2 Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature: $260 \pm 0/-5^{\circ}\text{C}$

Time: 10 sec.

Preheat temperature: 25 to 140°C

Preheat time: 30 to 80 sec.

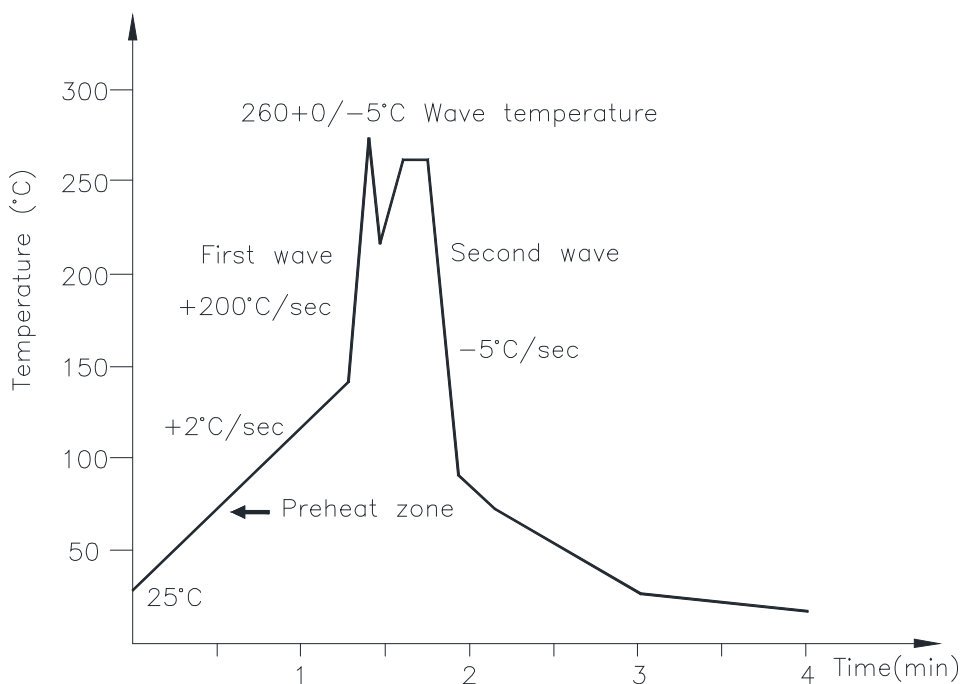

6.3 Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.


Temperature: $380 \pm 0/-5^{\circ}\text{C}$

Time: 3 sec max.

Photocoupler LTV-806X series

7. RRECOMMENDED FOOT PRINT PATTERNS (MOUNT PAD)

Unit: mm

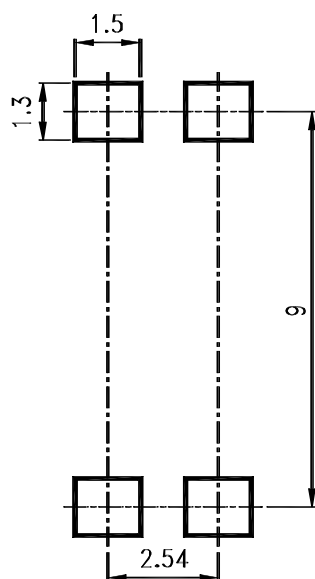

Photocoupler LTV-806X series

8. NAMING RULE

LTV-806(X)(X)-(X)-G

(1) DEVICE PART NUMBER

(2) I_{FT} Rank

(3) FORM TYPE (S, M or none)

(4) TAPING TYPE (TA,TA1,TP)

Please refer to orientation of taping on Page 3

(5) Halogen free option

Example : LTV-8061S-TA-G

LTV 806(X)(X)(X)-V-G

(1) DEVICE PART NUMBER

(2) I_{FT} Rank

(3) FORM TYPE (S, M or none)

(4) TAPING TYPE (TA,TA1,TP)

Please refer to orientation of taping on Page 3

(5) VDE option

(6) Halogen free option

Example : LTV8061STA-V-G

9. NOTES

- LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.
- The contents described herein are subject to change without prior notice.
- Immerge unit's body in solder paste is not recommended.