

**Features:**

- High speed response.
- High reliability and long life.
- Low power consumption.
- Available in red,blue,white ,green, yellow colors.
- Suitable for pulse operation.



www.DataSheet4U.com

**Descriptions:**

- The LED lamps are available with different colors,intensities,epoxy colors,etc.
- The series specially designed for applications requiring higher brightness.
- Superior performance in outdoor environment.


**Applications:**

- These lamp are widely used for various application.
- Board for display.
- Indication of all kinds.
- Traffic Signal.

**Selection Guide:**

Part No.	Chip		Lens Type
	Material	Emitting Color	
LUE50333	AlGaInP	High Super Red	Water Clear
LUY50333	AlGaInP	High Super Yellow	
LAG50333	AlGaInP	High Super Green	
LAM50333	AlGaInP	High Super Amber	

**Package Dimensions:**

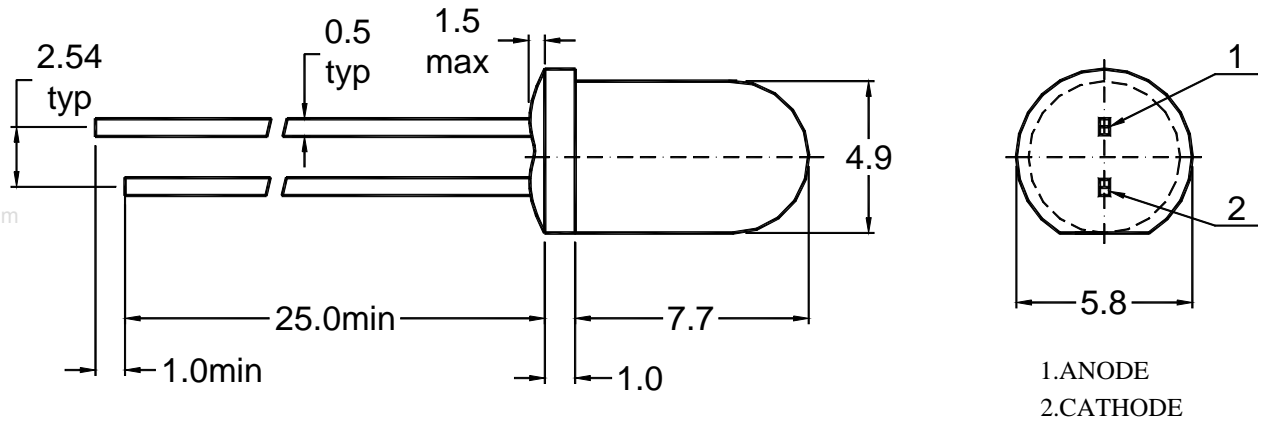

**NOTES :**

- 1、 All dimensions are in millimetres (mm).
- 2、 Tolerance is  $\pm 0.25\text{mm}(0.01\text{'})$  unless otherwise noted.
- 3、 Protruded resin under flange is 1.5mm Max LED.

**Absolute Maximum Rating ( Ta=25 )**

Parameter	Symbol	High Super				Unit
		Red	Yellow	Green	Amber	
Power Dissipation	$P_d$	70	70	70	70	mW
Pulse Forward Current (Duty 1/10 @ 1kHz)	$I_{FP}$	80	80	80	80	mA
Continuous Forward Current	$I_F$	25	25	25	25	mA
Reverse Voltage	$V_R$	5	5	5	5	V
Operating Temperature Range	$T_{opr}$	-30 ~ +85				
Storage Temperature Range	$T_{stg}$	-40 ~ +100				
Soldering Temperature	$T_{sol}$	260 $\pm$ 5				

**Notes :** Soldering time 5 seconds.







**Electrical Optical Characteristics ( Ta=25 )**

Parameter	Symbol	High Super								Unit	Test Condition
		Red		Yellow		Green		Amber			
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.		
Luminous Intensity	$I_V$	4500	--	5000	--	1500	--	3000	--	mcd	$I_F=20mA$
Forward Voltage	$V_F$	2.0	2.5	2.0	2.5	2.0	2.5	2.0	2.5	V	$I_F=20mA$
Reverse Current	$I_R$	--	50	--	50	--	50	--	50	$\mu A$	$V_R=5V$
Dominant Wavelength	$d$	625	--	590	--	570	--	605	--	nm	$I_F=20mA$
Peak Emission Wavelength	$p$	633	--	593	--	575	--	609	--	nm	$I_F=20mA$
Spectral Line Half Width		30	--	30	--	30	--	30	--	nm	$I_F=20mA$
Viewing Angle	$2_{1/2}$	15	--	15	--	15	--	15	--	deg	$I_F=20mA$


**Reliability Test Items and Conditions**

NO	Test Item	Test Conditions	Duration	Sample	Ac/Re
1	Temperature Cycle	-40 ~ 25 ~ 100 ~ 25 30min 5min 30min 5min	50cycles	100	0/1
2	High Temp. Storage	Ta=100	1000hours	100	0/1
3	Temp.& Humidity Test	Ta=85 RH=85%	1000hours	100	0/1
4	Low Temp. Storage	Ta=-40	1000hours	100	0/1
5	Operating Life Test	Ta=25 ± 5 DC IF=20mA	1000hours	100	0/1
6	Solder Heat	Tsol=260 ± 5 , 10s	1times	20	0/1

Typical Electro-Optical Characteristics Curves :

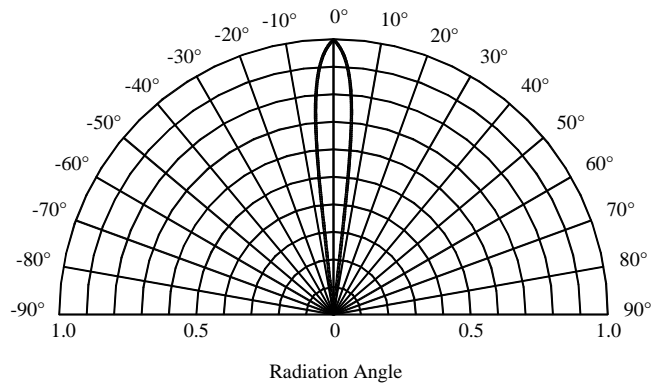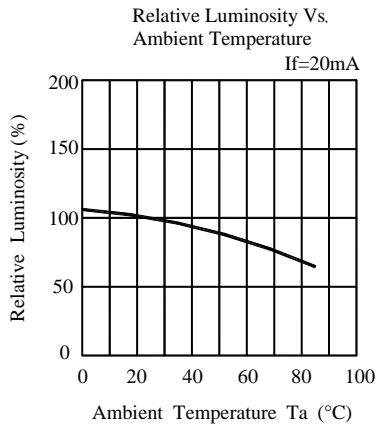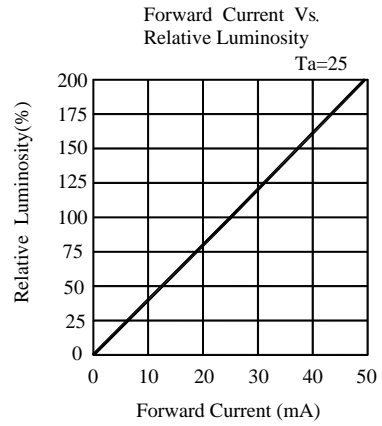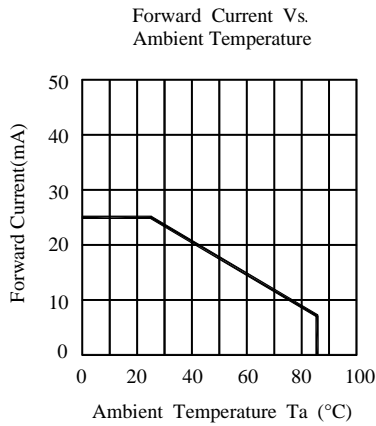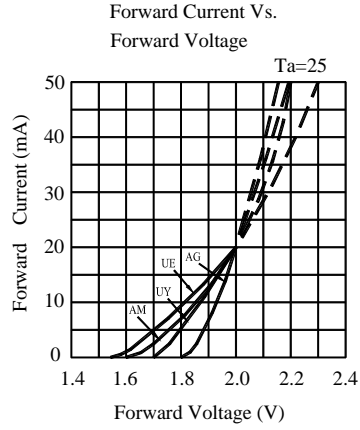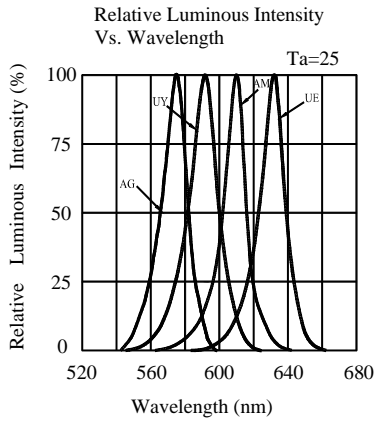

## Label Form Specification

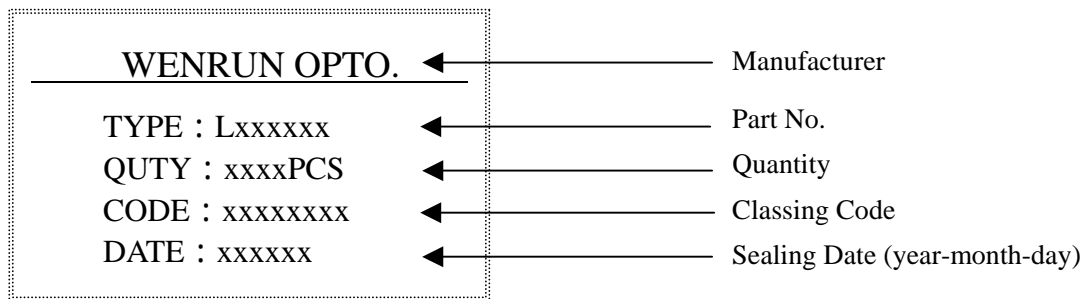

www.DataSheet4U.com

## Precautions In Use

### A、Soldering Conditions

- 1、 When soldering, leave the minimum clearance between the bottom of the resin and the soldering point.
- 2、 Maximum allowable soldering conditions are.  
Solder dipping: 260 max., 5 seconds max., one time.  
Soldering iron: 350 max., 5 seconds max., one time.
- 3、 Contact between molten solder and the resin must be avoided.
- 4、 In soldering, do not put any stress on the lead frame, particularly when heated.

### B、Lead frame Forming and Use

- 1、 When forming leads ,the leads should be bent at a point at least 3mm from the base of epoxy. Lead forming should be done before soldering.
- 2、 Do not apply any bending stress to the base of the lead. The stress to the base may damage the LEDs characteristics.
- 3、 When mounting the LEDs onto a printed circuit board ,the holes on the circuit board should be exactly aligned with the leads of the LEDs.
- 4、 Please avoid conditions which may cause the LED to corrode, tarnish or discolor. This corrosion or discoloration may cause difficulty during soldering operations. It is recommended that the LEDs be used as soon as possible.
- 5、 Please avoid rapid transitions in ambient temperature, especially, in high humidity environments.

## Notes:

- 1、 Above specification may be changed without notice. We will reserve authority on material change for above specification.
- 2、 When using this product, please observe the absolute maximum ratings and the instructions for the specification sheets. We assume no responsibility for any damage resulting from use of the product which does not comply with the instructions included in the specification sheets.