

Integrated EMI Filter & ESD Protection For Earpiece Speaker Ports
PRODUCTION DATA SHEET
DESCRIPTION

Proliferation of digital portable electronic equipment has created a noisy environment in which all devices become susceptible to Electromagnetic Interference (EMI). Interference from cell phone frequencies of 800-900 MHz and 1.9GHz as well as the growing wireless LAN frequencies of 2.4-6GHz can couple into the speaker port of a handheld device and adversely affect its performance. FCC Part 15 sets maximum allowable emission and immunity levels for all digital devices.

LX7205 is an integrated low pass filter with ESD protection that filters out the undesired frequencies as well as protecting the port against both positive and negative ESD voltages. The device is a 3x2 array flip chip and measures 1.5 x 1.0 x 0.65 mm. The small size and profile of this device is ideally suited for portable applications. The absence of leadframe and bondwires minimizes inductance and optimizes the high frequency filter performance. LX7205 exceeds the requirements of IEC61000-4-2 (15KV air discharge and 8KV contact discharge).

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

KEY FEATURES

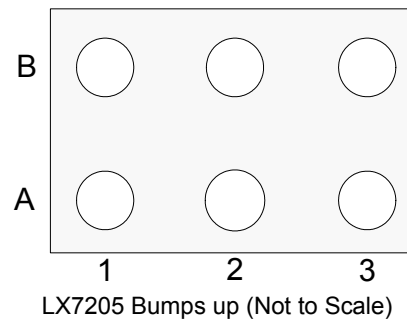
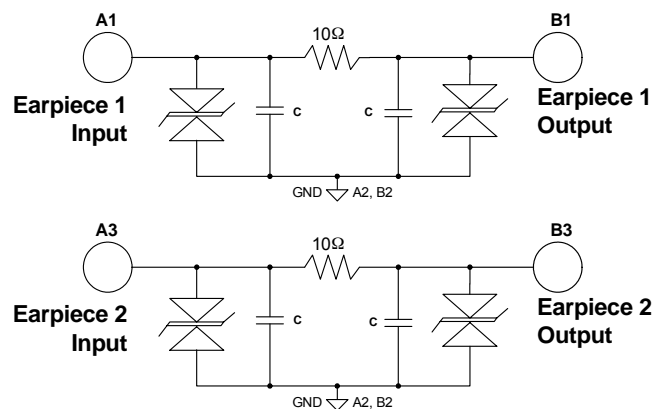
- Flip Chip construction
- Bi-directional EMI/RFI low-pass filter
- ESD protection with integrated line termination resistor
- Bi-directional TVS protects against negative ESD voltages in audio applications
- Low TVS operating voltage (5.0V)
- Low leakage current
- 0.5mm Pitch Chip Scale Package designed for direct assembly on FR4 PCB using conventional assembly techniques

BENEFITS

- Filter response characterized up to 6 GHz
- <2dB insertion loss in the pass band
- >20dB attenuation in the 800-900 MHz range
- >12dB attenuation in the WLAN frequencies of 2.4GHz and 5.0-6.0 GHz

APPLICATIONS

- Cell phones and Accessories
- Personal Digital Assistants (PDA's)
- Pagers
- MP3 Players
- Desktops and Notebook Computers
- Digital Camcorders

PRODUCT HIGHLIGHT
Device Schematic

PACKAGE ORDER INFO

| | | |
|------------|-----------|--------------------------------------|
| T_j (°C) | SP | 0.5mm Pitch Chip Scale Package (CSP) |
| -40 to 125 | | LX7205ISP |

Note: Available in Tape & Reel. Append the letters "TR" to the part number. (i.e. LX7205ISP-TR)

ABSOLUTE MAXIMUM RATINGS

| | |
|---|-----------------|
| Peak Pulse Power (tp = 8/20 μs) IEC61000-4-5 | 250W |
| Peak Pulse Current (tp = 8/20 μs) IEC61000-4-5 | 26A |
| ESD Air Discharge per IEC61000-4-2 | 30KV |
| ESD Contact Discharge per IEC61000-4-2 | 30KV |
| Operating Temperature | -40°C to +125°C |
| Storage Temperature Range..... | -55°C to +150°C |

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

PACKAGE PIN OUT


SP PACKAGE
(Bump Up Angle)

FUNCTIONAL PIN DESCRIPTION

| Name | Description |
|---------|---------------|
| A1 | Line 1 Input |
| B1 | Line 1 Output |
| A2 & B2 | Ground |
| A3 | Line 2 Input |
| B3 | Line 2 Output |

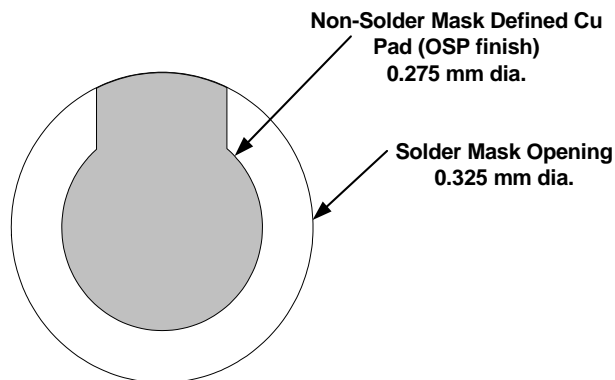
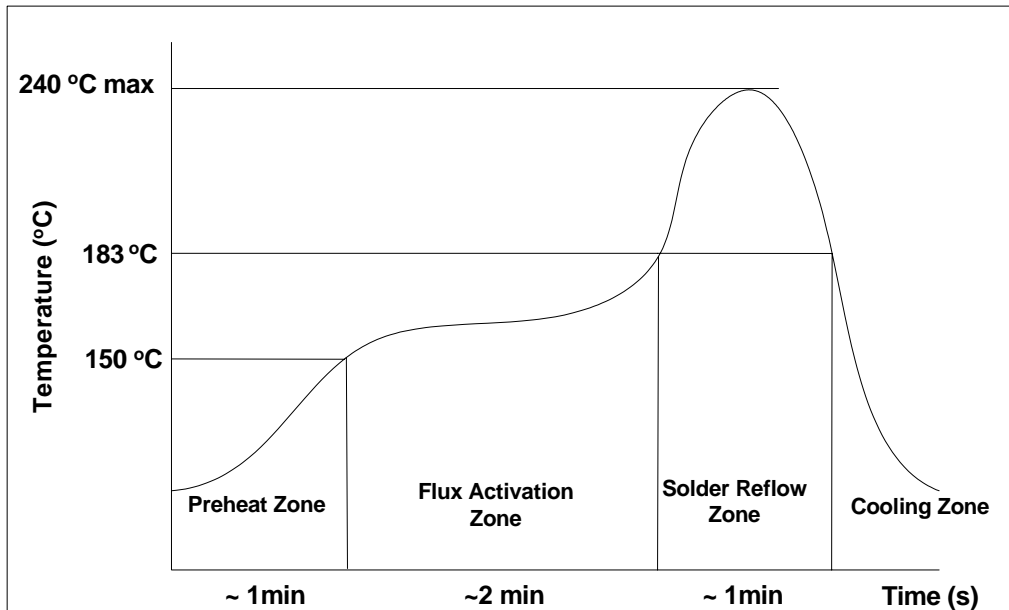
ELECTRICAL CHARACTERISTICS

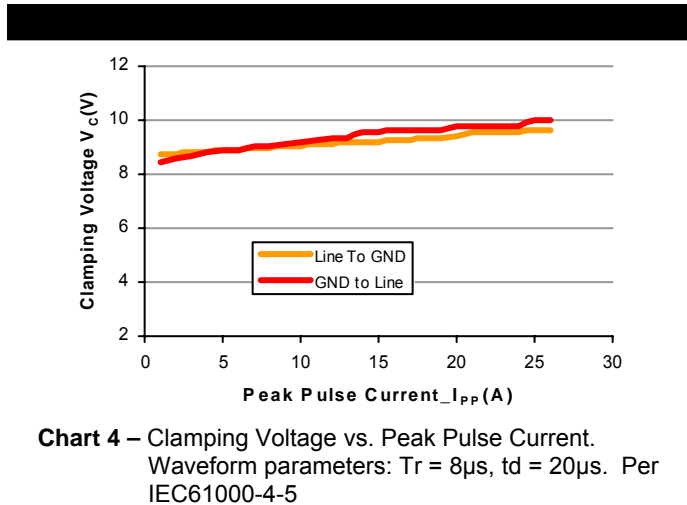
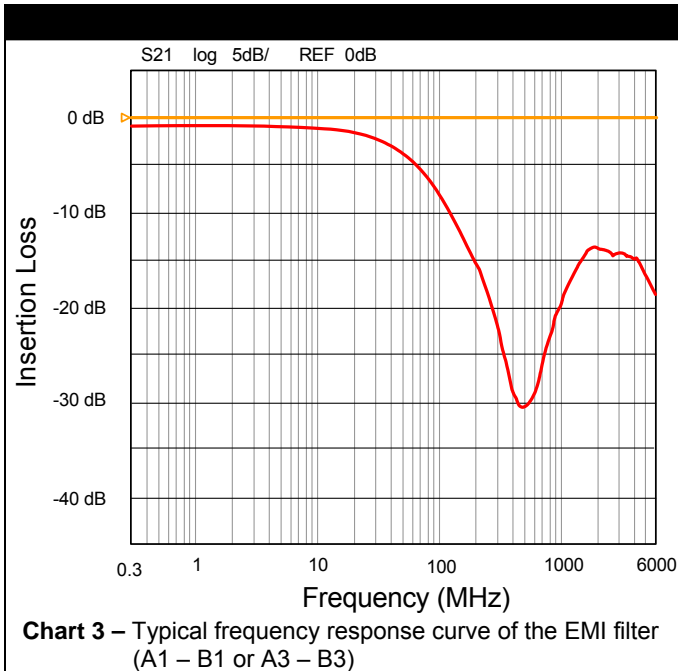
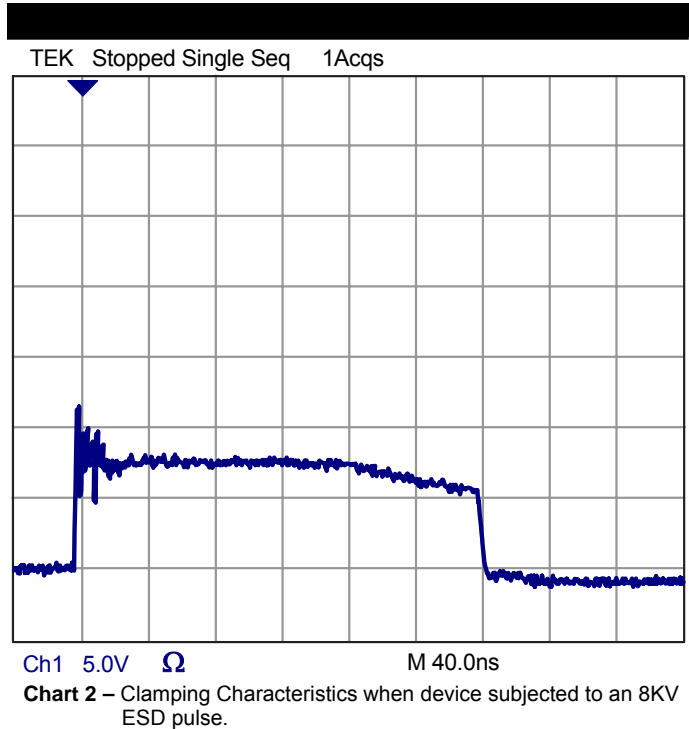
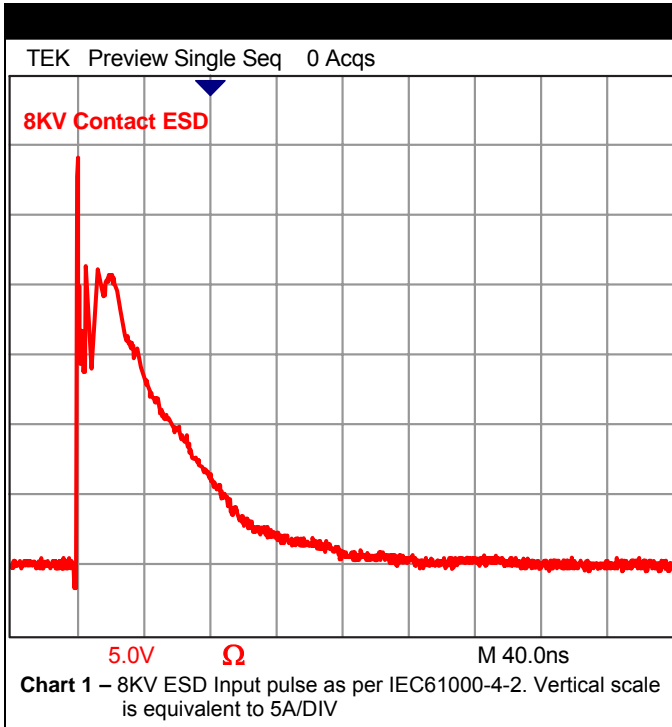
Unless otherwise specified, the following specifications apply over the operating ambient temperature $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ except where otherwise noted and the following test conditions:.

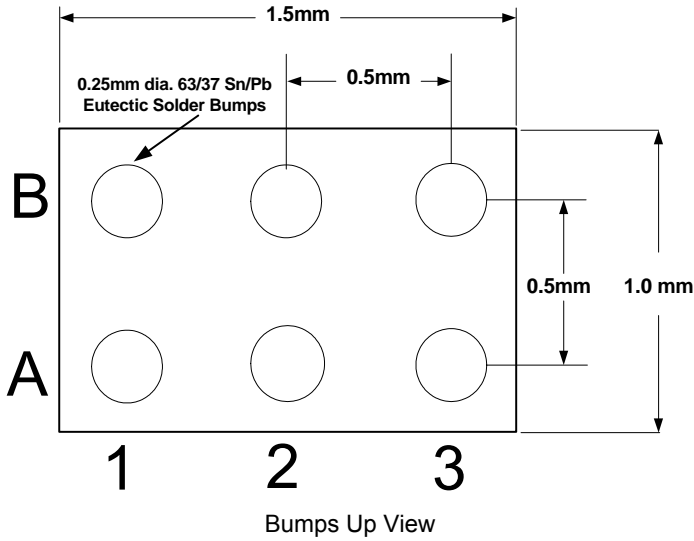
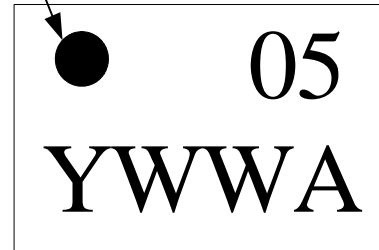
| Parameter | Symbol | Test Conditions | LX7205 | | | Units |
|-------------------------------|-------------|--|--------|-----|-----|-------|
| | | | Min | Typ | Max | |
| Stand-Off Voltage | V_{RWM} | | | | 5.0 | V |
| Breakdown Voltage | V_{BR} | $I_R = 1\text{mA}$ | 6 | | | V |
| Leakage Current | I_R | $VRWM = \pm 5.0\text{V}, T_A = 25^{\circ}\text{C}$ | -1 | | 1 | μA |
| Series Resistance, A1 to B1 | R_S | | 9 | 10 | 11 | Ω |
| Series Resistance, A3 to B3 | R_S | | 9 | 10 | 11 | Ω |
| Temperature Coefficient of RS | T_{COEFF} | Each Line | | 200 | | Ppm |
| Capacitor, A1 or B1 to GND | C | $V_R = 2.5\text{V}, f = 1\text{MHz}$ | 115 | 145 | 175 | pF |
| Capacitor, A3 or B3 to GND | C | $V_R = 2.5\text{V}, f = 1\text{MHz}$ | 115 | 145 | 175 | pF |

RECOMMENDED PCB PARAMETERS

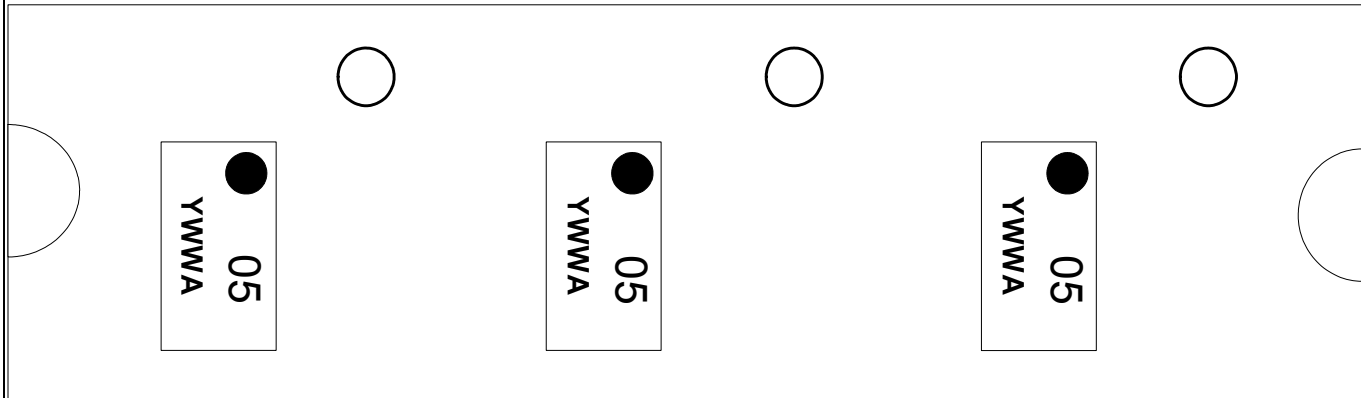
| Parameter | Value |
|-----------------------|---|
| Cu pad size | 0.275 +0.0/-0.025 mm |
| Pad Pitch | 0.5mm |
| Pad Definition | Non-Solder Mask Defined |
| Solder Mask Opening | 0.325 ± 0.025 mm |
| Solder Stencil | 0.25 x 0.25 mm square, 0.125 mm thick, laser cut, electro-polished |
| Pad Protective Finish | OSP (Organic Surface Preservative) |


Figure 1 – Recommended Non-Solder Mask Defined Pad

Figure 2 – Solder Reflow Profile. Max Temperature is 240°C and maximum time above liquious (183°C) is 60 seconds

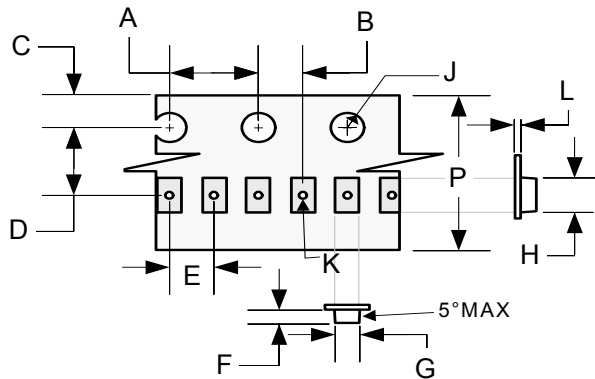


PACKAGE DIMENSIONS & MARKING
SP 0.5mm Chip Scale Package

Pin A1 Identification Mark


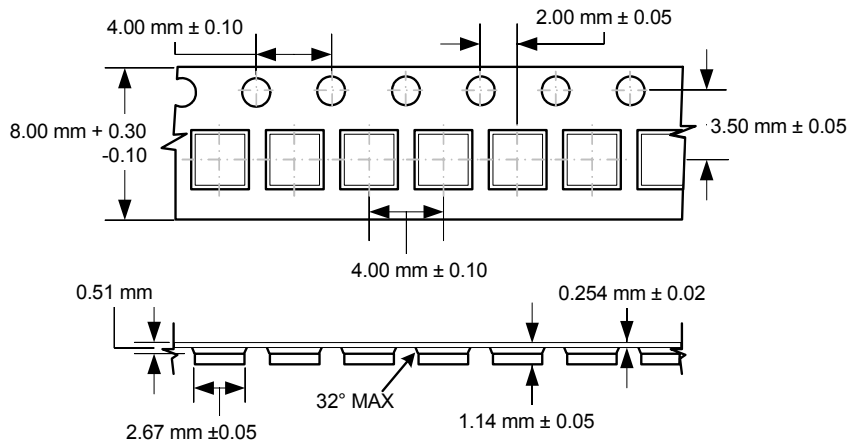
Y = Year | WW = Work Week | A = Lot Code
 SP Package – Bump Side Down



Part Orientation in Tape

TAPE SPECIFICATIONS


| Dim | MILLIMETERS | |
|-----|-------------|-------|
| | MIN | MAX |
| A | 3.90 | 4.10 |
| B | 1.95 | 2.05 |
| C | 1.65 | 1.85 |
| D | 3.45 | 3.55 |
| E | 1.90 | 2.10 |
| F | 0.67 | 0.77 |
| G | 1.03 | 1.13 |
| H | 1.75 | 1.85 |
| J | 1.40 | 1.60 |
| K | 0.45 | 0.55 |
| L | 0.252 | 0.256 |





Microsemi[®]

LX7205

**Integrated EMI Filter & ESD Protection For
Earpiece Speaker Ports**

PRODUCTION DATA SHEET

NOTES

PRODUCTION DATA – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.