



**鑫谷光电股份有限公司**  
**GOLDEN VALLEY OPTOELECTRONICS CO., LTD.**

---

# **SPECIFICATION FOR LED LAMP**

P/N : LY551C3E

Approved Sheet

www.DataSheet4U.com

<b>Designed by</b>	<b>Qualified by</b>	<b>Approved by Customer</b>

# LY551C3E


Spec. No. : GT-0210-09-093

## Features

- ◆ Standard T-1 3/4 Round package
- ◆ General purpose leads
- ◆ Viewing Angle : 30°

## Benefits

- ◆ High intensity
- ◆ Lower Power Consumption
- ◆ High Reliability and Firm and Solid
- ◆ Optimal Optical and Mechanical Design

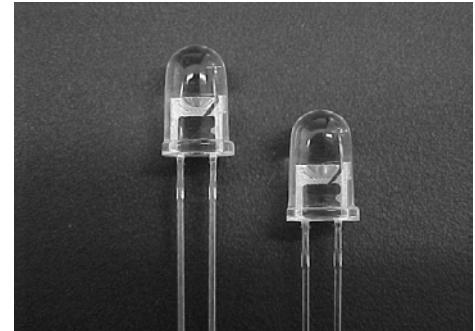


LED Picture

## Applications

- ◆ Electronic Signs and Signals
- ◆ Small Area Illumination
- ◆ General Purpose Indicators
- ◆ Legend Backlighting

## Description

- ◆ The T-1 3/4 round lamps are untinged, nondiffused . The precise optical design takes fine or special radiant pattern. This characteristic provides suitable viewing angle and helpful for special lighting function

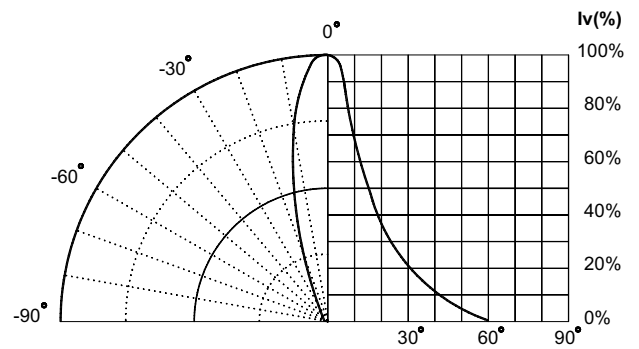

Beam Pattern


www.DataSheet4U.com

## Device Selection Guide

Part Number	Viewing Angle	Resin Color	LED Color	Material	Stand OFF
LY551C3E	30°	Water Clear	Yellow	AlGaInP/GaP	No

LY551C3E

## Package Dimensions

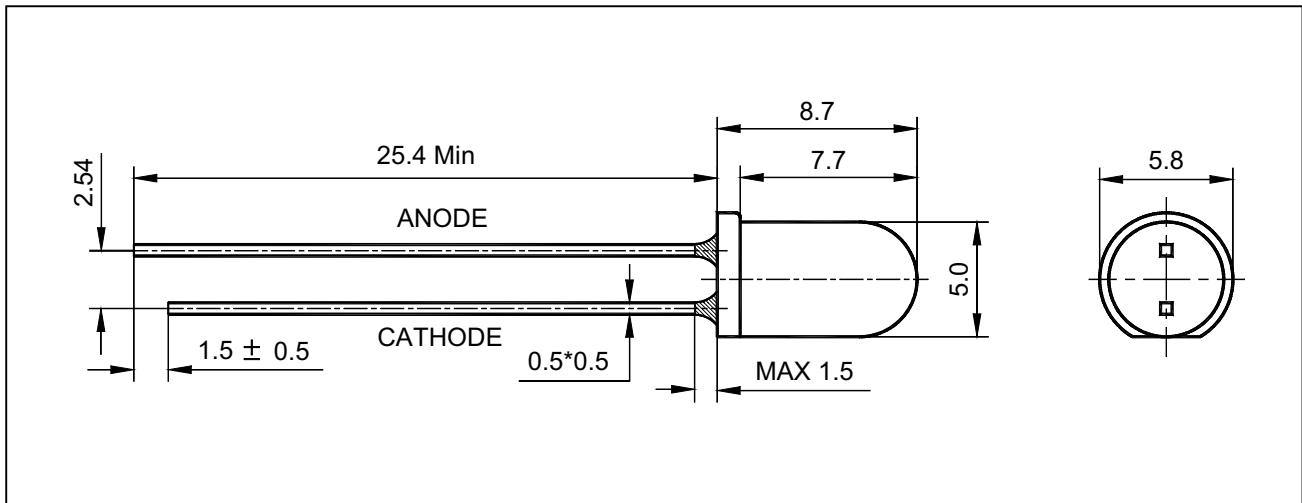

- Notes:**
1. All dimensions are in millimeters
  2. Tolerance is  $\pm 0.20$ mm unless otherwise noted.
  3. Protruded resin under flange is 1.5mm max.
  4. Lead spacing is measured where the leads emerge from the package.
  5. Specifications are subject to change without notice.

## Absolute Maximum Rating at Ta=25°C

www.DataSheet4U.com

Parameter	Value	Units
Power Dissipation	150	mW
Peak Forward Current(1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Forward Current	50	mA
Reverse Voltage	25	V
Operating Temperature Range	-40°C to + 80°C	
Storage Temperature Range	-55°C to + 100°C	
Lead Soldering Temperature(3mm From Body)	260°C for 5 Seconds	

**Electrical Optical Characteristics at Ta=25℃**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Luminous Intensity	I <sub>v</sub>	2200	3200	----	mcd	I <sub>f</sub> =20mA
Viewing Angle	2θ <sub>1/2</sub>	----	30	----	Deg.	I <sub>f</sub> =20mA
Dominant Wavelength	λ <sub>d</sub>	----	590	----	nm	I <sub>f</sub> =20mA
Forward Voltage	V <sub>f</sub>	----	2.35	2.6	V	I <sub>f</sub> =20mA
Reverse Current	I <sub>r</sub>	----	----	100	μA	V <sub>r</sub> =10V

**Note:** 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

2. θ<sub>1/2</sub> is the off-axis angle at which the luminous intensity is half the axial luminous intensity,  $2\theta_{1/2} = \theta_{1/2} + \theta_{1/2}$ .

**Bin Ranks**

Rank	M	N	P
Luminous Intensity (I <sub>f</sub> = 20mA)	2200~2800 mcd	2800~3600 mcd	3600~4700 mcd

Rank	Y3	Y4	Y5
Wavelength Specification (I <sub>f</sub> = 20mA)	584~586nm	586~588nm	588~590nm
Rank	Y6	Y7	Y8
Wavelength Specification (I <sub>f</sub> = 20mA)	590~592nm	592~594nm	594~596nm

**Note:** The quantity ratio of the ranks is decided by GVOPTO.

Measurement Uncertainty of the Luminous intensity : ±15%

Measurement Uncertainty of the Forward Voltage : ±0.1V

Measurement Uncertainty of the Dominant Wavelength : ± 1.0nm

**Cautions on LED Usage**


1. Static electricity and surge will damage the LEDs. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.
2. Use grounded soldering iron and do not solder the LEDs at the conditions beyond the absolute maximum ratings specified in the data sheet.
3. G.V. will not be held responsible for any damage caused by the operation exceeds the absolute maximum ratings.
4. Use the LEDs as soon as possible once the bag was opened. Store and use where there is no corrosive gas. The leads of LEDs will be rusty when the LEDs were exposed to the air for longer than one month.

LY551C3E


### Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)


$I_F$  vs.  $V_F$

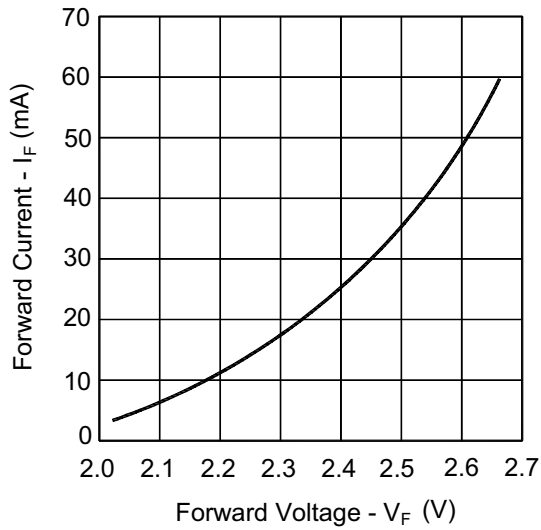


$I_V$  vs.  $I_F$

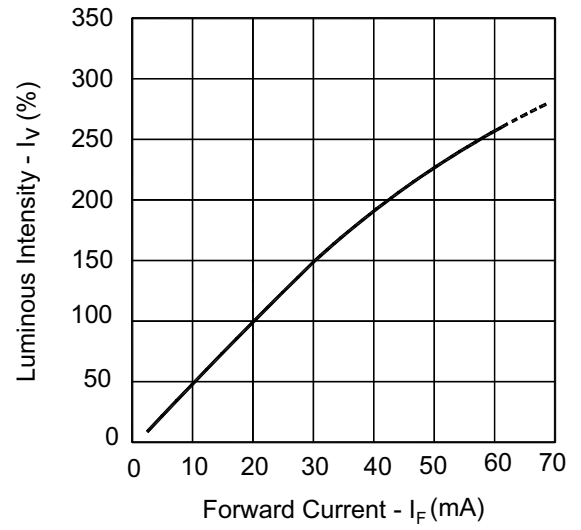


$I_R$  vs.  $V_R$

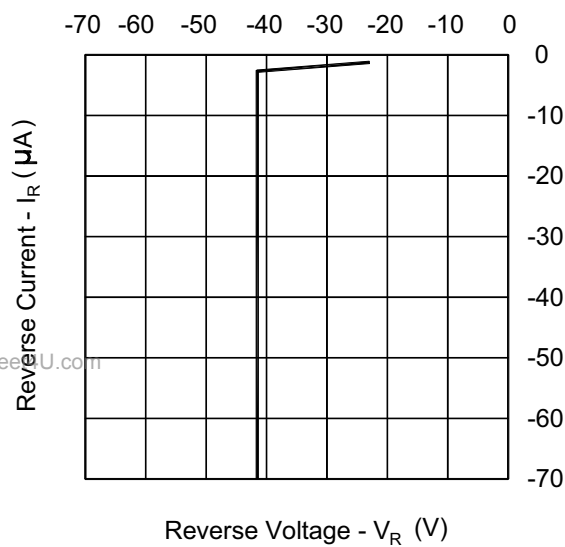


$I_F$  vs.  $T_A$

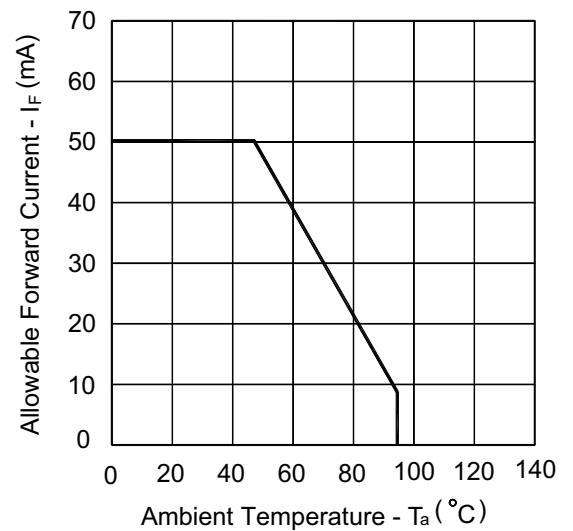

Relative Luminous Intensity vs.  $T_a$

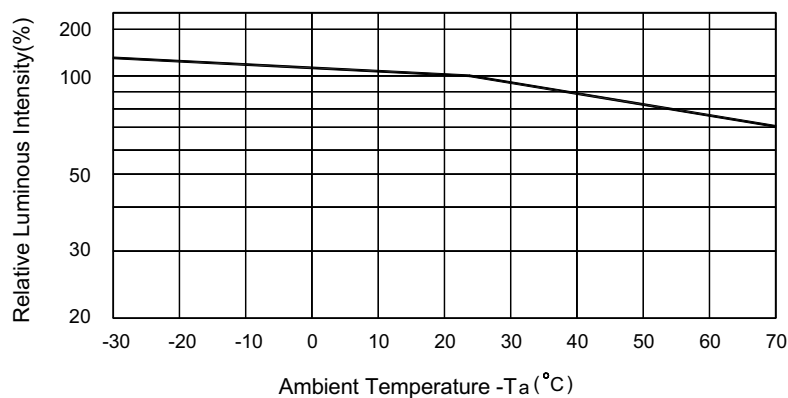

### Packing Specification

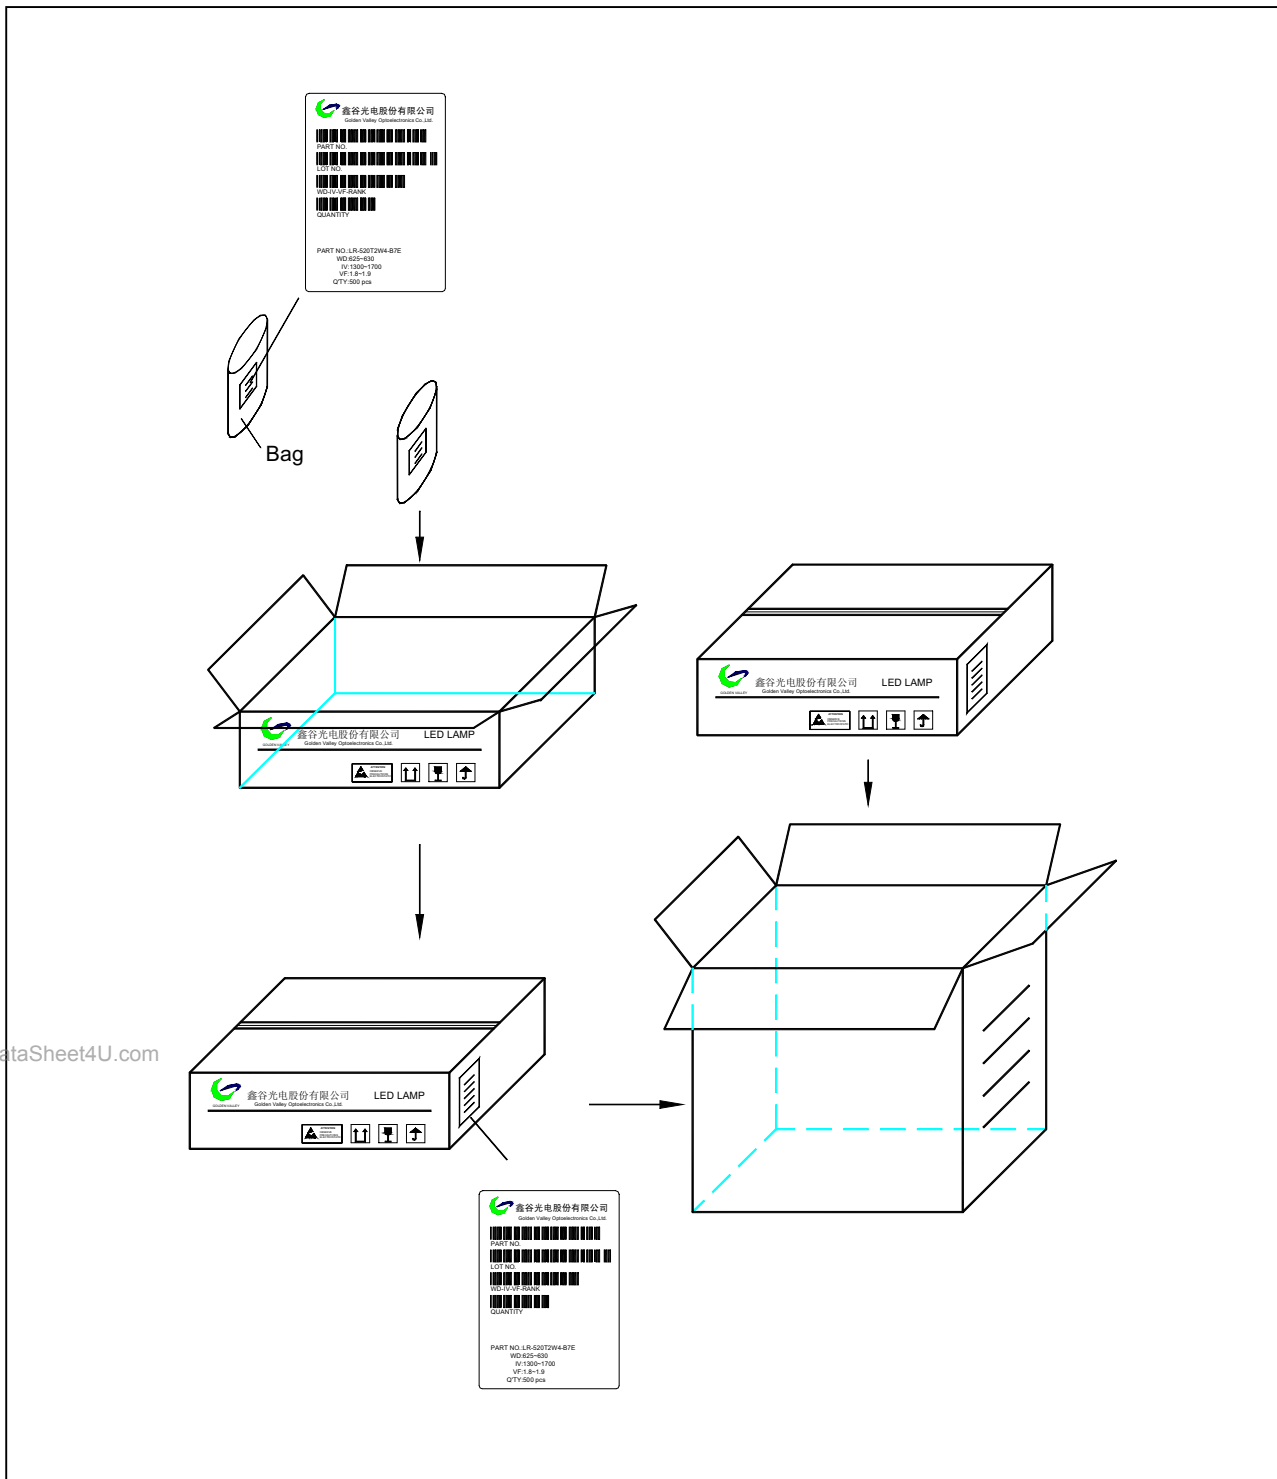

**Notes :**

1. Inner play bag is common products
2. 20 bags per inner box, 20 kpcs per inner box .
3. 3 inner box per outer box, 60 kpcs per outer box