



Lyontek Inc.

LY61L1024

Rev. 2.2

128K X 8 BIT HIGH SPEED CMOS SRAM

REVISION HISTORY

<u>Revision</u>	<u>Description</u>	<u>Issue Date</u>
Rev. 1.0	Initial Issue	Jul.25.2004
Rev. 1.1	Delete Icc1 Spec.	Sep.21.2004
Rev. 2.0	Adding -10ns Spec.	Aug.30.2005
Rev. 2.1	Revised V_{TERM} to V_{T1} and V_{T2} Revised Test Condition of I_{SB1}/I_{DR} Added LL Spec.	Feb.2.2009
Rev.2.2	Revised Test Condition of I_{CC}/I_{SB} Revised FEATURES & ORDERING INFORMATION <u>Lead free and green package available to Green package available</u> Deleted T_{SOLDER} in <u>ABSOLUTE MAXIMUM RATINGS</u> Added packing type in <u>ORDERING INFORMATION</u>	Feb.2.2009 Apr.17.2009

FEATURES

- Fast access time : 10/12/15ns
- Low power consumption:
Operating current : 75/70/65mA (TYP.)
Standby current : 0.6mA (TYP.)
1 μ A (TYP.) LL -version
- Single 3.3V power supply
- All inputs and outputs TTL compatible
- Fully static operation
- Tri-state output
- Data retention voltage : 2.0V (MIN.)
- **Green package available**
- Package : 32-pin 300 mil SOJ
32-pin 8mm x 20mm TSOP-I
32-pin 8mm x 13.4mm STSOP

GENERAL DESCRIPTION


The LY61L1024 is a 1,048,576-bit low power CMOS static random access memory organized as 131,072 words by 8 bits. It is fabricated using very high performance, high reliability CMOS technology. Its standby current is stable within the range of operating temperature.

The LY61L1024 is well designed for very high speed system applications, and particularly well suited for battery back-up nonvolatile memory application.


The LY61L1024 operates from a single power supply of 3.3V and all inputs and outputs are fully TTL compatible

PRODUCT FAMILY

Product Family	Operating Temperature	Vcc Range	Speed	Power Dissipation	
				Standby(I_{SB1} , TYP.)	Operating(I_{CC} , TYP.)
LY61L1024	0 ~ 70°C	3.15 ~ 3.6V	10ns	0.6mA	75mA
LY61L1024	0 ~ 70°C	3.0 ~ 3.6V	12/15ns	0.6mA	70/65mA
LY61L1024(E)	-20 ~ 80°C	3.15 ~ 3.6V	10ns	0.6mA	75mA
LY61L1024(E)	-20 ~ 80°C	3.0 ~ 3.6V	12/15ns	0.6mA	70/65mA
LY61L1024(LL)	0 ~ 70°C	3.15 ~ 3.6V	10ns	1 μ A	75mA
LY61L1024(LL)	0 ~ 70°C	3.0 ~ 3.6V	12/15ns	1 μ A	70/65mA
LY61L1024(LLE)	-20 ~ 80°C	3.15 ~ 3.6V	10ns	1 μ A	75mA
LY61L1024(LLE)	-20 ~ 80°C	3.0 ~ 3.6V	12/15ns	1 μ A	70/65mA

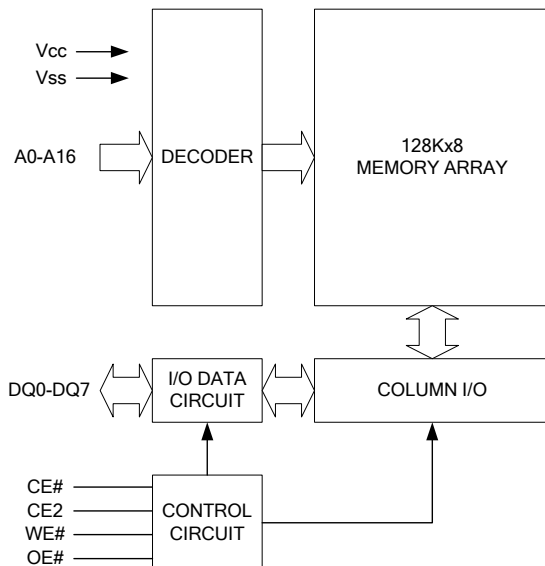FUNCTIONAL BLOCK DIAGRAM**PIN DESCRIPTION**

SYMBOL	DESCRIPTION
A0 - A16	Address Inputs
DQ0 - DQ7	Data Inputs/Outputs
CE#, CE2	Chip Enable Inputs
WE#	Write Enable Input
OE#	Output Enable Input
Vcc	Power Supply
Vss	Ground
NC	No Connection

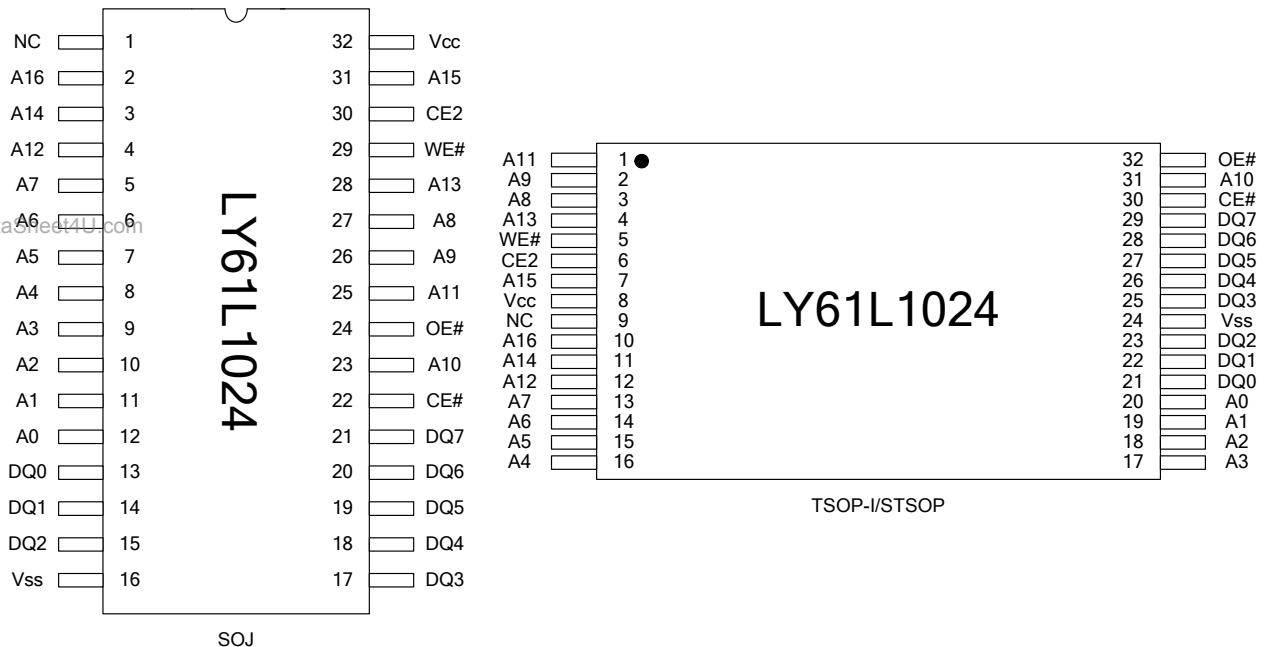PIN CONFIGURATION

ABSOLUTE MAXIMUM RATINGS*

PARAMETER	SYMBOL	RATING	UNIT
Voltage on V _{cc} relative to V _{ss}	V _{T1}	-0.5 to 4.6	V
Voltage on any other pin relative to V _{ss}	V _{T2}	-0.5 to V _{cc} +0.5	V
Operating Temperature	T _A	0 to 70(C grade)	°C
		-20 to 80(E grade)	°C
Storage Temperature	T _{STG}	-65 to 150	°C
Power Dissipation	P _D	1	W
DC Output Current	I _{OUT}	50	mA

*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.

TRUTH TABLE

MODE	CE#	CE2	OE#	WE#	I/O OPERATION	SUPPLY CURRENT
Standby	H	X	X	X	High-Z	I _{SB} , I _{SB1}
	X	L	X	X	High-Z	I _{SB} , I _{SB1}
Output Disable	L	H	H	H	High-Z	I _{CC}
Read	L	H	L	H	D _{OUT}	I _{CC}
Write	L	H	X	L	D _{IN}	I _{CC}

Note: H = V_{IH}, L = V_{IL}, X = Don't care.



LY61L1024

Rev. 2.2

128K X 8 BIT HIGH SPEED CMOS SRAM

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP. ⁴	MAX.	UNIT	
Supply Voltage	V _{CC}		3.0	3.3	3.6	V	
Input High Voltage	V _{IH} ¹		2.0	-	V _{CC} +0.5	V	
Input Low Voltage	V _{IL} ²		-0.5	-	0.6	V	
Input Leakage Current	I _{LI}	V _{CC} ≥ V _{IN} ≥ V _{SS}	-1	-	1	μA	
Output Leakage Current	I _{LO}	V _{CC} ≥ V _{OUT} ≥ V _{SS} , Output Disabled	-1	-	1	μA	
Output High Voltage	V _{OH}	I _{OH} = -4mA	2.2	-	-	V	
Output Low Voltage	V _{OL}	I _{OL} = 8mA	-	-	0.4	V	
Average Operating Power supply Current	I _{CC}	Cycle time = Min. CE# = V _{IL} and CE2 = V _{IH} , I _{I/O} = 0mA Others at V _{IL} or V _{IH}	-10	-	75	120	mA
			-12	-	70	100	mA
			-15	-	65	90	mA
Standby Power Supply Current	I _{SB}	CE# = V _{IH} or CE2 = V _{IL} Others at V _{IL} or V _{IH}	-	3	20	mA	
	I _{SB1}	CE# ≥ V _{CC} -0.2V or CE2 ≤ 0.2V	Normal	-	0.6	3	mA
		CE# ≥ V _{CC} -0.2V or CE2 ≤ 0.2V Others at 0.2V or V _{CC} -0.2V	LL	-	1	30	μA

Notes:

- V_{IH}(max) = V_{CC} + 3.0V for pulse width less than 10ns.
- V_{IL}(min) = V_{SS} - 3.0V for pulse width less than 10ns.
- Over/Undershoot specifications are characterized, not 100% tested.
- Typical values are included for reference only and are not guaranteed or tested.
Typical valued are measured at V_{CC} = V_{CC}(TYP.) and T_A = 25°C

CAPACITANCE (T_A = 25°C, f = 1.0MHz)

www.DataSheet4U.com

PARAMETER	SYMBOL	MIN.	MAX	UNIT
Input Capacitance	C _{IN}	-	6	pF
Input/Output Capacitance	C _{I/O}	-	8	pF

Note : These parameters are guaranteed by device characterization, but not production tested.

AC TEST CONDITIONS

Input Pulse Levels	0.2V to V _{CC} - 0.2V
Input Rise and Fall Times	3ns
Input and Output Timing Reference Levels	1.5V
Output Load	C _L = 30pF + 1TTL, I _{OH} /I _{OL} = -4mA/8mA

AC ELECTRICAL CHARACTERISTICS**(1) READ CYCLE**

PARAMETER	SYM.	LY61L1024-10		LY61L1024-12		LY61L1024-15		UNIT
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
Read Cycle Time	t _{RC}	10	-	12	-	15	-	ns
Address Access Time	t _{AA}	-	10	-	12	-	15	ns
Chip Enable Access Time	t _{ACE}	-	10	-	12	-	15	ns
Output Enable Access Time	t _{OE}	-	5	-	6	-	7	ns
Chip Enable to Output in Low-Z	t _{CLZ} *	2	-	3	-	4	-	ns
Output Enable to Output in Low-Z	t _{OLZ} *	0	-	0	-	0	-	ns
Chip Disable to Output in High-Z	t _{CHZ} *	-	5	-	6	-	7	ns
Output Disable to Output in High-Z	t _{OHZ} *	-	5	-	6	-	7	ns
Output Hold from Address Change	t _{OH}	3	-	3	-	3	-	ns

(2) WRITE CYCLE


PARAMETER	SYM.	LY61L1024-10		LY61L1024-12		LY61L1024-15		UNIT
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
Write Cycle Time	t _{WC}	10	-	12	-	15	-	ns
Address Valid to End of Write	t _{AW}	8	-	10	-	12	-	ns
Chip Enable to End of Write	t _{CW}	8	-	10	-	12	-	ns
Address Set-up Time	t _{AS}	0	-	0	-	0	-	ns
Write Pulse Width	t _{WP}	8	-	9	-	10	-	ns
Write Recovery Time	t _{WR}	0	-	0	-	0	-	ns
Data to Write Time Overlap	t _{DW}	6	-	7	-	8	-	ns
Data Hold from End of Write Time	t _{DH}	0	-	0	-	0	-	ns
Output Active from End of Write	t _{OW} *	2	-	3	-	4	-	ns
Write to Output in High-Z	t _{WHZ} *	-	6	-	7	-	8	ns

*These parameters are guaranteed by device characterization, but not production tested.




TIMING WAVEFORMS

READ CYCLE 1 (Address Controlled) (1,2)

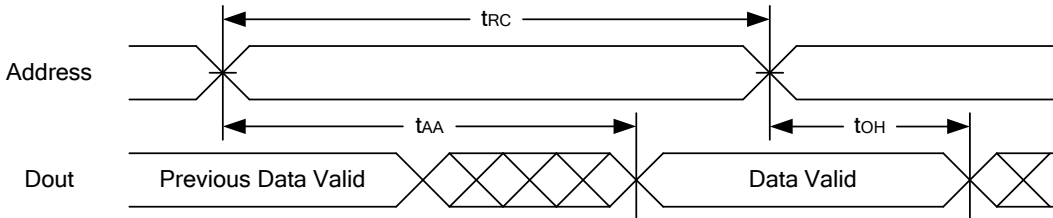

READ CYCLE 2 (CE# and CE2 and OE# Controlled) (1,3,4,5)

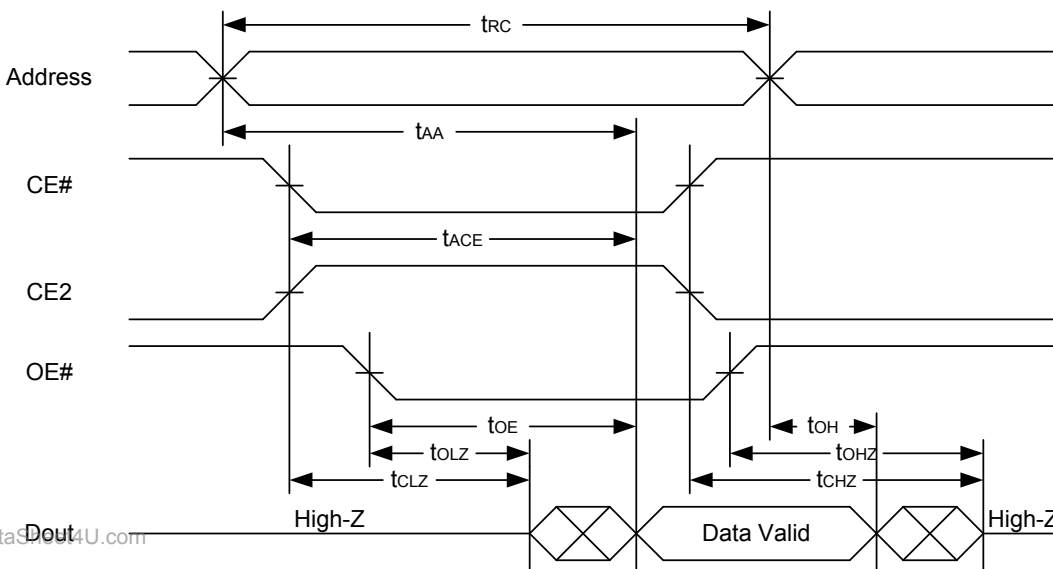

Notes :

- 1.WE# is high for read cycle.
2.Device is continuously selected OE# = low, CE# = low., CE2 = high.
3.Address must be valid prior to or coincident with CE# = low, CE2 = high; otherwise tAA is the limiting parameter.
4.tCLZ, tOLZ, tCHZ and tOHZ are specified with CL = 5pF. Transition is measured ±500mV from steady state.
5.At any given temperature and voltage condition, tCHZ is less than tCLZ , tOHZ is less than tOLZ.




LY61L1024


Rev. 2.2

128K X 8 BIT HIGH SPEED CMOS SRAM

WRITE CYCLE 1 (WE# Controlled) (1,2,3,5,6)

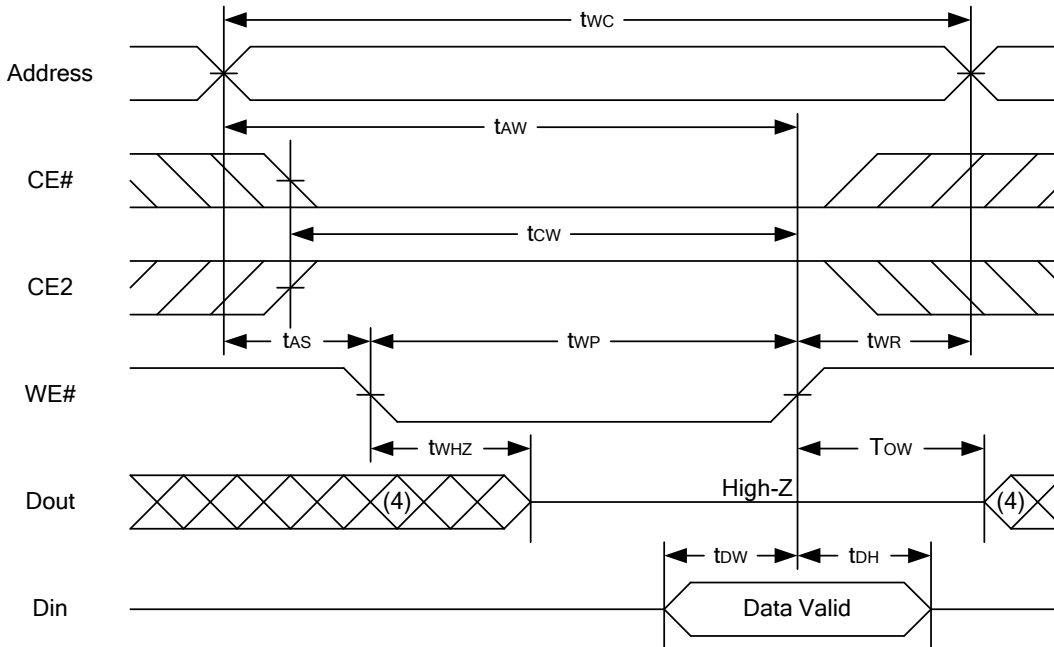

WRITE CYCLE 2 (CE# and CE2 Controlled) (1,2,5,6)

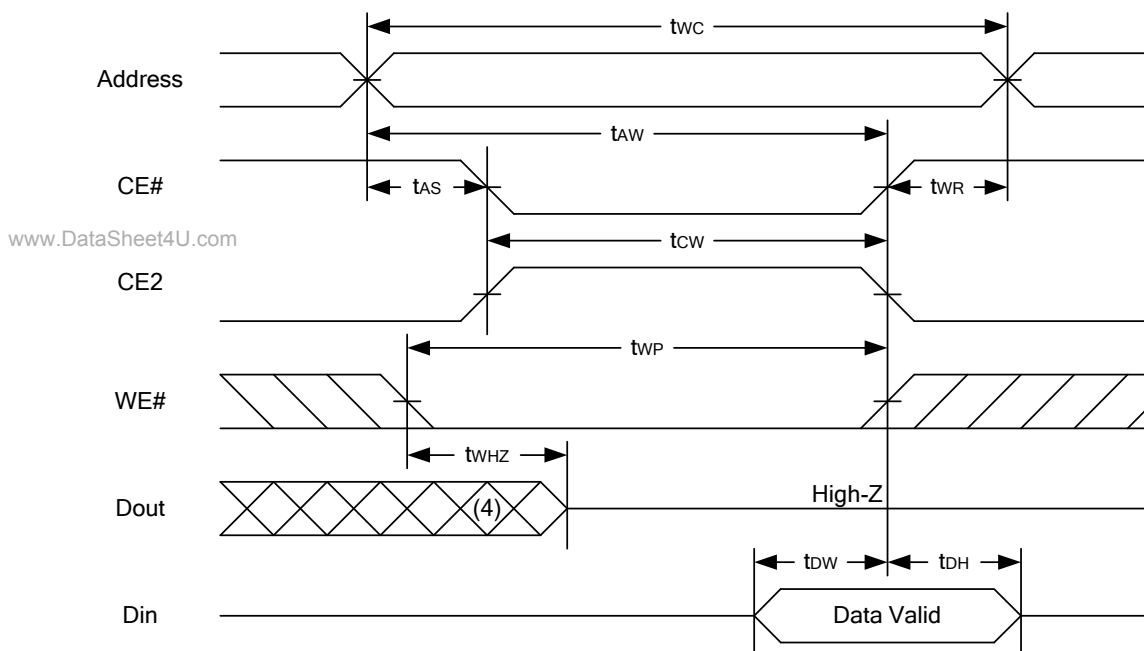

Notes :

1. WE#, CE# must be high or CE2 must be low during all address transitions.
2. A write occurs during the overlap of a low CE#, high CE2, low WE#.
3. During a WE#-controlled write cycle with OE# low, twp must be greater than twhz + tdw to allow the drivers to turn off and data to be placed on the bus.
4. During this period, I/O pins are in the output state, and input signals must not be applied.
5. If the CE# low transition and CE2 high transition occurs simultaneously with or after WE# low transition, the outputs remain in a high impedance state.
6. tow and twhz are specified with CL = 5pF. Transition is measured ±500mV from steady state.




DATA RETENTION CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Vcc for Data Retention	V _{DR}	CE# \geq V _{cc} - 0.2V or CE2 \leq 0.2V	2.0	-	3.6	V	
Data Retention Current	I _{DR}	V _{cc} = 2.0V CE# \geq V _{cc} - 0.2V or CE2 \leq 0.2V	Normal	-	0.006	2	mA
		V _{cc} = 2.0V CE# \geq V _{cc} - 0.2V or CE2 \leq 0.2V others at 0.2V or V _{cc} -0.2V	LL	-	0.5	30	μ A
Chip Disable to Data Retention Time	t _{CDR}	See Data Retention Waveforms (below)	0	-	-	ns	
Recovery Time	t _R		t _{RC*}	-	-	ns	

t_{RC*} = Read Cycle Time


DATA RETENTION WAVEFORM

Low Vcc Data Retention Waveform (1) (CE# controlled)

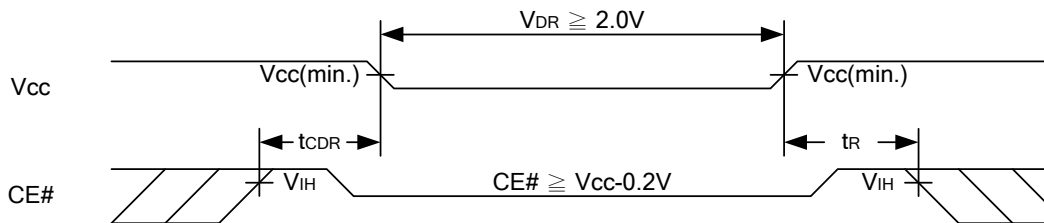

Low Vcc Data Retention Waveform (2) (CE2 controlled)


www.DataSheet4U.com

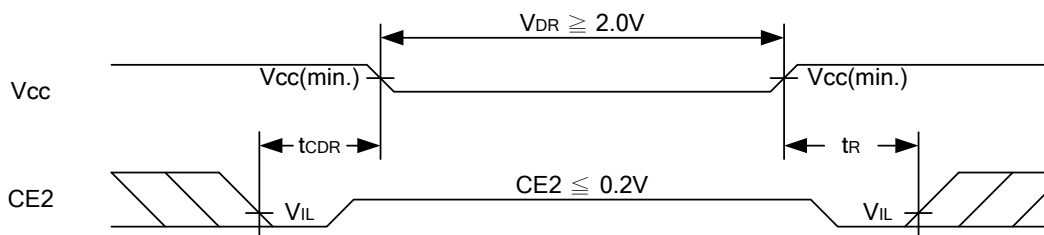



PACKAGE OUTLINE DIMENSION

32 pin 300mil SOJ Package Outline Dimension

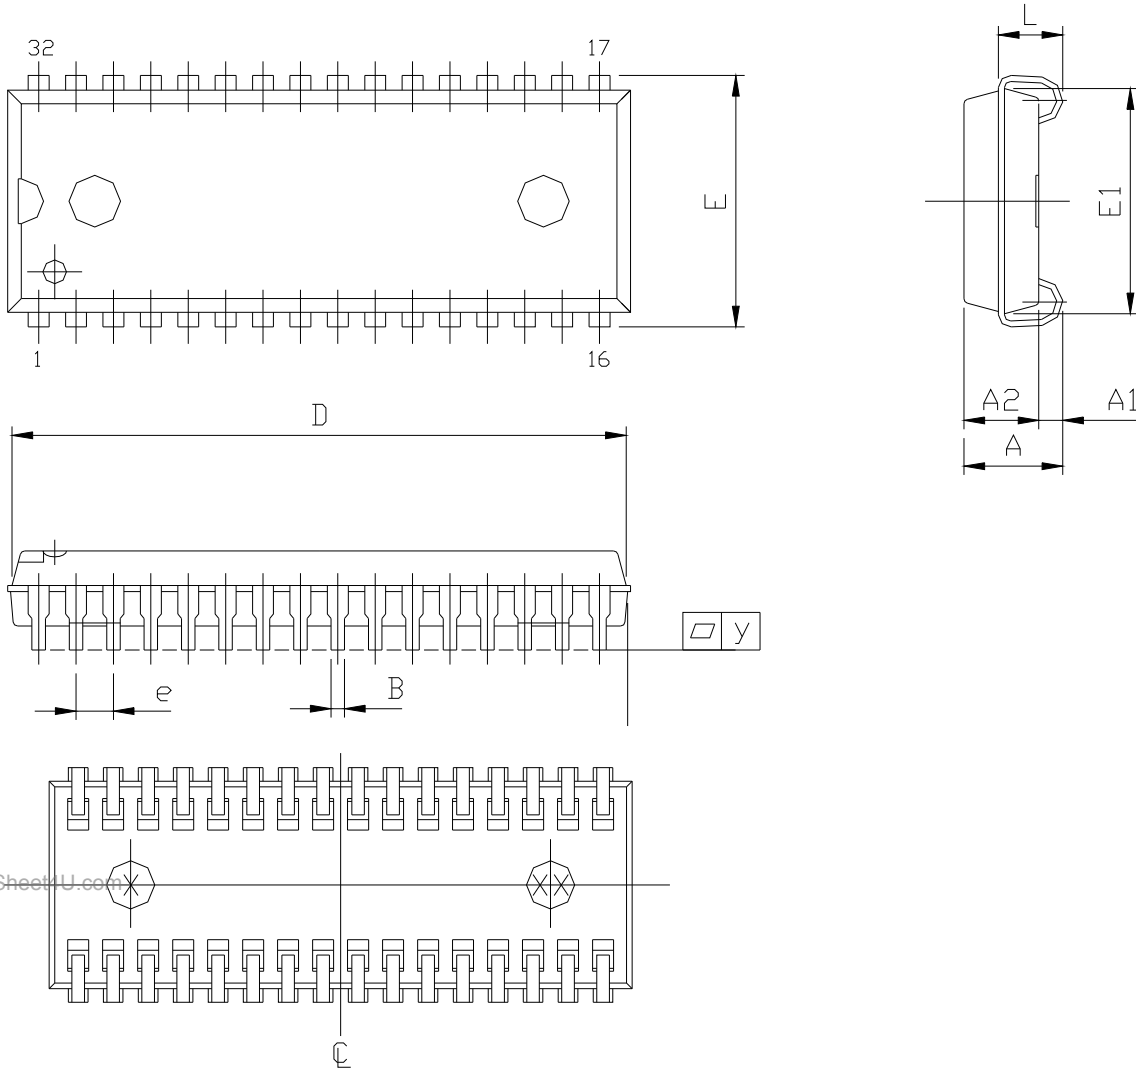

www.DataSheet4U.com


SYMBOL	UNIT	INCH(BASE)	MM(REF)
A		0.148 (MAX)	3.759 (MAX)
A1		0.026 (MIN)	0.660 (MIN)
A2		0.100 ±0.005	2.540 ±0.127
B		0.018 (TYP)	0.457 (TYP)
D		0.830 (MAX)	21.082 (MAX)
E		0.335 (TYP)	8.509 (TYP)
E1		0.300 ±0.005	7.620 ±0.127
e		0.050 (TYP)	1.270 (TYP)
L		0.086 ±0.010	2.184 ±0.254
y		0.003 (MAX)	0.076 (MAX)

LY61L1024

Rev. 2.2

128K X 8 BIT HIGH SPEED CMOS SRAM

32 pin 8mm x 20mm TSOP-I Package Outline Dimension

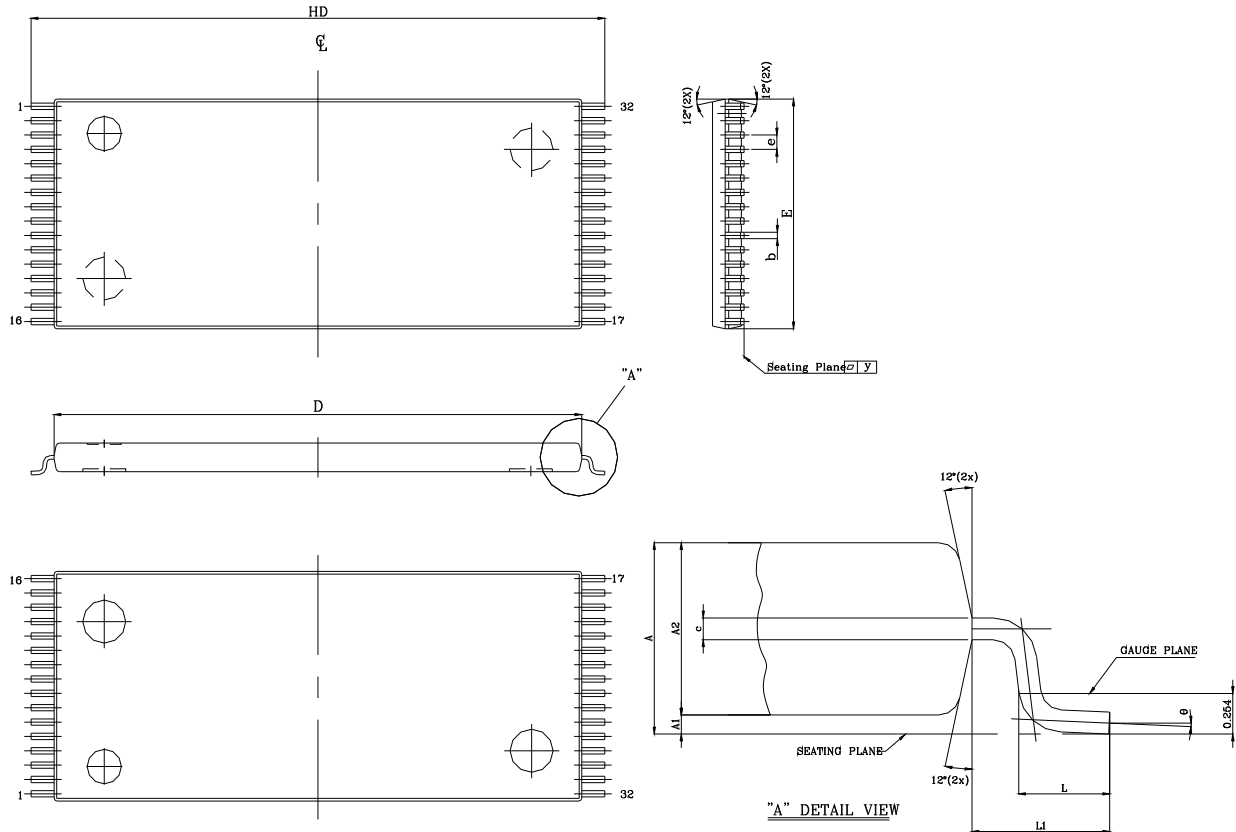

SYM.	UNIT	INCH(BASE)	MM(REF)
A		0.047 (MAX)	1.20 (MAX)
A1		0.004 ±0.002	0.10 ±0.05
A2		0.039 ±0.002	1.00 ±0.05
b		0.008 + 0.002 - 0.001	0.20 + 0.05 - 0.03
c		0.005 (TYP)	0.127 (TYP)
D		0.724 ±0.004	18.40 ±0.10
E		0.315 ±0.004	8.00 ±0.10
e		0.020 (TYP)	0.50 (TYP)
HD		0.787 ±0.008	20.00 ±0.20
L		0.0197 ±0.004	0.50 ±0.10
L1		0.0315 ±0.004	0.08 ±0.10
y		0.003 (MAX)	0.076 (MAX)
θ		0° ~ 5°	0° ~ 5°


www.DataSheet4U.com

LY61L1024

Rev. 2.2

128K X 8 BIT HIGH SPEED CMOS SRAM

32 pin 8mm x 13.4mm STSOP Package Outline Dimension

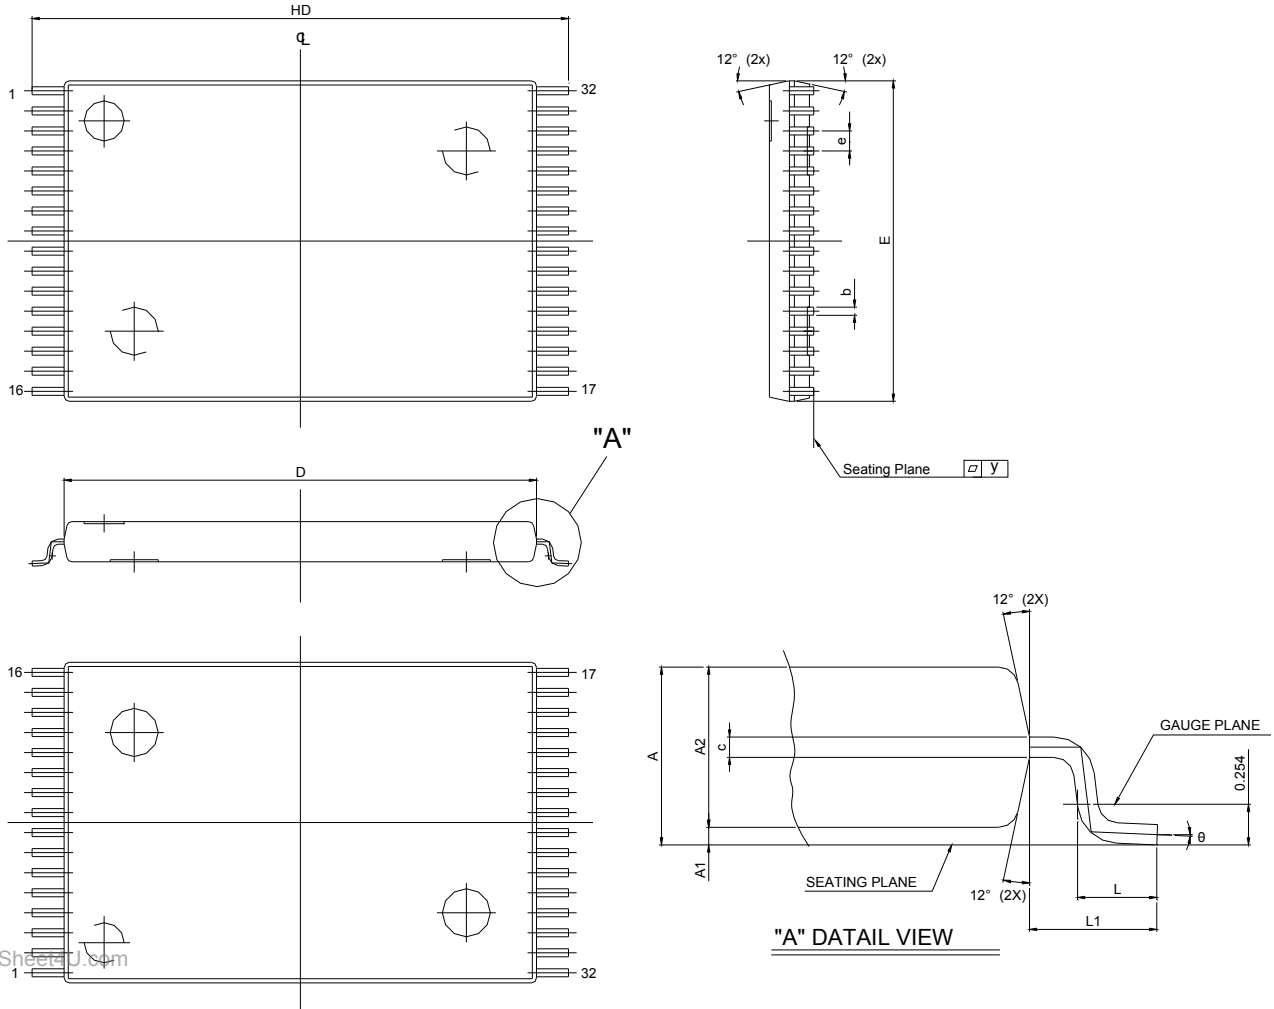

www.DataSheet4U.com

SYM.	UNIT	INCH(BASE)	MM(REF)
A		0.049 (MAX)	1.25 (MAX)
A1		0.005 ±0.002	0.130 ±0.05
A2		0.039 ±0.002	1.00 ±0.05
b		0.008 ±0.01	0.20±0.025
c		0.005 (TYP)	0.127 (TYP)
D		0.465 ±0.004	11.80 ±0.10
E		0.315 ±0.004	8.00 ±0.10
e		0.020 (TYP)	0.50 (TYP)
HD		0.528±0.008	13.40 ±0.20.
L		0.0197 ±0.004	0.50 ±0.10
L1		0.0315 ±0.004	0.8 ±0.10
y		0.003 (MAX)	0.076 (MAX)
Θ		0°~5°	0°~5°

ORDERING INFORMATIONLY61L1024 U V - WW XX Y Z**Z** : Packing Type

Blank : Tube or Tray

T : Tape Reel

Y : Temperature Range

Blank : (Commercial) 0°C ~ 70°C

E : (Extended) -20°C ~ +80°C

I : (Industrial) -40°C ~ +85°C

XX : Power Type

LL : Ultra Low Power

WW : Access Time(Speed)**V** : Lead Information

L : Green Package

U : Package Type

J : 32-pin 300 mil SOJ

L : 32-pin 8 mm x 20 mm TSOP-I

R : 32-pin 8 mm x 13.4 mm STSOP



LY61L1024

Rev. 2.2

128K X 8 BIT HIGH SPEED CMOS SRAM

THIS PAGE IS LEFT BLANK INTENTIONALLY.