



#### REVISION HISTORY

| <u>Revision</u> | <u>Description</u>                                                                                                                                                                                                                                              | <u>Issue Date</u> |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| Rev. 1.0        | Initial Issue                                                                                                                                                                                                                                                   | Oct.30.2007       |
| Rev. 1.1        | Revised typos in page 1,4,5(35ns to 45ns)                                                                                                                                                                                                                       | Nov.2.2007        |
| Rev. 1.2        | Added $I_{SB1} / I_{DR}$ values when $T_A = 25^{\circ}C$ and $T_A = 40^{\circ}C$<br>Revised $I_{SB1 (MAX)}$ of SL grade<br>Revised <b>FEATURES &amp; ORDERING INFORMATION</b><br><b><u>Lead free and green package available to Green package available</u></b> | Mar.30.2009       |
| Rev. 1.3        | Added packing type in <b><u>ORDERING INFORMATION</u></b><br>Revised $I_{SB1} / I_{DR(MAX)}$ when $T_A = 25^{\circ}C$ and $T_A = 40^{\circ}C$<br>Deleted $T_{SOLDER}$ in <b><u>ABSOLUTE MAXIMUM RATINGS</u></b>                                                  | Apr.13.2009       |
| Rev. 1.4        | Revised $V_{DR}$                                                                                                                                                                                                                                                | Sep.11.2009       |



## LY626416

Rev. 1.4

64K X 16 BIT LOW POWER CMOS SRAM

### FEATURES

- Fast access time : 45/55/70ns
- Low power consumption:  
Operating current : 50/40/30mA (TYP.)  
Standby current : 3μA@5V(TYP.) LL/SL version  
2μA@3V(TYP.) SL version
- Single 4.5V ~ 5.5V power supply
- All inputs and outputs TTL compatible
- Fully static operation
- Tri-state output
- Data byte control : LB# (DQ0 ~ DQ7)  
UB# (DQ8 ~ DQ15)
- Data retention voltage : 1.5V (MIN.)
- **Green package available**
- Package : 44-pin 400 mil TSOP-II  
48-ball 6mm x 8mm TFBGA

### GENERAL DESCRIPTION

The LY626416 is a 1,048,576-bit low power CMOS static random access memory organized as 65,536 words by 16 bits. It is fabricated using very high performance, high reliability CMOS technology. Its standby current is stable within the range of operating temperature.


The LY626416 is well designed for low power application, and particularly well suited for battery back-up nonvolatile memory application.

The LY626416 operates from a single power supply of 4.5V ~ 5.5V and all inputs and outputs are fully TTL compatible

### PRODUCT FAMILY

| Product Family | Operating Temperature | Vcc Range  | Speed      | Power Dissipation          |        |                             |
|----------------|-----------------------|------------|------------|----------------------------|--------|-----------------------------|
|                |                       |            |            | Standby( $I_{SB1}$ , TYP.) |        | Operating( $I_{CC}$ , TYP.) |
| LY626416(LL)   | 0 ~ 70°C              | 4.5 ~ 5.5V | 45/55/70ns | -                          | 3μA@5V | 50/40/30mA                  |
| LY626416(LLE)  | -20 ~ 80°C            | 4.5 ~ 5.5V | 45/55/70ns | -                          | 3μA@5V | 50/40/30mA                  |
| LY626416(LLI)  | -40 ~ 85°C            | 4.5 ~ 5.5V | 45/55/70ns | -                          | 3μA@5V | 50/40/30mA                  |
| LY626416(SL)   | 0 ~ 70°C              | 4.5 ~ 5.5V | 45/55/70ns | 2μA@3V                     | 3μA@5V | 50/40/30mA                  |
| LY626416(SLE)  | -20 ~ 80°C            | 4.5 ~ 5.5V | 45/55/70ns | 2μA@3V                     | 3μA@5V | 50/40/30mA                  |
| LY626416(SLI)  | -40 ~ 85°C            | 4.5 ~ 5.5V | 45/55/70ns | 2μA@3V                     | 3μA@5V | 50/40/30mA                  |

## FUNCTIONAL BLOCK DIAGRAM

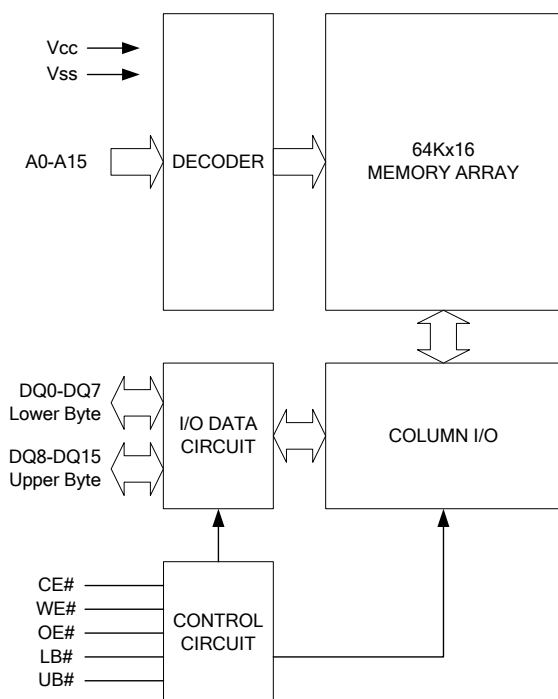

## PIN DESCRIPTION



| SYMBOL     | DESCRIPTION         |
|------------|---------------------|
| A0 - A15   | Address Inputs      |
| DQ0 – DQ15 | Data Inputs/Outputs |
| CE#        | Chip Enable Input   |
| WE#        | Write Enable Input  |
| OE#        | Output Enable Input |
| LB#        | Lower Byte Control  |
| UB#        | Upper Byte Control  |
| Vcc        | Power Supply        |
| Vss        | Ground              |

# LY626416

Rev. 1.4

64K X 16 BIT LOW POWER CMOS SRAM

## PIN CONFIGURATION

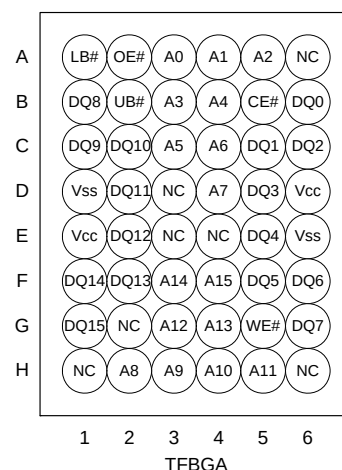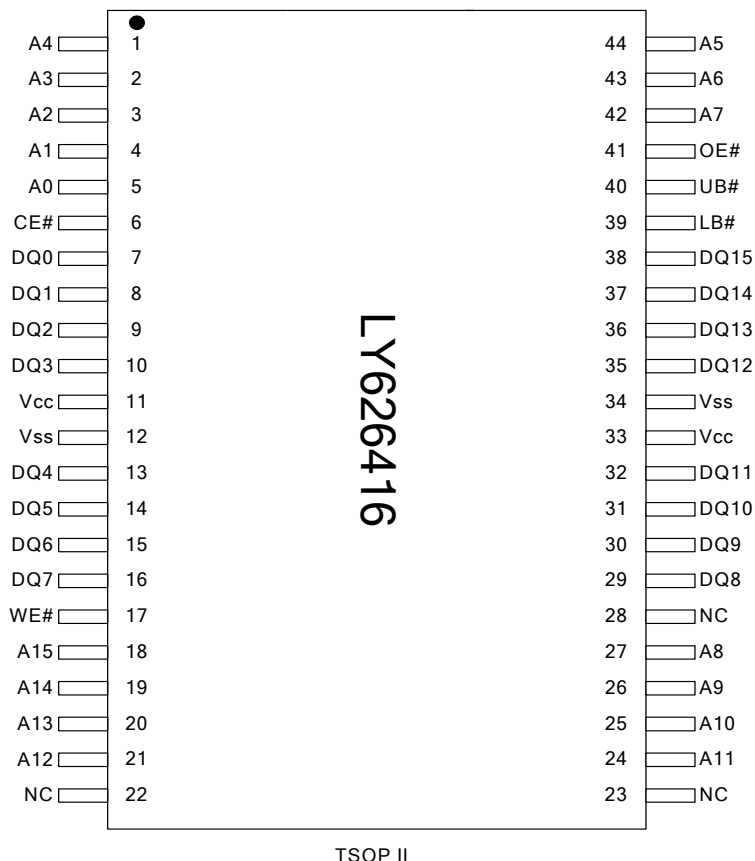

## ABSOLUTE MAXIMUM RATINGS\*

| PARAMETER                                | SYMBOL    | RATING             | UNIT |
|------------------------------------------|-----------|--------------------|------|
| Voltage on Vcc relative to Vss           | $V_{T1}$  | -0.5 to 6.5        | V    |
| Voltage on any other pin relative to Vss | $V_{T2}$  | -0.5 to Vcc+0.5    | V    |
| Operating Temperature                    | $T_A$     | 0 to 70(C grade)   | °C   |
|                                          |           | -20 to 80(E grade) |      |
|                                          |           | -40 to 85(I grade) |      |
| Storage Temperature                      | $T_{STG}$ | -65 to 150         | °C   |
| Power Dissipation                        | $P_D$     | 1                  | W    |
| DC Output Current                        | $I_{OUT}$ | 50                 | mA   |

\*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.



## LY626416

Rev. 1.4

64K X 16 BIT LOW POWER CMOS SRAM

### TRUTH TABLE

| MODE           | CE# | OE# | WE# | LB# | UB# | I/O OPERATION    |                  | SUPPLY CURRENT                     |
|----------------|-----|-----|-----|-----|-----|------------------|------------------|------------------------------------|
|                |     |     |     |     |     | DQ0-DQ7          | DQ8-DQ15         |                                    |
| Standby        | H   | X   | X   | X   | X   | High – Z         | High – Z         | I <sub>SB1</sub>                   |
|                | X   | X   | X   | H   | H   | High – Z         | High – Z         |                                    |
| Output Disable | L   | H   | H   | L   | X   | High – Z         | High – Z         | I <sub>CC</sub> , I <sub>CC1</sub> |
|                | L   | H   | H   | X   | L   | High – Z         | High – Z         |                                    |
| Read           | L   | L   | H   | L   | H   | D <sub>OUT</sub> | High – Z         | I <sub>CC</sub> , I <sub>CC1</sub> |
|                | L   | L   | H   | H   | L   | High – Z         | D <sub>OUT</sub> |                                    |
|                | L   | L   | H   | L   | L   | D <sub>OUT</sub> | D <sub>OUT</sub> |                                    |
| Write          | L   | X   | L   | L   | H   | D <sub>IN</sub>  | High – Z         | I <sub>CC</sub> , I <sub>CC1</sub> |
|                | L   | X   | L   | H   | L   | High – Z         | D <sub>IN</sub>  |                                    |
|                | L   | X   | L   | L   | L   | D <sub>IN</sub>  | D <sub>IN</sub>  |                                    |

Note: H = V<sub>IH</sub>, L = V<sub>IL</sub>, X = Don't care.

### DC ELECTRICAL CHARACTERISTICS

| PARAMETER                                                  | SYMBOL                        | TEST CONDITION                                                                                                          |                                                                          | MIN.       | TYP. <sup>*4</sup> | MAX.                 | UNIT |    |
|------------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------|--------------------|----------------------|------|----|
| Supply Voltage                                             | V <sub>CC</sub>               |                                                                                                                         |                                                                          | 4.5        | 5.0                | 5.5                  | V    |    |
| Input High Voltage                                         | V <sub>IH</sub> <sup>*1</sup> |                                                                                                                         |                                                                          | 2.4        | -                  | V <sub>CC</sub> +0.3 | V    |    |
| Input Low Voltage                                          | V <sub>IL</sub> <sup>*2</sup> |                                                                                                                         |                                                                          | - 0.2      | -                  | 0.6                  | V    |    |
| Input Leakage Current                                      | I <sub>LI</sub>               | V <sub>CC</sub> ≥ V <sub>IN</sub> ≥ V <sub>SS</sub>                                                                     |                                                                          | - 1        | -                  | 1                    | μA   |    |
| Output Leakage Current                                     | I <sub>LO</sub>               | V <sub>CC</sub> ≥ V <sub>OUT</sub> ≥ V <sub>SS</sub> ,<br>Output Disabled                                               |                                                                          | - 1        | -                  | 1                    | μA   |    |
| Output High Voltage                                        | V <sub>OH</sub>               | I <sub>OH</sub> = -1mA                                                                                                  |                                                                          | 2.4        | -                  | -                    | V    |    |
| Output Low Voltage                                         | V <sub>OL</sub>               | I <sub>OL</sub> = 2mA                                                                                                   |                                                                          | -          | -                  | 0.4                  | V    |    |
| Average Operating Power supply Current                     | I <sub>CC</sub>               | Cycle time = Min.<br>CE# = V <sub>IL</sub> , I <sub>I/O</sub> = 0mA<br>Other pins at V <sub>IL</sub> or V <sub>IH</sub> | - 45                                                                     | -          | 50                 | 80                   | mA   |    |
|                                                            |                               |                                                                                                                         | - 55                                                                     | -          | 40                 | 60                   | mA   |    |
|                                                            |                               |                                                                                                                         | - 70                                                                     | -          | 30                 | 50                   | mA   |    |
|                                                            | I <sub>CC1</sub>              | Cycle time = 1μs<br>CE# = 0.2V , I <sub>I/O</sub> = 0mA<br>Other pins at 0.2V or V <sub>CC</sub> - 0.2V                 |                                                                          | -          | 4                  | 10                   | mA   |    |
|                                                            | Standby Power Supply Current  | I <sub>SB1</sub>                                                                                                        | CE# ≥ V <sub>CC</sub> - 0.2V<br>Others at 0.2V or V <sub>CC</sub> - 0.2V | LL/LLE/LLI |                    | -                    | 3    | 50 |
| SL <sup>*5</sup><br>SLE <sup>*5</sup><br>SLI <sup>*5</sup> |                               |                                                                                                                         |                                                                          | 25°C       | -                  | 2                    | 5    | μA |
|                                                            |                               |                                                                                                                         |                                                                          |            | -                  | 2                    | 5    | μA |
| SL                                                         |                               |                                                                                                                         |                                                                          | -          | 3                  | 20                   | μA   |    |
| SLE/SLI                                                    |                               |                                                                                                                         |                                                                          | -          | 3                  | 25                   | μA   |    |

Notes:

- V<sub>IH</sub>(max) = V<sub>CC</sub> + 3.0V for pulse width less than 10ns.
- V<sub>IL</sub>(min) = V<sub>SS</sub> - 3.0V for pulse width less than 10ns.
- Over/Undershoot specifications are characterized, not 100% tested.
- Typical values are included for reference only and are not guaranteed or tested.  
Typical values are measured at V<sub>CC</sub> = V<sub>CC</sub>(TYP.) and T<sub>A</sub> = 25°C
- This parameter is measured at V<sub>CC</sub> = 3.0V

**Lyontek Inc.** reserves the rights to change the specifications and products without notice.

5F, No. 2, Industry E. Rd. IX, Science-Based Industrial Park, Hsinchu 300, Taiwan.

TEL: 886-3-6668838

FAX: 886-3-6668836



# Lyontek Inc.

## LY626416

Rev. 1.4

64K X 16 BIT LOW POWER CMOS SRAM

### CAPACITANCE ( $T_A = 25^\circ\text{C}$ , $f = 1.0\text{MHz}$ )

| PARAMETER                | SYMBOL    | MIN. | MAX | UNIT |
|--------------------------|-----------|------|-----|------|
| Input Capacitance        | $C_{IN}$  | -    | 6   | pF   |
| Input/Output Capacitance | $C_{I/O}$ | -    | 8   | pF   |

Note : These parameters are guaranteed by device characterization, but not production tested.

### AC TEST CONDITIONS

|                                          |                                                                              |
|------------------------------------------|------------------------------------------------------------------------------|
| Input Pulse Levels                       | 0.2V to $V_{CC} - 0.2V$                                                      |
| Input Rise and Fall Times                | 3ns                                                                          |
| Input and Output Timing Reference Levels | 1.5V                                                                         |
| Output Load                              | $C_L = 30\text{pF} + 1\text{TTL}$ , $I_{OH}/I_{OL} = -2\text{mA}/4\text{mA}$ |

### AC ELECTRICAL CHARACTERISTICS

#### (1) READ CYCLE

| PARAMETER                          | SYM.        | LY626416-45 |      | LY626416-55 |      | LY626416-70 |      | UNIT |
|------------------------------------|-------------|-------------|------|-------------|------|-------------|------|------|
|                                    |             | MIN.        | MAX. | MIN.        | MAX. | MIN.        | MAX. |      |
| Read Cycle Time                    | $t_{RC}$    | 45          | -    | 55          | -    | 70          | -    | ns   |
| Address Access Time                | $t_{AA}$    | -           | 45   | -           | 55   | -           | 70   | ns   |
| Chip Enable Access Time            | $t_{ACE}$   | -           | 45   | -           | 55   | -           | 70   | ns   |
| Output Enable Access Time          | $t_{OE}$    | -           | 25   | -           | 30   | -           | 35   | ns   |
| Chip Enable to Output in Low-Z     | $t_{CLZ}^*$ | 10          | -    | 10          | -    | 10          | -    | ns   |
| Output Enable to Output in Low-Z   | $t_{OLZ}^*$ | 5           | -    | 5           | -    | 5           | -    | ns   |
| Chip Disable to Output in High-Z   | $t_{CHZ}^*$ | -           | 15   | -           | 20   | -           | 25   | ns   |
| Output Disable to Output in High-Z | $t_{OHZ}^*$ | -           | 15   | -           | 20   | -           | 25   | ns   |
| Output Hold from Address Change    | $t_{OH}$    | 10          | -    | 10          | -    | 10          | -    | ns   |
| LB#, UB# Access Time               | $t_{BA}$    | -           | 45   | -           | 55   | -           | 70   | ns   |
| LB#, UB# to High-Z Output          | $t_{BHZ}^*$ | -           | 20   | -           | 25   | -           | 30   | ns   |
| LB#, UB# to Low-Z Output           | $t_{BLZ}^*$ | 10          | -    | 10          | -    | 10          | -    | ns   |

#### (2) WRITE CYCLE

| PARAMETER                        | SYM.        | LY626416-45 |      | LY626416-55 |      | LY626416-70 |      | UNIT |
|----------------------------------|-------------|-------------|------|-------------|------|-------------|------|------|
|                                  |             | MIN.        | MAX. | MIN.        | MAX. | MIN.        | MAX. |      |
| Write Cycle Time                 | $t_{WC}$    | 45          | -    | 55          | -    | 70          | -    | ns   |
| Address Valid to End of Write    | $t_{AW}$    | 40          | -    | 50          | -    | 60          | -    | ns   |
| Chip Enable to End of Write      | $t_{CW}$    | 40          | -    | 50          | -    | 60          | -    | ns   |
| Address Set-up Time              | $t_{AS}$    | 0           | -    | 0           | -    | 0           | -    | ns   |
| Write Pulse Width                | $t_{WP}$    | 35          | -    | 45          | -    | 55          | -    | ns   |
| Write Recovery Time              | $t_{WR}$    | 0           | -    | 0           | -    | 0           | -    | ns   |
| Data to Write Time Overlap       | $t_{DW}$    | 20          | -    | 25          | -    | 30          | -    | ns   |
| Data Hold from End of Write Time | $t_{DH}$    | 0           | -    | 0           | -    | 0           | -    | ns   |
| Output Active from End of Write  | $t_{OW}^*$  | 5           | -    | 5           | -    | 5           | -    | ns   |
| Write to Output in High-Z        | $t_{WHZ}^*$ | -           | 15   | -           | 20   | -           | 25   | ns   |
| LB#, UB# Valid to End of Write   | $t_{BW}$    | 35          | -    | 50          | -    | 60          | -    | ns   |

\*These parameters are guaranteed by device characterization, but not production tested.

**Lyontek Inc.** reserves the rights to change the specifications and products without notice.


5F, No. 2, Industry E. Rd. IX, Science-Based Industrial Park, Hsinchu 300, Taiwan.

TEL: 886-3-6668838


FAX: 886-3-6668836

#### TIMING WAVEFORMS

##### READ CYCLE 1 (Address Controlled) (1,2)

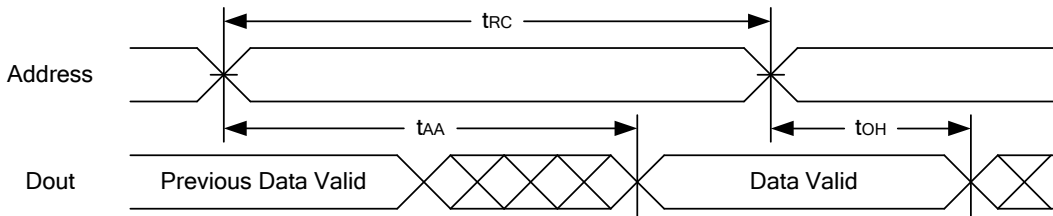

##### READ CYCLE 2 (CE# and OE# Controlled) (1,3,4,5)

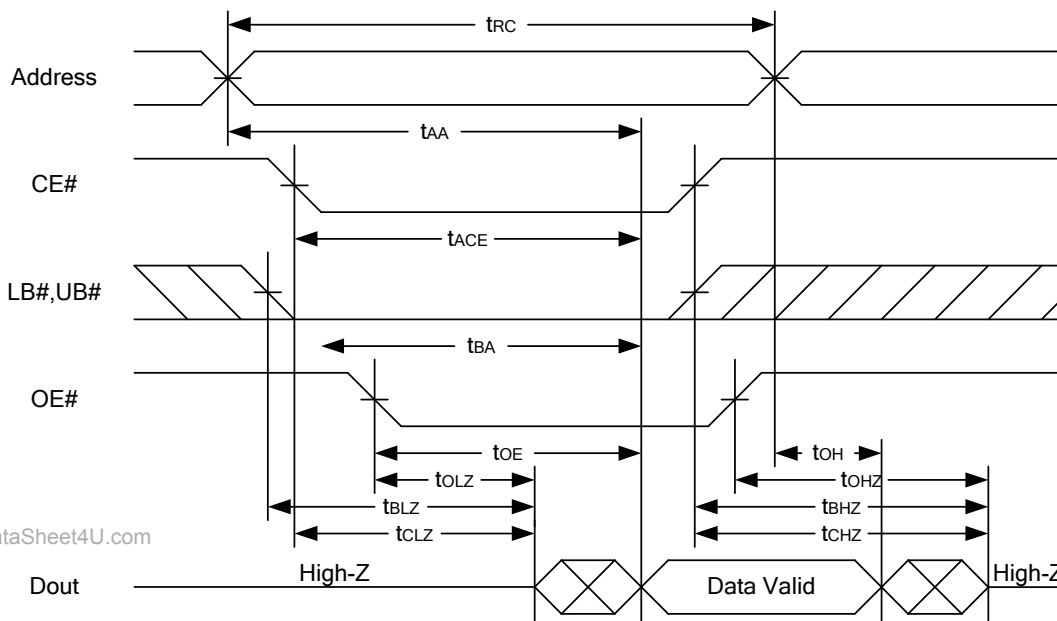

#### Notes :


1. WE# is high for read cycle.
2. Device is continuously selected OE# = low, CE# = low, LB# or UB# = low.
3. Address must be valid prior to or coincident with CE# = low, LB# or UB# = low transition; otherwise tAA is the limiting parameter.
4. tCLZ, tBLZ, tOLZ, tCHZ, tBH, tCH, tOHZ, tBHZ, and tOH are specified with CL = 5pF. Transition is measured  $\pm 500\text{mV}$  from steady state.
5. At any given temperature and voltage condition, tCHZ is less than tCLZ, tBH is less than tBLZ, tOH is less than tOLZ.

LY626416


Rev. 1.4

## 64K X 16 BIT LOW POWER CMOS SRAM

### WRITE CYCLE 1 (WE# Controlled) (1,2,3,5,6)

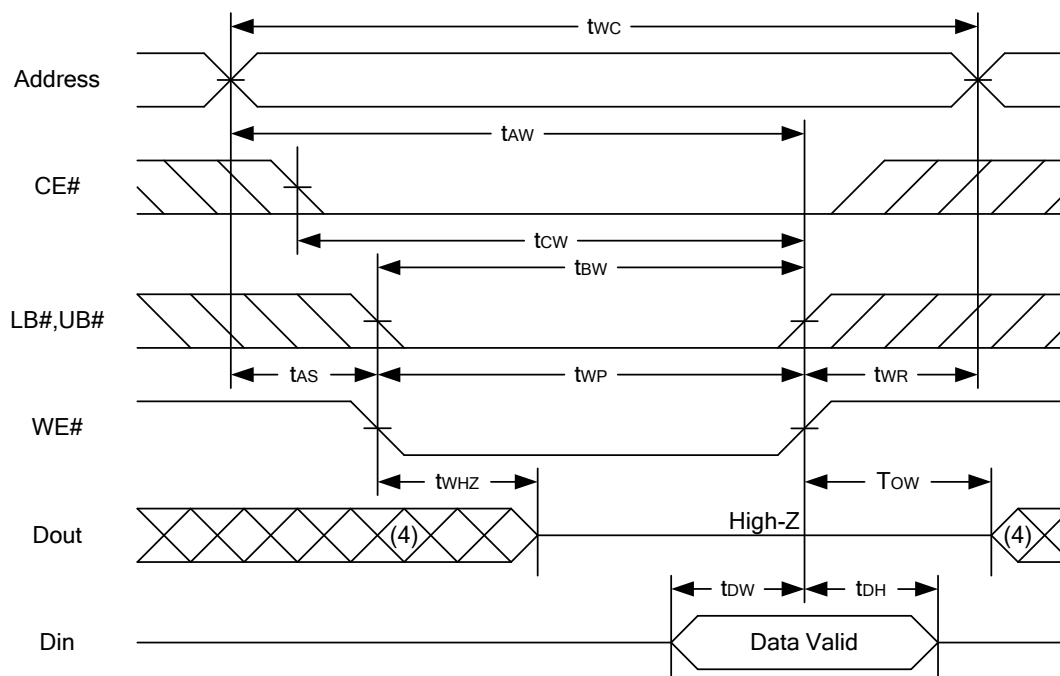


### WRITE CYCLE 2 (CE# Controlled) (1,2,5,6)

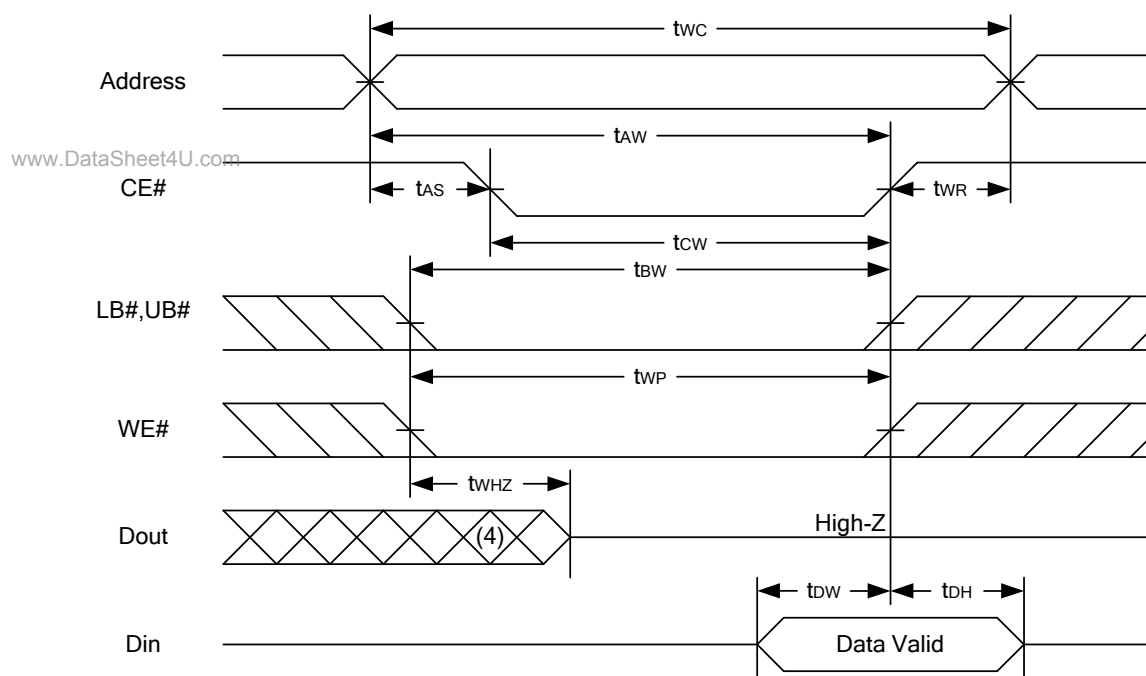





#### WRITE CYCLE 3 (LB#,UB# Controlled) (1,2,5,6)

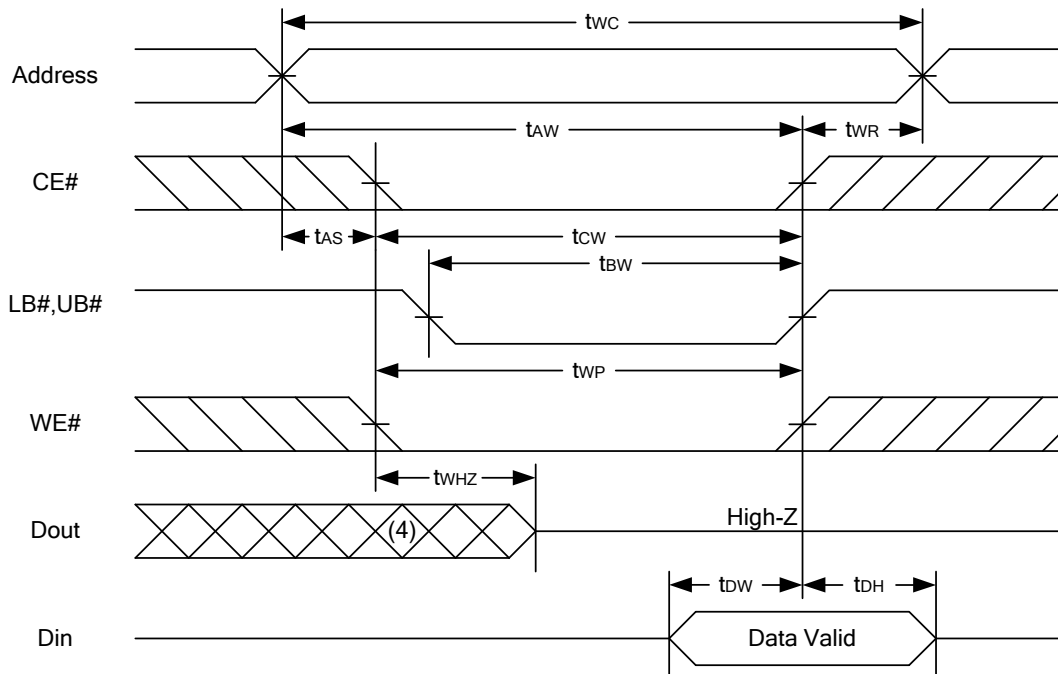

#### Notes :

1. WE#, CE#, LB#, UB# must be high during all address transitions.
2. A write occurs during the overlap of a low CE#, low WE#, LB# or UB# = low.
3. During a WE# controlled write cycle with OE# low, tWP must be greater than tWHZ + tDW to allow the drivers to turn off and data to be placed on the bus.
4. During this period, I/O pins are in the output state, and input signals must not be applied.
5. If the CE#, LB#, UB# low transition occurs simultaneously with or after WE# low transition, the outputs remain in a high impedance state.
6. tDW and tWHZ are specified with CL = 5pF. Transition is measured ±500mV from steady state.




#### DATA RETENTION CHARACTERISTICS

| PARAMETER                           | SYMBOL           | TEST CONDITION                                                                                        |    |      | MIN.              | TYP. | MAX. | UNIT |
|-------------------------------------|------------------|-------------------------------------------------------------------------------------------------------|----|------|-------------------|------|------|------|
| V <sub>CC</sub> for Data Retention  | V <sub>DR</sub>  | CE# ≥ V <sub>CC</sub> - 0.2V                                                                          |    |      | 1.5               | -    | 5.5  | V    |
| Data Retention Current              | I <sub>DR</sub>  | V <sub>CC</sub> = 1.5V<br>CE# ≥ V <sub>CC</sub> - 0.2V<br>Other pins at 0.2V or V <sub>CC</sub> -0.2V | LL |      | -                 | 1    | 20   | μA   |
|                                     |                  |                                                                                                       | SL | 25°C | -                 | 1    | 4    | μA   |
|                                     |                  |                                                                                                       |    | 40°C | -                 | 1    | 4    | μA   |
|                                     |                  |                                                                                                       | SL |      | -                 | 1    | 15   | μA   |
| Chip Disable to Data Retention Time | t <sub>CDR</sub> | See Data Retention Waveforms (below)                                                                  |    |      | 0                 | -    | -    | ns   |
| Recovery Time                       | t <sub>R</sub>   |                                                                                                       |    |      | t <sub>RC</sub> * | -    | -    | ns   |


t<sub>RC\*</sub> = Read Cycle Time

#### DATA RETENTION WAVEFORM

Low V<sub>CC</sub> Data Retention Waveform (1) (CE# controlled)

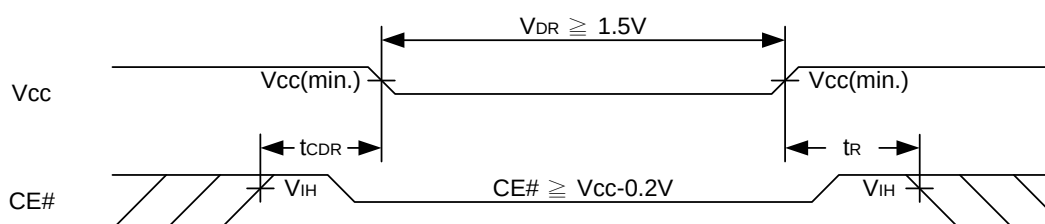





Low V<sub>CC</sub> Data Retention Waveform (2) (LB#, UB# controlled)

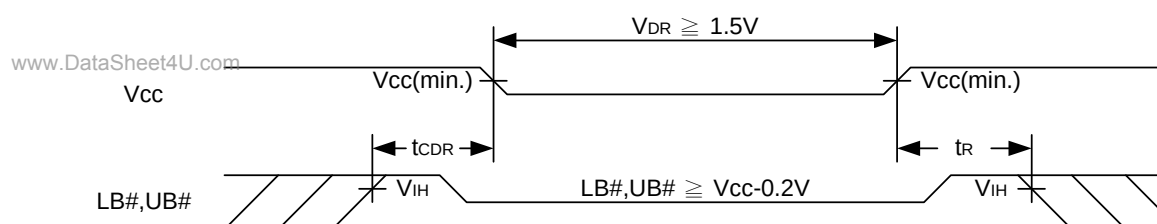



#### PACKAGE OUTLINE DIMENSION

##### 44-pin 400mil TSOP-II Package Outline Dimension

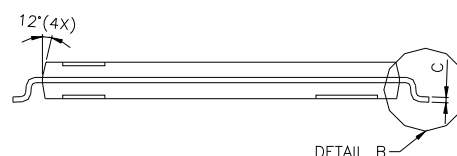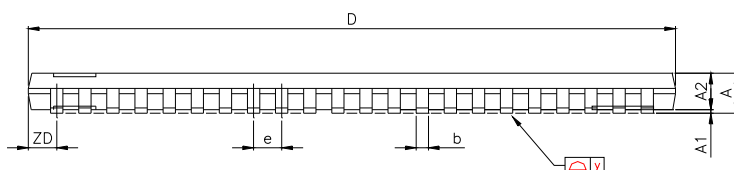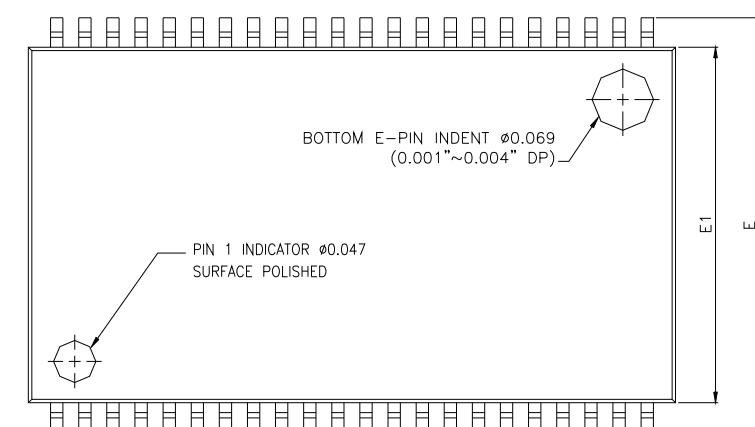




| SYMBOLS | DIMENSIONS IN MILLIMETERS |        |        | DIMENSIONS IN MILS |      |      |
|---------|---------------------------|--------|--------|--------------------|------|------|
|         | MIN.                      | NOM.   | MAX.   | MIN.               | NOM. | MAX. |
| A       | -                         | -      | 1.20   | -                  | -    | 47.2 |
| A1      | 0.05                      | 0.10   | 0.15   | 2.0                | 3.9  | 5.9  |
| A2      | 0.95                      | 1.00   | 1.05   | 37.4               | 39.4 | 41.3 |
| b       | 0.30                      | -      | 0.45   | 11.8               | -    | 17.7 |
| c       | 0.12                      | -      | 0.21   | 4.7                | -    | 8.3  |
| D       | 18.212                    | 18.415 | 18.618 | 717                | 725  | 733  |
| E       | 11.506                    | 11.760 | 12.014 | 453                | 463  | 473  |
| E1      | 9.957                     | 10.160 | 10.363 | 392                | 400  | 408  |
| e       | -                         | 0.800  | -      | -                  | 31.5 | -    |
| L       | 0.40                      | 0.50   | 0.60   | 15.7               | 19.7 | 23.6 |
| ZD      | -                         | 0.805  | -      | -                  | 31.7 | -    |
| y       | -                         | -      | 0.076  | -                  | -    | 3    |
| θ       | 0°                        | 3°     | 6°     | 0°                 | 3°   | 6°   |

## LY626416


Rev. 1.4

### 64K X 16 BIT LOW POWER CMOS SRAM

#### 48-ball 6mm × 8mm TFBGA Package Outline Dimension

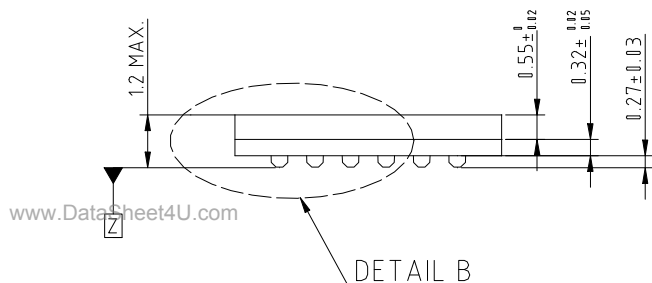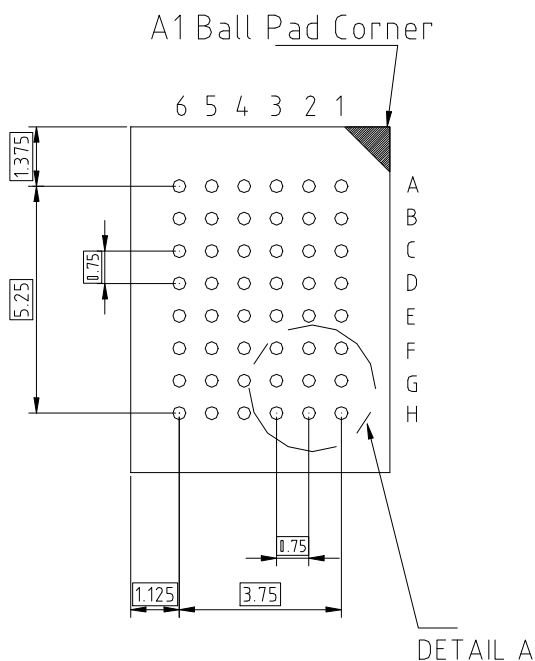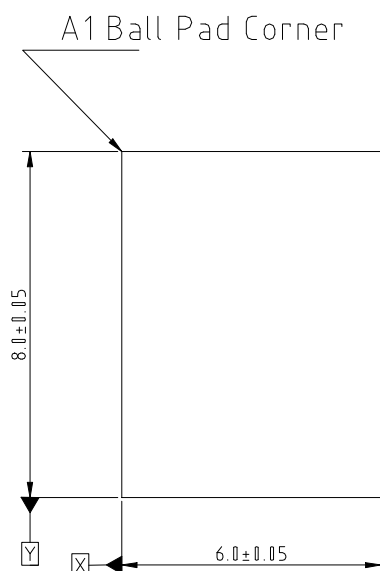


SIDE VIEW

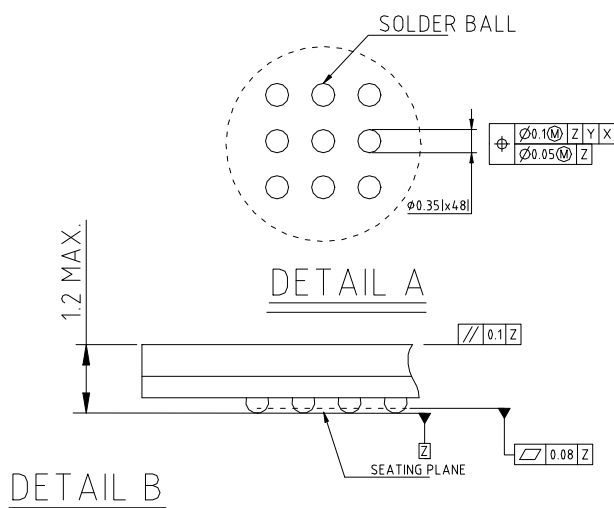

DETAIL B



#### ORDERING INFORMATION

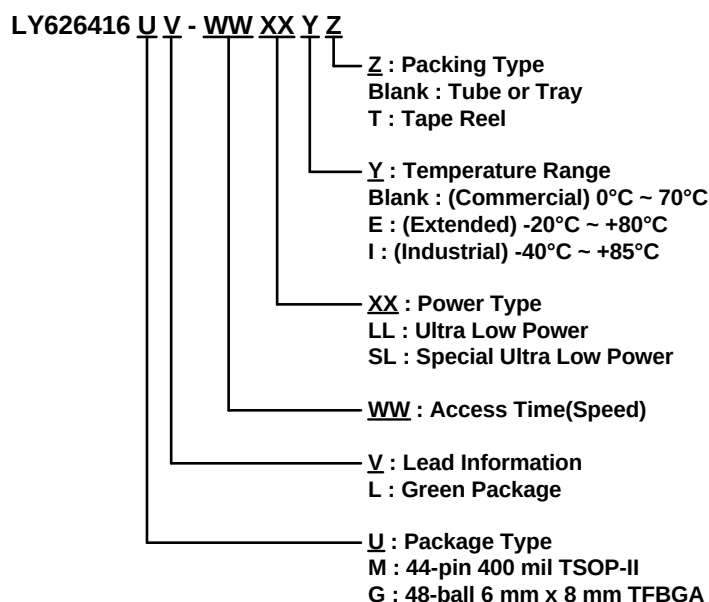



**Lyontek Inc.**

**LY626416**

Rev. 1.4

**64K X 16 BIT LOW POWER CMOS SRAM**

---

THIS PAGE IS LEFT BLANK INTENTIONALLY.