




LZH3 - DC5V - S - H

Relay Type: _____
 Coil Voltage:- 3 ~ 24VDC _____
 Type of Sealing:- S: Plastic Sealed Type _____
 Coil Power:- 0.2W _____

Features	Dimension L * W * H (mm)	15.5 * 10.5 * 11.8			
	Terminal Type	PCB			
	Weight	3.5 gm Approximately			
Contact Data	Contact Form, Resistance	1C, 100mΩ Max. @ 1A, 6VDC			
	Contact Material	Ag Alloy			
	Contact Capacity	3A @250VAC / 3A @30VDC			
Coil Data	Coil Voltage (DC)	3 ~ 24 VDC			
	Coil Power Consumption	0.2W			
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ± 10%	Pull in Voltage (VDC)	Drop Out Voltage (VDC)
		5 VDC	120	75%	10%
		12 VDC	720	75%	10%
24 VDC	2880	75%	10%		
General Data	Dielectric Strength	500VAC (Between open Contacts)			
		1000VAC (Between Coil and Contacts)			
	Insulation Resistance	100MΩ 500VDC			
	Electrical Life	1 x 10 ⁵			
	Mechanical Life	1 x 10 ⁷			
Operating Temperature	- 25 °C ~ + 70°C				

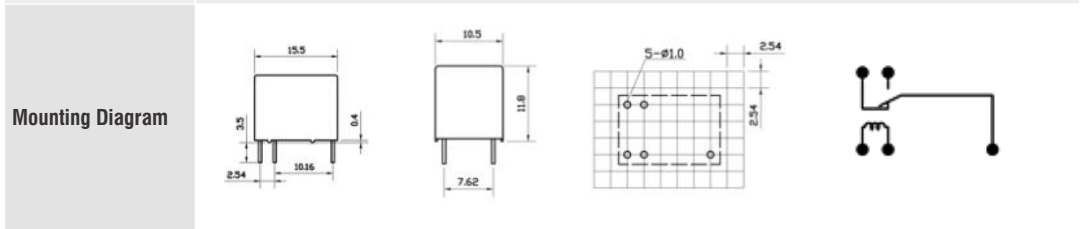

Application Telephone, Fax Machine, Cordless Phone, Server, Modem, etc.