

AU OPTRONICS CORPORATION

Product Specification

19.0" SXGA Color TFT-LCD Module

Model Name: M190EN03 V.2

Approved by	Prepared by
<i>CC Chiu</i>	<i>Belinda Chen</i>

DDBU Marketing Division / AU Optronics corporation

Customer	Checked & Approved by

Product Specification

19.0" SXGA Color TFT-LCD Module Model Name: M190EN03 V.2

() Preliminary Specifications
(◆) Final Specifications

Note: This Specification is subject to change without notice.

Contents

1.0 Handling Precautions	6
2.0 General Description	7
2.1 Display Characteristics.....	7
2.2 Optical Characteristics	8
3.0 Functional Block Diagram	11
4.0 Absolute Maximum Ratings	12
4.1 TFT LCD Module.....	12
4.2 Backlight Unit	12
4.3 Absolute Ratings of Environment	12
5.0 Electrical characteristics	13
5.1 TFT LCD Module.....	13
5.1.1 Power Specification	13
5.1.2 Signal Electrical Characteristics	14
5.2 Backlight Unit	15
6.0 Signal Characteristics	16
6.1 Pixel Format Image	16
6.2 The Input Data Format	16
6.3 Signal Description	17
6.4.1 Timing Characteristics	18
6.4.2 Timing Diagram.....	18
6.5 Power ON/OFF Sequence	20
7.0 Connector & Pin Assignment	21
7.1 TFT LCD Module.....	21
7.2 Backlight Unit	21
7.3 Signal for Lamp Connector	22
8.0 Vibration, Shock, and Drop	22
8.1 Vibration & Shock.....	22
8.2 Drop Test.....	22
9.0 Environment	22
9.1 Temperature and Humidity	23
9.1.1 Operating Conditions	23
9.1.2 Shipping Conditions.....	23
9.2 Atmospheric Pressure	23
9.3 Thermal Shock	23
10.0 Reliability	24
10.1 Failure Criteria.....	24

- 10.2 Failure Rate..... 24
 - 10.2.1 Usage..... 24
 - 10.2.2 Component De-rating 24
- 10.3 On/OFF Cycle 24
- 11.0 Safety 25**
 - 11.1 Sharp Edge Requirements 25
 - 11.2 Materials..... 25
 - 11.2.1 Toxicity..... 25
 - 11.2.2 Flammability..... 25
 - 11.3 Capacitors 25
- 12.0 Other requirement 25**
 - 12.1 National Test Lab Requirement 25
 - 12.2 Label 25
- 13.0 Mechanical Characteristics 26**

Record of Revision

Version and Date	Page	Old description	New Description	Remark
0.1 2005/03/14	All	First Edition for Customer	All	
0.2 2005/06/24	8	N/A	RoHS Compliance	Added
	9	Contrast Ratio:Min:500	Contrast Ratio:Min:750	Revised
1.0 2005/09/15		Finally Edition for customer	All	

0.-1. Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) In case if a module has to be put back into the packing container slot after once it was taken out from the container, do not press the center of the CCFL reflector edge. Instead, press at the far ends of the CCFL reflector edge softly. Otherwise the TFT module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT module.
- 11) After installation of the TFT module into an enclosure (Desktop monitor Bezel, for example), do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT module from outside. Otherwise the TFT module may be damaged.

2.0 General Description

This specification applies to the 19.0 inch Color TFT-LCD Module M190EN03 V2.

The display supports the SXGA (1280(H) x 1024(V)) screen format and 16.7M colors (RGB 8-bits data).

All input signals are 2 Channel LVDS interface compatible.

This module does not contain an inverter card for backlight.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 condition:

ITEMS	Unit	SPECIFICATIONS			
Screen Diagonal	[mm]	480(19")			
Active Area	[mm]	376.32 (H) x 301.056 (V)			
Pixels H x V		1280(x3) x 1024			
Pixel Pitch	[mm]	0.294 (per one triad) x 0.294			
Pixel Arrangement		R.G.B. Vertical Stripe			
Display Mode		Normally Black			
White Luminance (Center)	[cd/m ²]	250 cd/m ² @7Ma (Typ)			
Contrast Ratio		1,000 : 1 (Typ)			
Optical Response Time	[msec]	8ms GTG (Avg. Typ.); 20ms (Typ on/off)			
Nominal Input Voltage VDD	[Volt]	+5.0 V			
Power Consumption (VDD line + CCFL line)	[Watt]	28W(Typ) (w/o Inverter, All white pattern)			
Weight	[Grams]	2500 (Max)			
Physical Size	[mm]		Min.	Typ.	Max.
		Horizontal(H)	395.5	396	396.5
		Vertical(V)	323.5	324	324.5
		Depth(D)	17.0	17.5	18.0
Electrical Interface		Dual channel LVDS, DE mode			
Support Color		16.7M colors (RGB 8-bit data)			
Surface Treatment		Anti-glare, hard coating (3H)			
Temperature Range	[°C]	0 to +50			
	[°C]	-20 to +60			
RoHS		RoHS Compliance			

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 °C :


Item	Unit	Conditions	Min.	Typ.	Max.	Note
Viewing Angle	[degree]	Horizontal (Right) CR = 10 (Left)	75	85	-	
	[degree]		75	85	-	
	[degree]	Vertical (Up) CR = 10 (Down)	75	85	-	
Contrast ratio		Normal Direction	750	1,000	-	
Response time	[msec]	Grey to Grey	-	8(Avg.)	16	Note 1
Color / Chromaticity Coordinates (CIE)		Red x	0.611	0.641	0.671	
		Red y	0.323	0.353	0.383	
		Green x	0.259	0.289	0.319	
		Green y	0.596	0.626	0.656	
		Blue x	0.112	0.142	0.172	
		Blue y	0.048	0.078	0.108	
Color Coordinates (CIE) White		White x	0.283	0.313	0.343	
		White y	0.299	0.329	0.359	
White Luminance at CCFL 7.0mA (central point)	[cd/m ²]		200	250	-	
Luminance Uniformity	[%]		75	80	-	Note 2
Crosstalk (in75Hz)	[%]				1.5	Note 3
Flicker	dB				-20	Note 4

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (PR 880, BM-5A / BM7, CS-1000, CA210, SR_3, EZ Contrast*, Optiscope& Westar TRD-100)

Aperture 1 ° with 100cm VD or 2 ° with 50cm viewing distance


Test Point Center (VESA point 9)

Environment < 1 lux

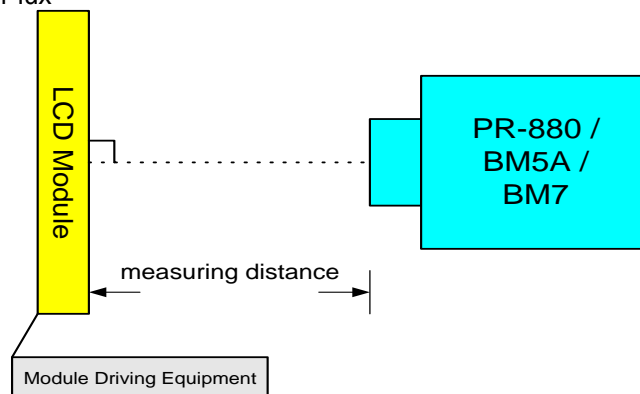

*' EZ Contrast is different measurement tool with very close viewing distance.

Note1: Definition of Response time:

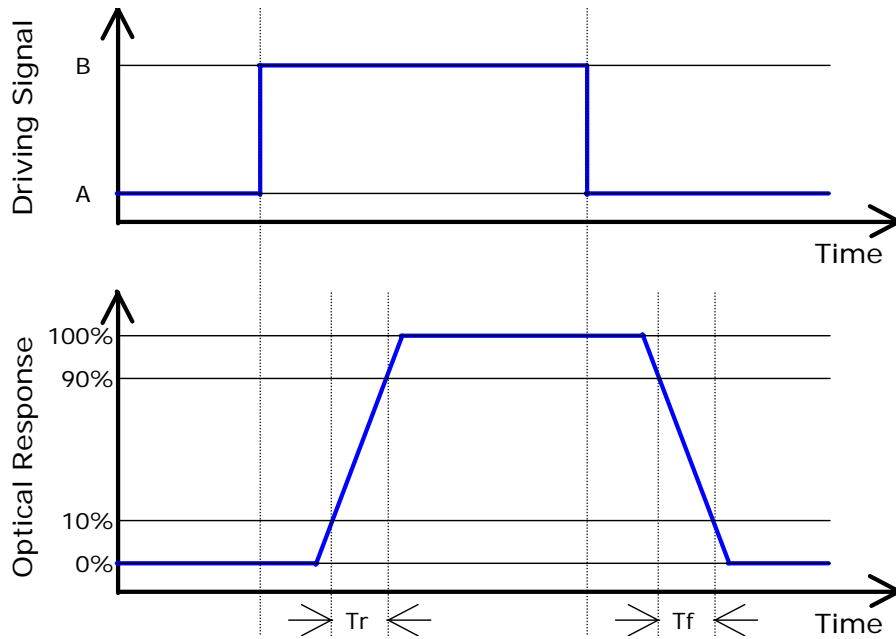


Algorithm:

$| \text{Level A} - \text{Level B} | \geq 16$ then the average of Grey-to-Grey response time is 8ms. (F= 60 Hz).


Tr_R (rising time; from “Full Black” to “Full White”) + Tr_F (Falling time; from “Full White” to “Full Black”) = 20ms(typ).

Note2: Brightness uniformity of these 9 points is defined as below

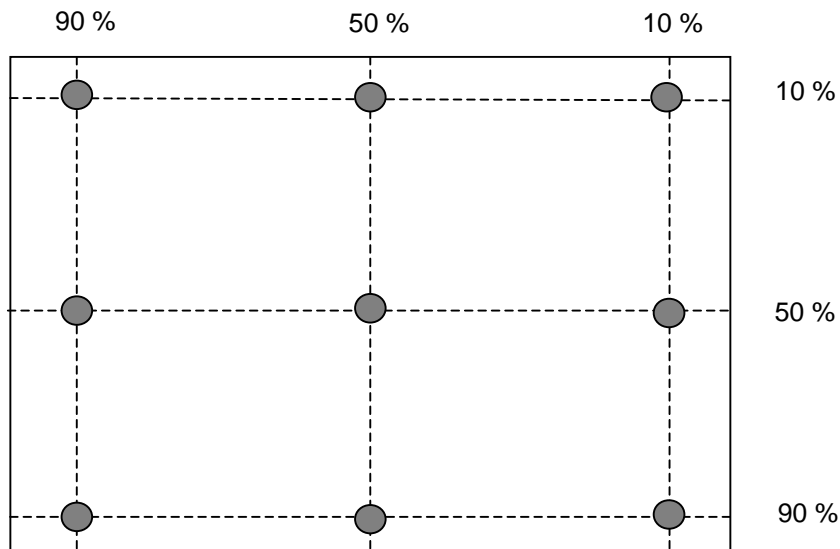

$$\text{Uniformity} = \frac{\text{Minimum Luminance in 9 points (1-9)}}{\text{Maximum Luminance in 9 Points (1-9)}}$$

Note 3: Crosstalk is defined as below :

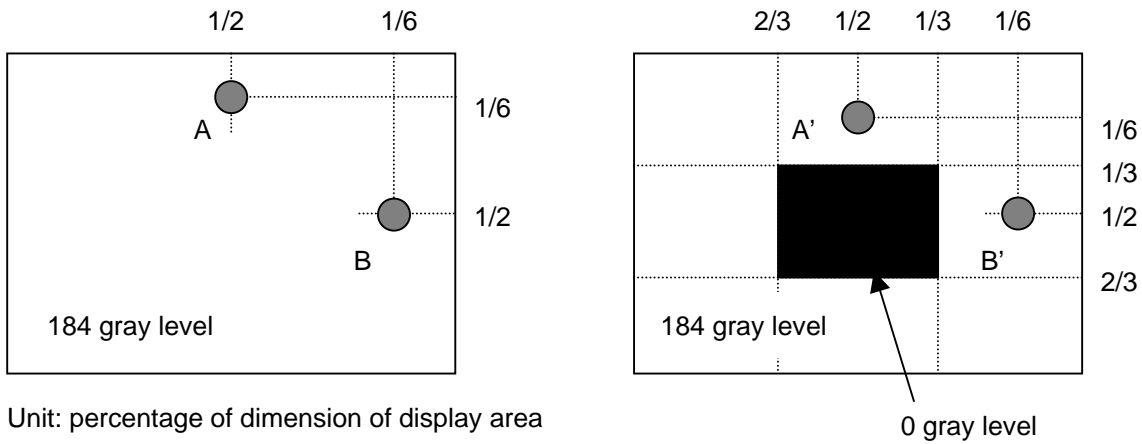


Unit: percentage of dimension of display area


$|L_A - L_{A'}| / L_A \times 100\% = 1.5\% \text{ max.}$, L_A and L_B are brightness at location A and B

$|L_B - L_{B'}| / L_B \times 100\% = 1.5\% \text{ max.}$, $L_{A'}$ and $L_{B'}$ are brightness at location A' and B'

Note 4: Test Pattern: Subchecker Pattern

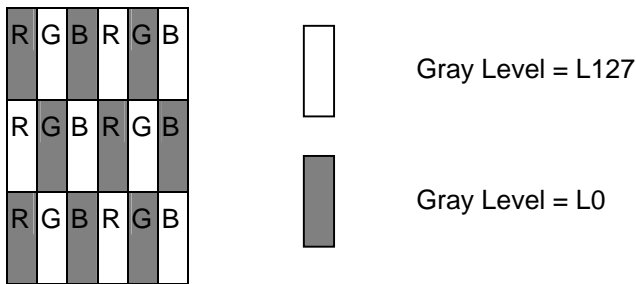


Method: Record dBV & DC value with (WESTAR)TRD-100

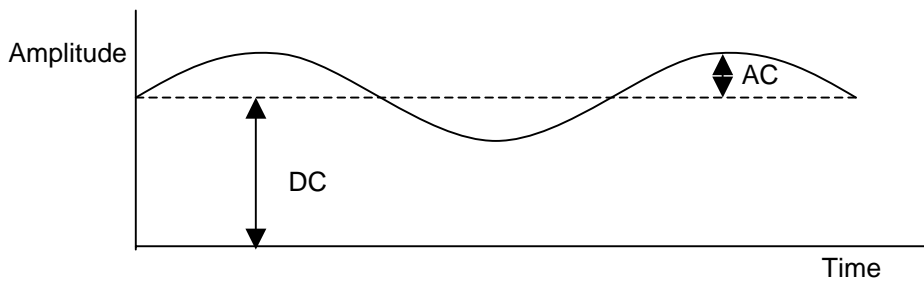

$$\text{Flicker (dB)} = 20 \log \frac{\text{AC Level (at 30 Hz)}}{\text{DC Level}}$$

3.0 Functional Block Diagram

The following diagram shows the functional block of the 19.0 inches wide Color TFT/LCD Module:

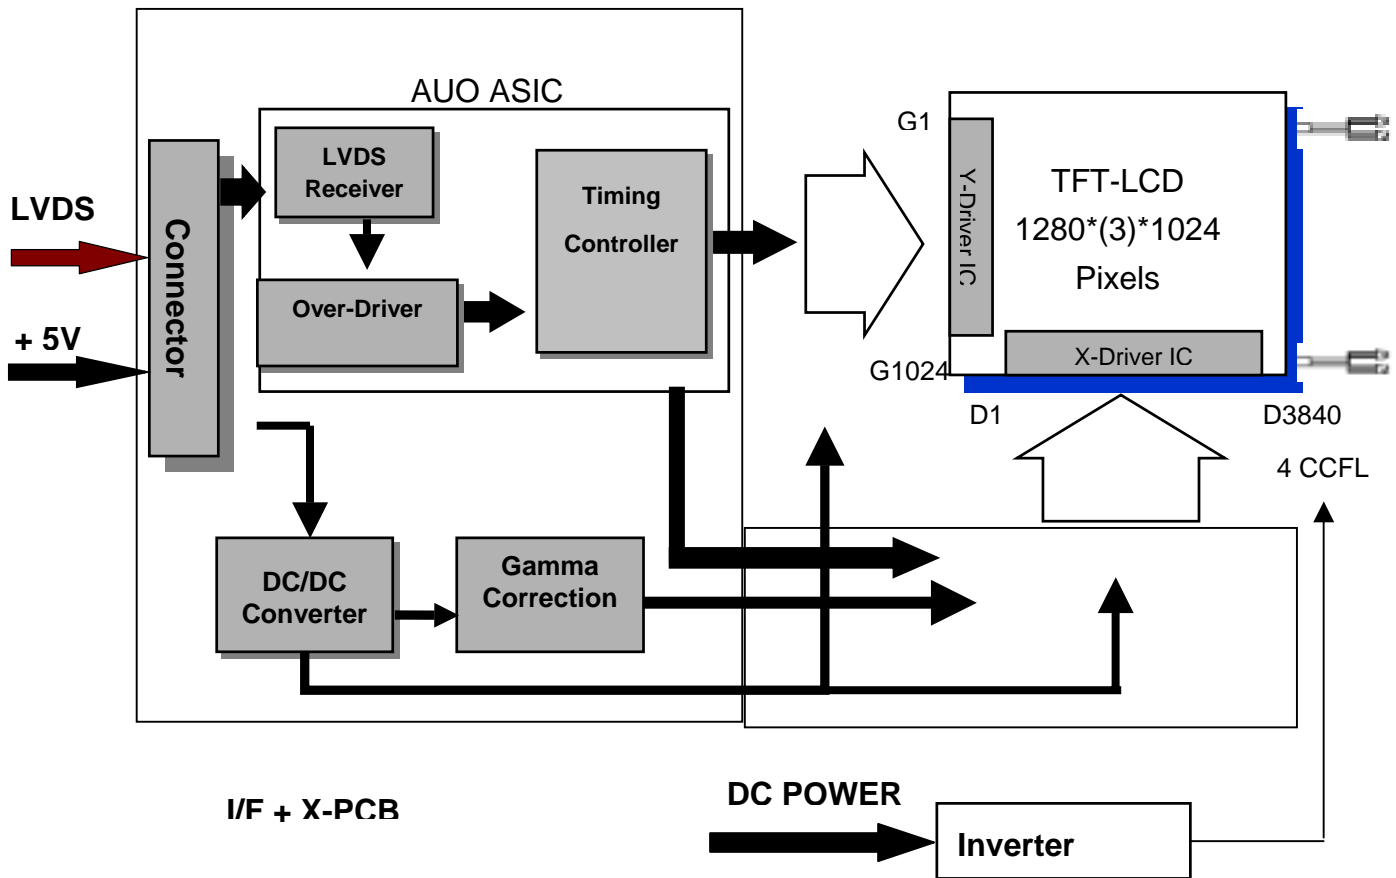

HIROSE MDF76KBW-30S-1H(58)

JST BHSR-02VS-1

Mating Type:
HIROSE MDF 76G-30P-1SD

Mating Type:
SM02B-BHSS-1-TB

4.0 Absolute Maximum Ratings

Absolute maximum ratings of the module is as following:

4.1 TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	VIN	-0.3	+5.5	[Volt]	Note 1,2

4.2 Backlight Unit

Item	Symbol	Min	Max	Unit	Conditions
CCFL Current	ICFL	-	7.5	[mA] rms	Note 1,2

4.3 Absolute Ratings of Environment

Item	Symbol	Min	Max	Unit	Conditions
Operating Humidity	HOP	5	90	[%RH]	Note 3
Storage Temperature	TST	-20	+60	[°C]	Note 3
Storage Humidity	HST	5	90	[%RH]	Note 3


Please refer the graph below for corresponding of Min/Max values of temperature and humidity.

Note 1: With in T_a (25)

Note 2: Permanent damage to the device may occur if exceed maximum values

Note 3: For quality performance, please refer to AUO IIS(Incoming Inspection Standard).

Relative Humidity %

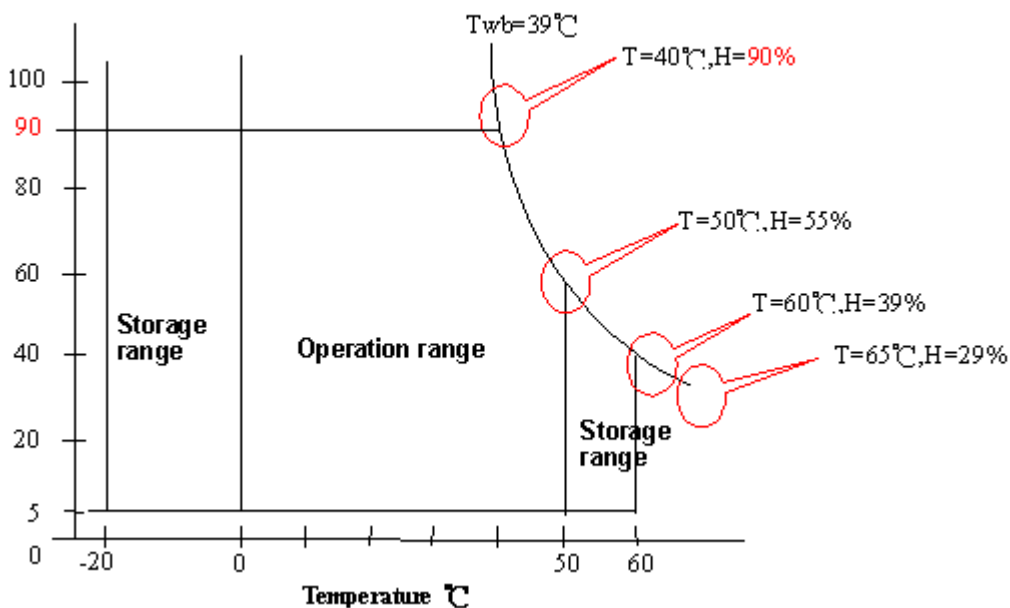

5.0 Electrical characteristics


5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are as follows;

Symbol	Parameter	Min	Typ	Max	Units	Condition
VDD	Logic/LCD Drive Voltage	4.5	5	5.5	[Volt]	± 10%
IDD	VDD current	-	1400	1800	[mA]	Vin=5V , All White Pattern, +30%, at 75Hz
Irush	LCD Inrush Current	-	-	3.5	[A]	Note
PDD	VDD Power	-	7	9	[Watt]	Vin=5V , All White Pattern, +30%, at 75Hz
VDDrp	Allowable Logic/LCD Drive Ripple Voltage			100	[mV] p-p	
VDDns	Allowable Logic/LCD Drive Ripple Voltage			100	[mV] p-p	

Note: Measurement conditions:

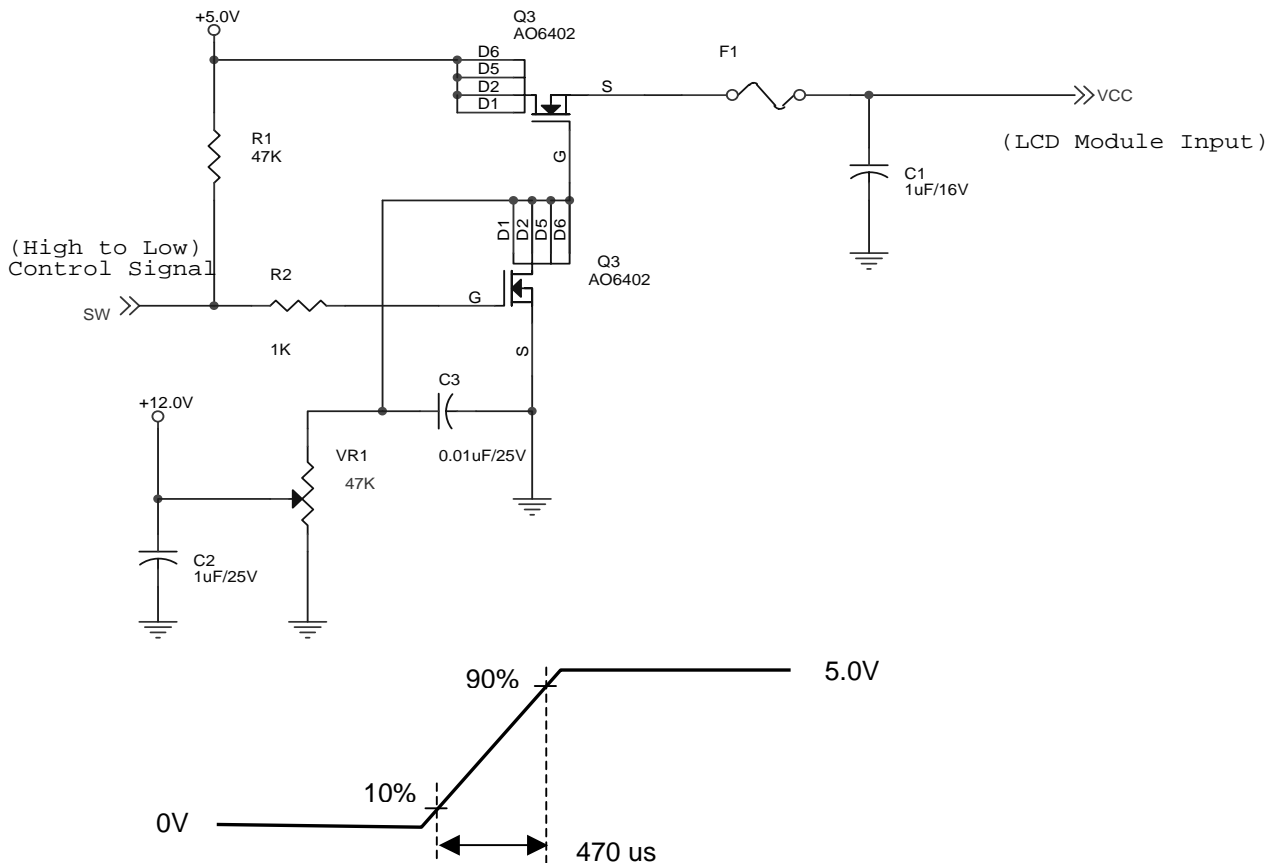

Vin rising time

5.1.2 Signal Electrical Characteristics


Input signals shall be low or Hi-Z state when V_{in} is off

It is recommended to refer the specifications of SN75LVDS82DGG (Texas Instruments) in detail.

Each signal characteristics are as follows;

Symbol	Parameter	Min	Typ	Max	Units	Condition
VTH	Differential Input High Threshold	-	-	+100	[mV]	$V_{ICM} = 1.2V$ Note
VTL	Differential Input Low Threshold	-100	-	-	[mV]	$V_{ICM} = 1.2V$ Note
VID	Input Differential Voltage	100	400	600	[mV]	Note
VICM	Differential Input Common Mode Voltage	+1.0	+1.2	+1.35	[V]	$V_{TH}/V_{TL} = \pm 100mV$ Note

Note: LVDS Signal Waveform

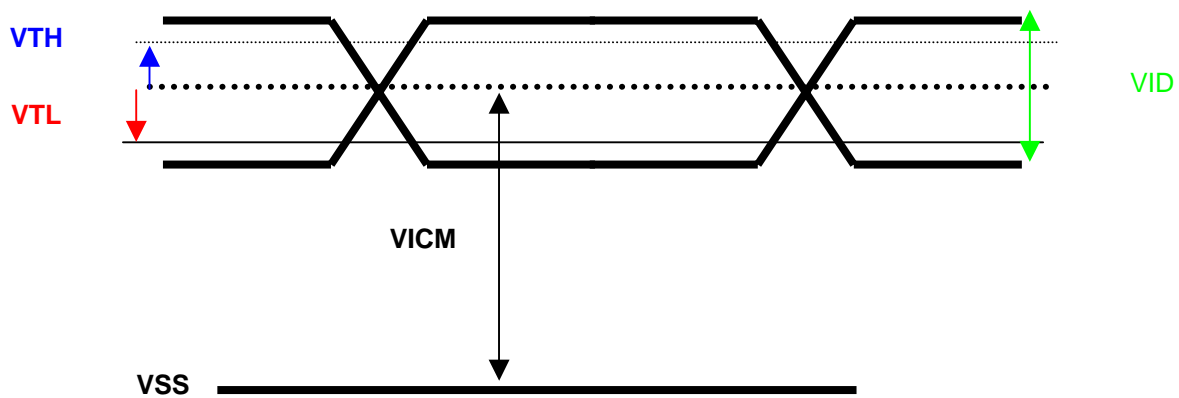

5.2 Backlight Unit

Parameter guideline for CCFL Inverter

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
ISCFL	CCFL standard current	6.5	7.0	7.5	[mA] rms	(Ta=25°C) Note 1
IRCFL	CCFL operation range	2.5	7.0	7.5	[mA] rms	(Ta=25°C)
FCFL	CCFL Frequency	40	50	60	[KHz]	(Ta=25°C) Note 2
ViCFL (0°C)	CCFL Ignition Voltage (End of the lamp wire connector)	1810	-	-	[Volt] rms	(Ta=0°C) Note 3
ViCF (25°C)	CCFL Ignition Voltage (End of the lamp wire connector)	1540	-	-	[Volt] rms	(Ta=25°C) Note 3
VCFL	CCFL Operation Voltage (for reference)	-	750 @7mA	800	[Volt] rms	(Ta=25°C) Note 4
PCFL	CCFL Power consumption (for reference)	-	21	23.1	[Watt]	(Ta=25°C) Note 5
LTCFL	CCFL life Time	40,000	50,000	-	[Hour]	(Ta=25°C) Note 6

Note 1: CCFL standard current is measured at 25±2 ..

Note 2: CCFL Frequency should be carefully determined to avoid interference between inverter and TFT LCD

Note 3: ViCFL means Ignition Voltage for both ends of the lamp, and CCFL inverter should be able to give out a power that has a generating capacity of over 1810 voltage. Lamp units need 1810 voltage minimum for ignition

Note 4: CCFL operation voltage is measured at 25±2 ..


Note 5: The variance of CCFL power consumption is ± 10%. Calculator value for reference
(ICFL×VCFL×4=PCFL).

Note 6: Definition of life: brightness becomes 50% or less than the minimum luminance value of CCFL..The typical life time of CCFL is on the condition at 7.0mA lamp current.


6.0 Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

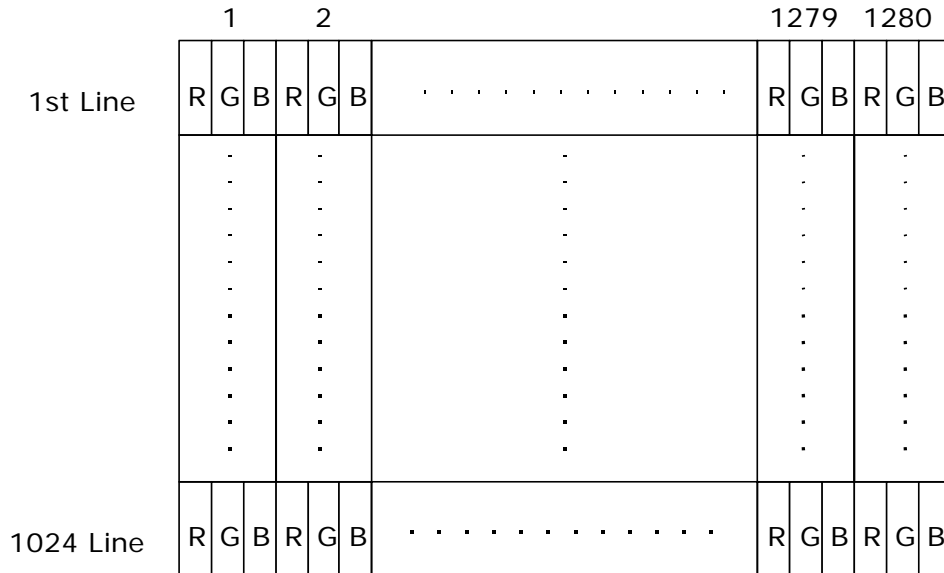

6.2 The input data format

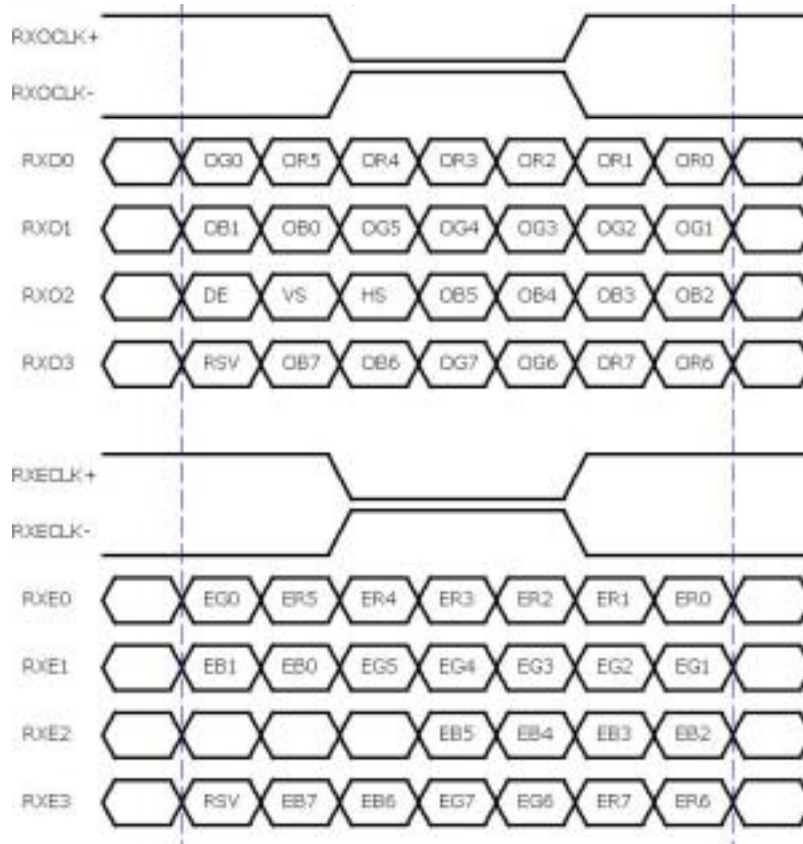


Note 1: R/G/B data 7:MSB, R/G/B data 0:LSB
 O = "First Pixel Data"
 E = "Second Pixel Data"

6.3 Signal Description

The module using one LVDS receiver SN75LVDS82(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

PIN #	SIGNAL NAME	DESCRIPTION
1	RxOIN0-	Negative LVDS differential data input (Odd data)
2	RxOIN0+	Positive LVDS differential data input (Odd data)
3	RxOIN1-	Negative LVDS differential data input (Odd data)
4	RxOIN1+	Positive LVDS differential data input (Odd data)
5	RxOIN2-	Negative LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
6	RxOIN2+	Positive LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
7	VSS	Power Ground
8	RxOCLKIN-	Negative LVDS differential clock input (Odd clock)
9	RxOCKIN+	Positive LVDS differential clock input (Odd clock)
10	RxOIN3-	Negative LVDS differential data input (Odd data)
11	RxOIN3+	Positive LVDS differential data input (Odd data)
12	RxEIN0-	Negative LVDS differential data input (Even clock)
13	RxEIN0+	Positive LVDS differential data input (Even data)
14	VSS	Power Ground
15	RxEIN1-	Negative LVDS differential data input (Even data)
16	RxEIN1+	Positive LVDS differential data input (Even data)
17	VSS	Power Ground
18	RxEIN2-	Negative LVDS differential data input (Even data)
19	RxEIN2+	Positive LVDS differential data input (Even data)
20	RxECLKIN-	Negative LVDS differential clock input (Even clock)
21	RxECLKIN+	Positive LVDS differential clock input (Even clock)
22	RxEIN3-	Negative LVDS differential data input (Even data)
23	RxEIN3+	Positive LVDS differential data input (Even data)
24	VSS	Power Ground
25	VSS	Power Ground
26	NC	-
27	VSS	Power Ground
28	VCC	+5.0V Power Supply
29	VCC	+5.0V Power Supply
30	VCC	+5.0V Power Supply

Note1: Start from left side

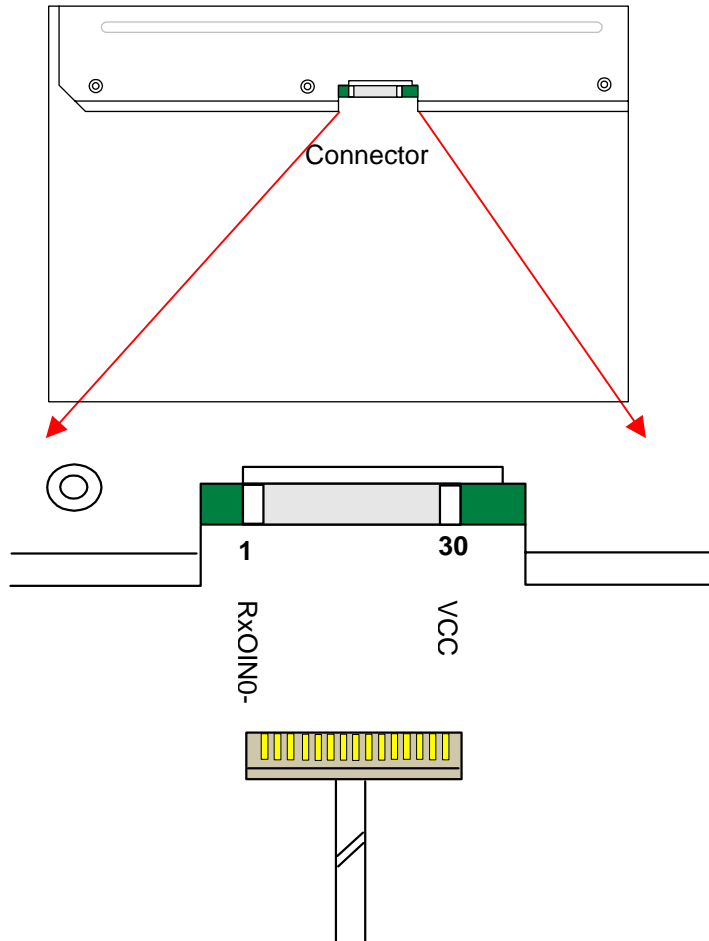

Note2: Input signals of odd and even clock shall be the same timing.


6.4.1 Timing Characteristics

Basically, interface timings described here is not actual input timing of LCD module but output timing of SN75LVDS82DGG (Texas Instruments) or equivalent.

Signal	Item	Symbol	Min	Typ	Max	Unit
Vertical Section	Period	T_v	1035	-	2048	Th
	Active	$T_{disp(v)}$	1024	1024	1024	Th
	Blanking	$T_{bp(v)}+T_{fp(v)}+PW_{vs}$	11	-	1024	Th
Horizontal Section	Period	T_h	720	-	1024	Tclk
	Active	$T_{disp(h)}$	640	640	640	Tclk
	Blanking	$T_{bp(h)}+T_{fp(h)}+PW_{hs}$	80	-	384	Tclk
Clock	Period	T_{clk}	12	-	-	ns
	Frequency	Freq	30	-	83	MHz
Frame Rate	Frequency	F	50	60	75	Hz


Note : DE mode only

6.4.2 Timing diagram

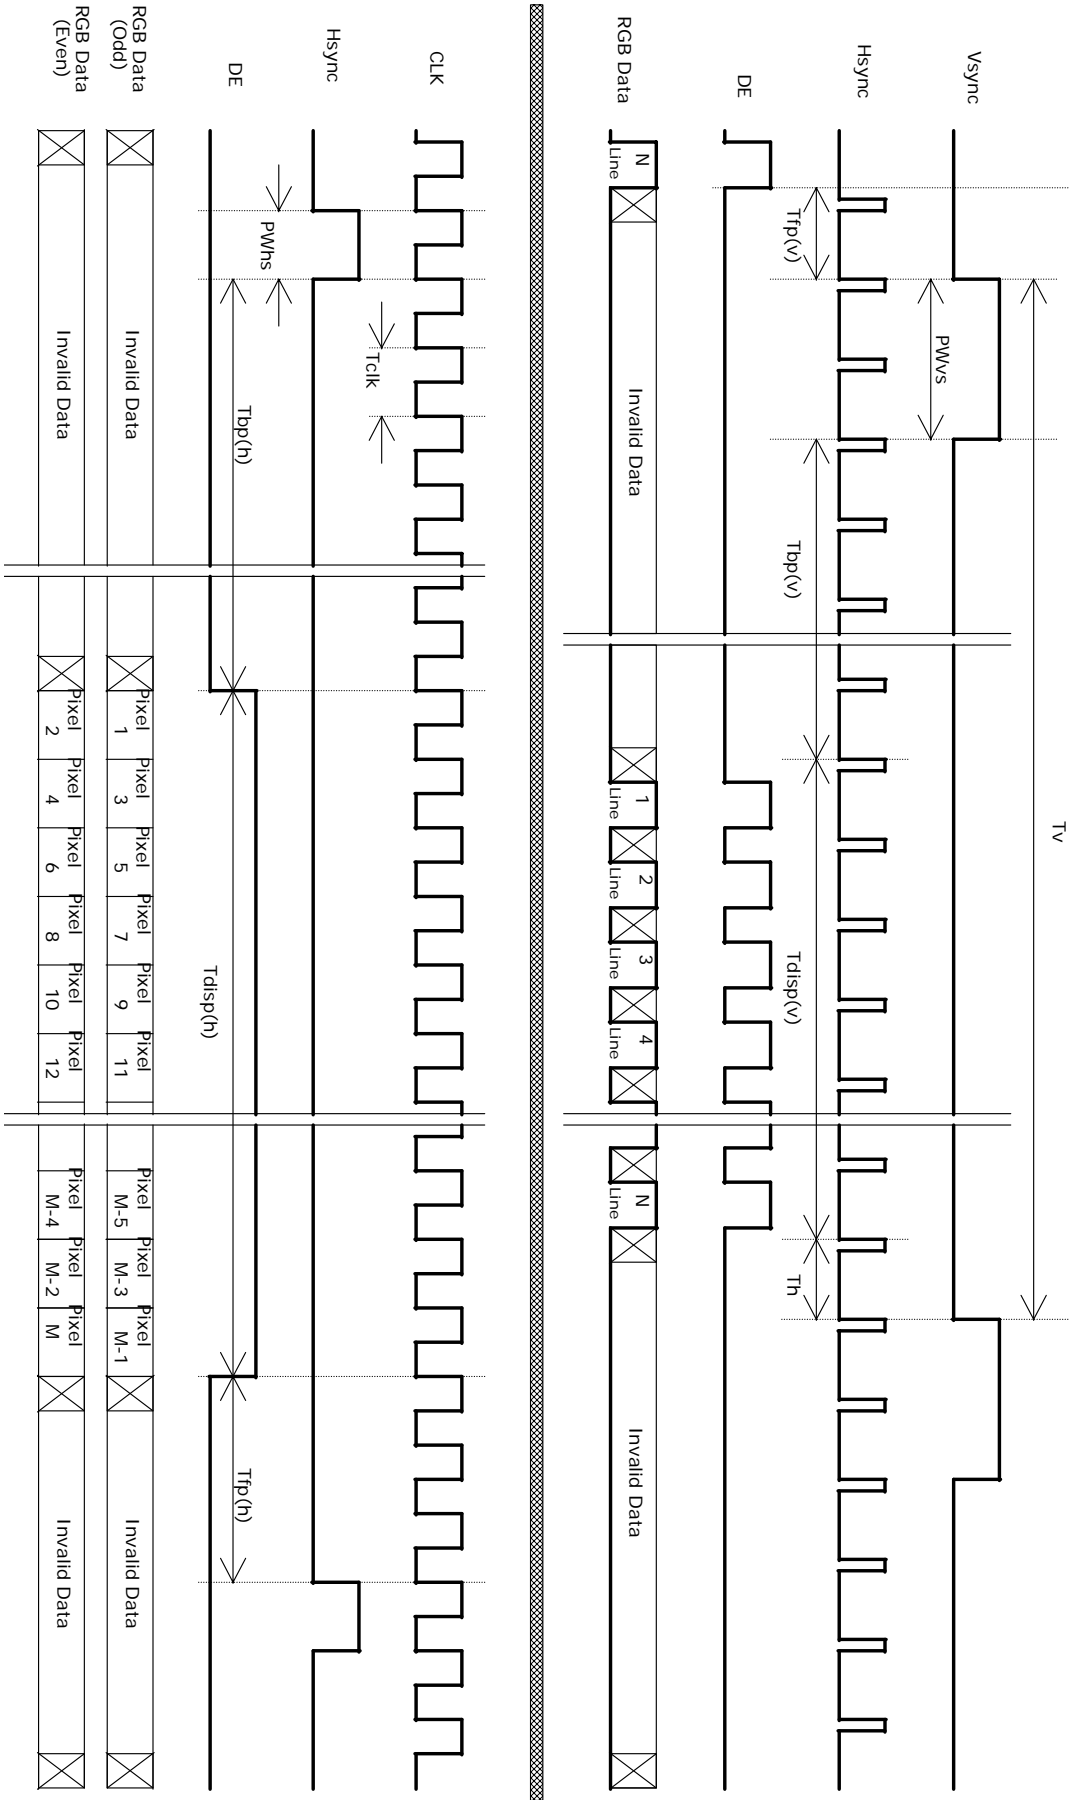

6.5 Power ON/OFF Sequence

Vin power and lamp on/off sequence is as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when Vin is off.

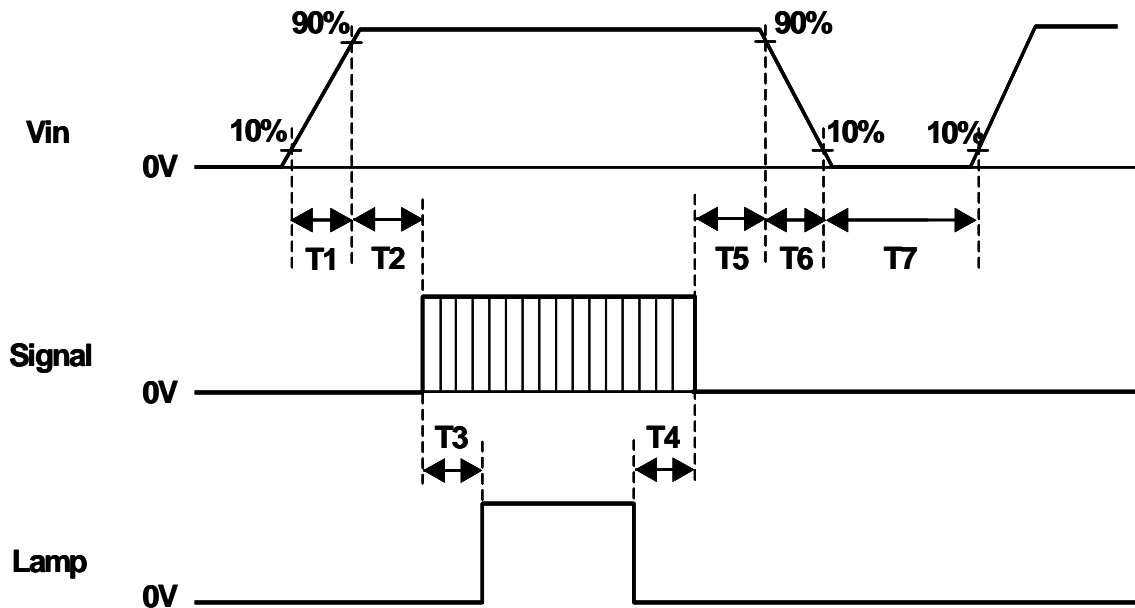

Symbol	Values			Unit
	Min	Typ	Max	
T1	0.5	-	10	[ms]
T2	0.5	40	50	[ms]
T3	200	-	-	[ms]
T4	200	-	-	[ms]
T5	0.5	16	50	[ms]
T6	0.5	-	10	[ms]
T7	1000	-	-	[ms]

7.0 Connector & Pin Assignment

Physical interface is described as for the connector on module.

These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT LCD Module

Connector Name / Designation	Interface Connector / Interface card
Manufacturer	HIROSE/ JAE or compatible
Type Part Number	MDF 76KBW-30S-1H(58)/ FI-XB30SL-HF10
Mating Housing Part Number	MDF 70G-30P-1SD/ FI-X30HL-T (Locked Type), FI-X30S-H (Unlocked Type)

Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	VSS	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	VSS
15	RxEIN1-	16	RxEIN1+
17	VSS	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	VSS
25	NC	26	NC
27	NC	28	VCC
29	VCC	30	VCC

7.2 Backlight Unit

Connector Name / Designation	Lamp Connector / Backlight lamp
Manufacturer	JST
Type Part Number	BHSR-02VS-1
Mating Type Part Number	SM02B-BHSS-1-TB

7.3 Signal for Lamp connector

	Connector No.	Pin No.	Input	Color	Function
Upper	CN1	1	Hot1	Pink	High Voltage
		2	Cold1	White	Low Voltage
	CN2	1	Hot2	Blue	High Voltage
		2	Cold2	Black	Low Voltage
Lower	CN3	1	Hot1	Pink	High Voltage
		2	Cold1	White	Low Voltage
	CN4	1	Hot2	Blue	High Voltage
		2	Cold2	Black	Low Voltage

8.0 Vibration, Shock, and Drop

8.1 Vibration & Shock

Vibration Test Spec:

- Frequency: 10 - 200Hz
- Sweep: 30 Minutes each Axis (X, Y, Z)
- Acceleration: 1.5G(10~200Hz P- P)
- Test method:

Acceleration (G)	1.5
Frequency (Hz)	10~200~10
Active time (min)	30

Shock Test Spec:

Acceleration (G) -a	50
Active time -b	20 ms
Wave form	Half-sin
Times	1

- Direction: $\pm X$, $\pm Y$, $\pm Z$

8.2 Drop test

Package test: The drop height is 60cm.

9.0 Environment

The display module will meet the provision of this specification during operating condition or after storage or shipment condition specified below. Operation at 10% beyond the specified range will not cause physical damage to the unit.

9.1 Temperature and Humidity

9.1.1 Operating Conditions

The display module operates error free, when operated under the following conditions;

Temperature	0 °C to 50 °C
Relative Humidity	8% to 95%
Wet Bulb Temperature	39.0 °C

9.1.2 Shipping Conditions

The display module operates error free, after the following conditions;

Temperature	-20 °C to 60 °C
Relative Humidity	8% to 95%
Wet Bulb Temperature	39.0 °C

9.2 Atmospheric Pressure

The display assembly is capable of being operated without affecting its operations over the pressure range as following specified;

	Pressure	Note
Maximum Pressure	1040hPa	0m = sea level
Minimum Pressure	674hPa	3048m = 10.000 feet

Note : Non-operation attitude limit of this display module = 30,000 feet. = 9145 m.

9.3 Thermal Shock

The display module will not sustain damage after being subjected to 100 cycles of rapid temperature change. A cycle of rapid temperature change consists of varying the temperature from -20°C to 60°C, and back again.

Thermal shock cycle	-20 °C for 30min
	60 °C for 30min

Power is not applied during the test. After temperature cycling, the unit is placed in normal room ambient for at least 4 hours before powering on.

10.0 Reliability

This display module and the packaging of that will comply following standards.

10.1 Failure Criteria

The display assembly will be considered as failing unit when it no longer meets any of the requirements stated in this specification. Only as for maximum white luminance, following criteria is applicable.

- **Maximum white Luminance shall be 125cd/m² or more.**

10.2 Failure Rate

The average failure rate of the display module (from first power-on cycle till 1,000 hours later) will not exceed 1.0%. The average failure rate of the display module from 1,000 hours until 16,000 hours will not exceed 0.7% per 1000 hours.

10.2.1 Usage

The assumed usage for the above criteria is:

- 220 power-on hours per month
- 500 power on/off cycles per month
- Maximum brightness setting
- Operation to be within office environment (25⁰C typical)

10.2.2 Component De-rating

All the components used in this device will be checked the load condition to meet the failure rate criteria.

10.3 On/OFF Cycle

The display module will be capable of being operated over the following ON/OFF Cycles.

ON/OFF	Value	Cycles
+Vin and CCFL power	30,000	10 seconds on / 10 seconds off

11.0 Safety

11.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

11.2 Materials

11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO Toxicologist.

11.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

12.0 Other requirement

12.1 National Test Lab Requirement

The display module will satisfy all requirements for compliance to

UL 1950, First Edition
CSA C22.2 No.950-M89
EEC 950
EN 60 950


U.S.A. Information Technology Equipment
 Canada, Information Technology Equipment
 International, Information Technology Equipment
 International, Information Processing Equipment
 (European Norm for IEC950)

12.2 Label

The label is on the panel as shown below:




13.0 Mechanical Characteristics

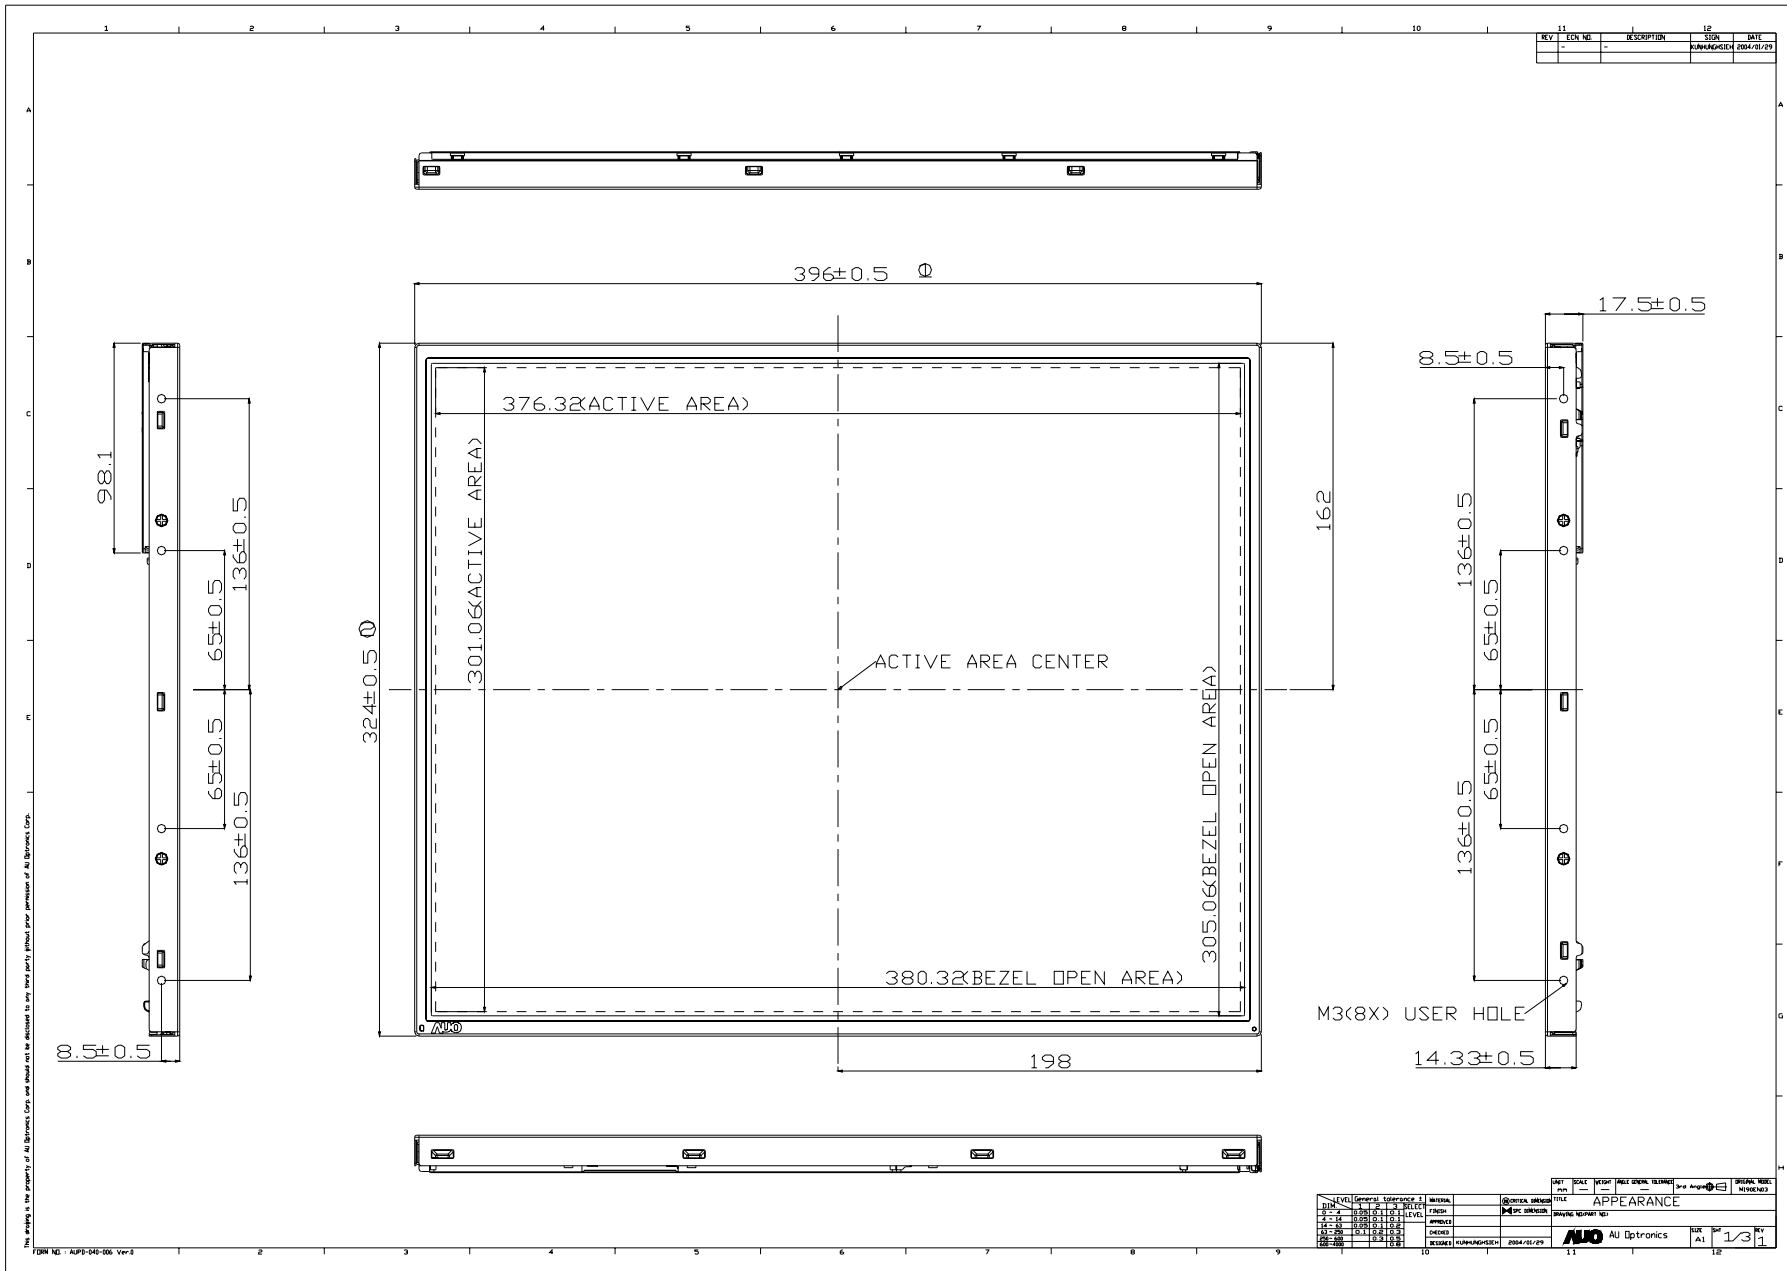


REV	LEN. NO.	DESCRIPTION	ISS. SIGN.	DATE
-	-	-	KUMARANGIRI	2024/01/29

LEVEL	GENERAL TOLERANCE	FINISH	OTHER FINISHES	APPEARANCE	UNIT	SCALE	REVISION	DATE	REV
1	±0.1	FRESH			MM	1:1			
2	±0.2								
3	±0.3								
4	±0.4								
5	±0.5								
6	±0.6								
7	±0.7								
8	±0.8								
9	±0.9								
10	±1.0								
11	±1.2								
12	±1.5								



REV	CON. NO.	DESCRIPTION	BY	DATE
-	-	-	KUMAKAGEISHI	2004/01/29

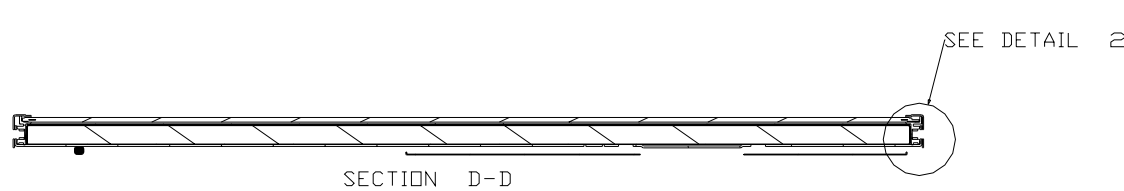


DEPTH OF USER HOLE
(THE SAME AS THE OTHERS)



DETAIL 2
SCALE 4.000

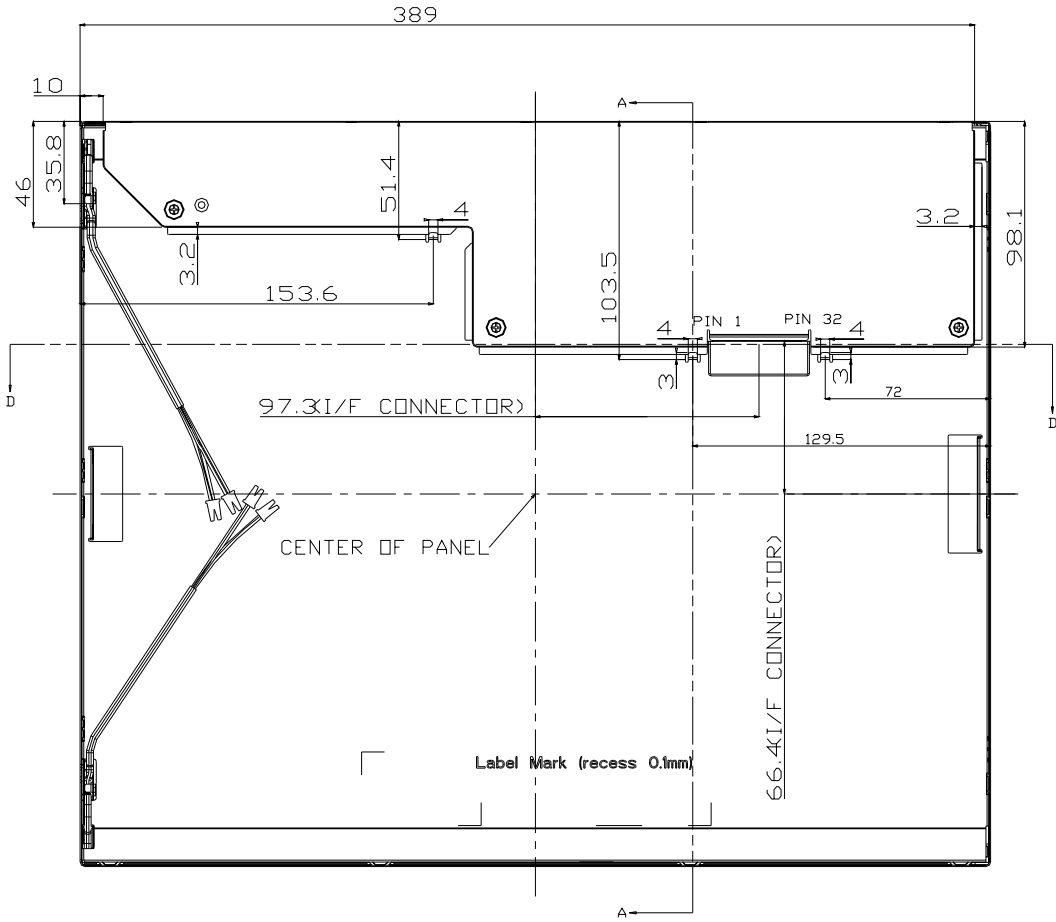

SEE DETAIL 1



DETAIL 1
SCALE 3.000



This drawing is the property of AU Optronics Corp. and should not be disclosed to any third party without prior permission of AU Optronics Corp.

LEVEL	GENERAL TOLERANCE	FINISH	CUTTING METHOD	APPEARANCE
1-1	±0.1	SP	DRILL	APPEARANCE
1-2	±0.05	SP	DRILL	APPEARANCE
1-3	±0.02	SP	DRILL	APPEARANCE
1-4	±0.01	SP	DRILL	APPEARANCE
1-5	±0.005	SP	DRILL	APPEARANCE
1-6	±0.002	SP	DRILL	APPEARANCE
1-7	±0.001	SP	DRILL	APPEARANCE
1-8	±0.0005	SP	DRILL	APPEARANCE
1-9	±0.0002	SP	DRILL	APPEARANCE
1-10	±0.0001	SP	DRILL	APPEARANCE
1-11	±0.00005	SP	DRILL	APPEARANCE
1-12	±0.00002	SP	DRILL	APPEARANCE
1-13	±0.00001	SP	DRILL	APPEARANCE
1-14	±0.000005	SP	DRILL	APPEARANCE
1-15	±0.000002	SP	DRILL	APPEARANCE
1-16	±0.000001	SP	DRILL	APPEARANCE
1-17	±0.0000005	SP	DRILL	APPEARANCE
1-18	±0.0000002	SP	DRILL	APPEARANCE
1-19	±0.0000001	SP	DRILL	APPEARANCE
1-20	±0.00000005	SP	DRILL	APPEARANCE
1-21	±0.00000002	SP	DRILL	APPEARANCE
1-22	±0.00000001	SP	DRILL	APPEARANCE
1-23	±0.000000005	SP	DRILL	APPEARANCE
1-24	±0.000000002	SP	DRILL	APPEARANCE
1-25	±0.000000001	SP	DRILL	APPEARANCE
1-26	±0.0000000005	SP	DRILL	APPEARANCE
1-27	±0.0000000002	SP	DRILL	APPEARANCE
1-28	±0.0000000001	SP	DRILL	APPEARANCE
1-29	±0.00000000005	SP	DRILL	APPEARANCE
1-30	±0.00000000002	SP	DRILL	APPEARANCE
1-31	±0.00000000001	SP	DRILL	APPEARANCE
1-32	±0.000000000005	SP	DRILL	APPEARANCE
1-33	±0.000000000002	SP	DRILL	APPEARANCE
1-34	±0.000000000001	SP	DRILL	APPEARANCE
1-35	±0.0000000000005	SP	DRILL	APPEARANCE
1-36	±0.0000000000002	SP	DRILL	APPEARANCE
1-37	±0.0000000000001	SP	DRILL	APPEARANCE
1-38	±0.00000000000005	SP	DRILL	APPEARANCE
1-39	±0.00000000000002	SP	DRILL	APPEARANCE
1-40	±0.00000000000001	SP	DRILL	APPEARANCE
1-41	±0.000000000000005	SP	DRILL	APPEARANCE
1-42	±0.000000000000002	SP	DRILL	APPEARANCE
1-43	±0.000000000000001	SP	DRILL	APPEARANCE
1-44	±0.0000000000000005	SP	DRILL	APPEARANCE
1-45	±0.0000000000000002	SP	DRILL	APPEARANCE
1-46	±0.0000000000000001	SP	DRILL	APPEARANCE
1-47	±0.00000000000000005	SP	DRILL	APPEARANCE
1-48	±0.00000000000000002	SP	DRILL	APPEARANCE
1-49	±0.00000000000000001	SP	DRILL	APPEARANCE
1-50	±0.000000000000000005	SP	DRILL	APPEARANCE
1-51	±0.000000000000000002	SP	DRILL	APPEARANCE
1-52	±0.000000000000000001	SP	DRILL	APPEARANCE
1-53	±0.0000000000000000005	SP	DRILL	APPEARANCE
1-54	±0.0000000000000000002	SP	DRILL	APPEARANCE
1-55	±0.0000000000000000001	SP	DRILL	APPEARANCE
1-56	±0.00000000000000000005	SP	DRILL	APPEARANCE
1-57	±0.00000000000000000002	SP	DRILL	APPEARANCE
1-58	±0.00000000000000000001	SP	DRILL	APPEARANCE
1-59	±0.000000000000000000005	SP	DRILL	APPEARANCE
1-60	±0.000000000000000000002	SP	DRILL	APPEARANCE
1-61	±0.000000000000000000001	SP	DRILL	APPEARANCE
1-62	±0.0000000000000000000005	SP	DRILL	APPEARANCE
1-63	±0.0000000000000000000002	SP	DRILL	APPEARANCE
1-64	±0.0000000000000000000001	SP	DRILL	APPEARANCE
1-65	±0.00000000000000000000005	SP	DRILL	APPEARANCE
1-66	±0.00000000000000000000002	SP	DRILL	APPEARANCE
1-67	±0.00000000000000000000001	SP	DRILL	APPEARANCE
1-68	±0.000000000000000000000005	SP	DRILL	APPEARANCE
1-69	±0.000000000000000000000002	SP	DRILL	APPEARANCE
1-70	±0.000000000000000000000001	SP	DRILL	APPEARANCE
1-71	±0.0000000000000000000000005	SP	DRILL	APPEARANCE
1-72	±0.0000000000000000000000002	SP	DRILL	APPEARANCE
1-73	±0.0000000000000000000000001	SP	DRILL	APPEARANCE
1-74	±0.00000000000000000000000005	SP	DRILL	APPEARANCE
1-75	±0.00000000000000000000000002	SP	DRILL	APPEARANCE
1-76	±0.00000000000000000000000001	SP	DRILL	APPEARANCE
1-77	±0.000000000000000000000000005	SP	DRILL	APPEARANCE
1-78	±0.000000000000000000000000002	SP	DRILL	APPEARANCE
1-79	±0.000000000000000000000000001	SP	DRILL	APPEARANCE
1-80	±0.0000000000000000000000000005	SP	DRILL	APPEARANCE
1-81	±0.0000000000000000000000000002	SP	DRILL	APPEARANCE
1-82	±0.0000000000000000000000000001	SP	DRILL	APPEARANCE
1-83	±0.00000000000000000000000000005	SP	DRILL	APPEARANCE
1-84	±0.00000000000000000000000000002	SP	DRILL	APPEARANCE
1-85	±0.00000000000000000000000000001	SP	DRILL	APPEARANCE
1-86	±0.000000000000000000000000000005	SP	DRILL	APPEARANCE
1-87	±0.000000000000000000000000000002	SP	DRILL	APPEARANCE
1-88	±0.000000000000000000000000000001	SP	DRILL	APPEARANCE
1-89	±0.0000000000000000000000000000005	SP	DRILL	APPEARANCE
1-90	±0.0000000000000000000000000000002	SP	DRILL	APPEARANCE
1-91	±0.0000000000000000000000000000001	SP	DRILL	APPEARANCE
1-92	±0.00000000000000000000000000000005	SP	DRILL	APPEARANCE
1-93	±0.00000000000000000000000000000002	SP	DRILL	APPEARANCE
1-94	±0.00000000000000000000000000000001	SP	DRILL	APPEARANCE
1-95	±0.000000000000000000000000000000005	SP	DRILL	APPEARANCE
1-96	±0.000000000000000000000000000000002	SP	DRILL	APPEARANCE
1-97	±0.000000000000000000000000000000001	SP	DRILL	APPEARANCE
1-98	±0.0000000000000000000000000000000005	SP	DRILL	APPEARANCE
1-99	±0.0000000000000000000000000000000002	SP	DRILL	APPEARANCE
1-100	±0.0000000000000000000000000000000001	SP	DRILL	APPEARANCE

REV	ECN NO.	DESCRIPTION	IS	DATE
-	-	-	SIGN	-

NOTE:


- 1.PRELIMINARY DRAWING FOR REFERENCE ONLY.
- 2.THE DIMENSION EXCLUDES DEFORMATION.
- 3.MODULE THICKNESS SHOULD BE 18mm MAX.
- 4.TOLERANCE WITHOUT NOTICED TO BE ±0.5mm.
- 5.LAMP CABLE CONNECTOR TO BE JST BHSR-02VS-1
- 6.I/F CONNECTOR TO BE JAE FI-XB30SL-HF10.
- 7.M3 USER HOLE SCREW TORQUE 4.0kg-cm MAX.
- 8.USER HOLE SCREW PENETRATION 4.5mm MAX.
- 9.DIMENSION TOLERANCE,ABSOLUTE VALUES OF A-B AND C-D MAX MUST BE 1.0
- 10.CABLE LENGTH FROM CONSTRAIN TO FREE END MUST BE 140±10 mm
TOTAL CABLE LENGTH MUST BE 170±10 mm

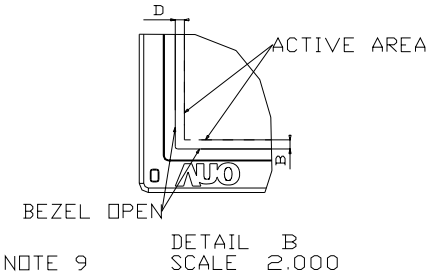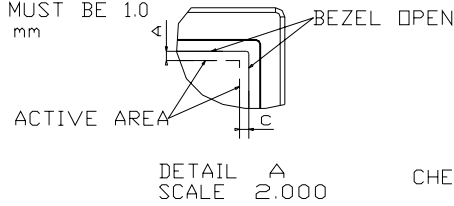

CHECK NOTE 9


THICKNESS 18mm MAX THIS AREA

SEE DETAIL A

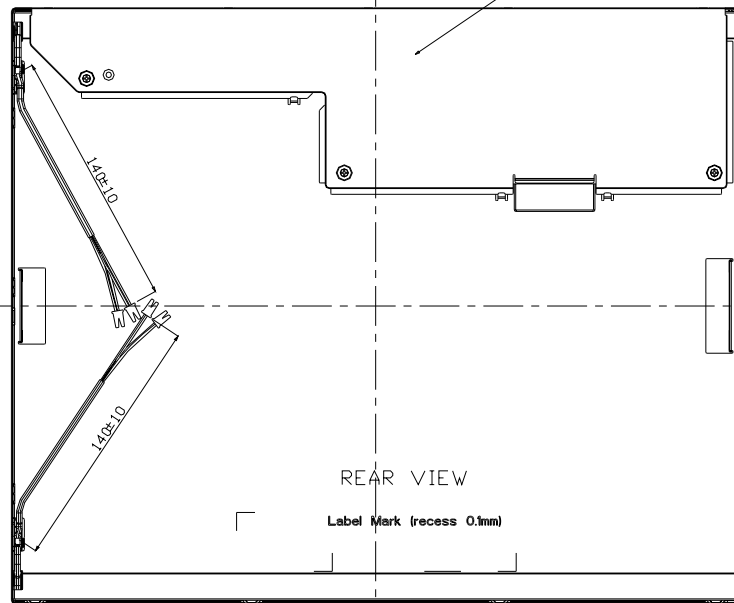

SCALE 0.800

SEE DETAIL B

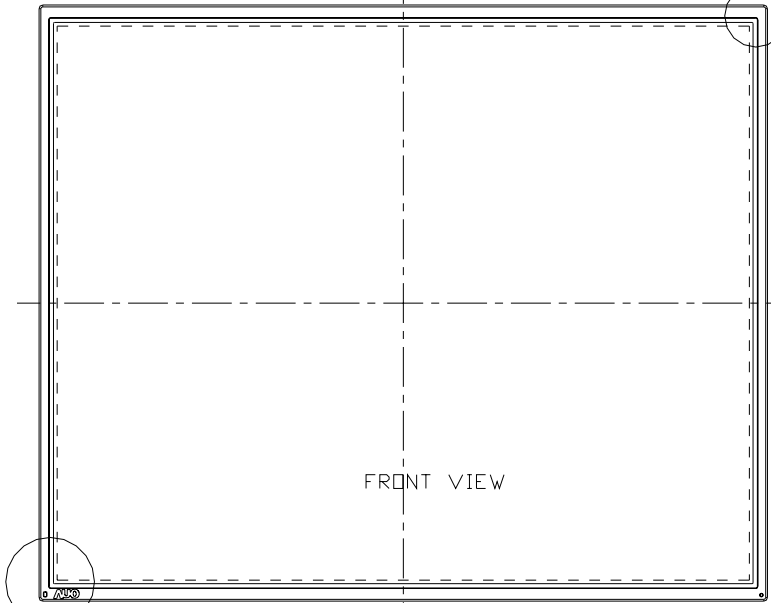

SCALE 0.800

This drawing is the property of AU Optronics Corp. and should not be disclosed to any third party without prior permission of AU Optronics Corp.

REV	SCALE	HEIGHT	WAVELENGTH TOLERANCE	VIEW ANGLE	REMARK
1	0.800	1.0	±0.5	90°	APPEARANCE
2	0.800	1.0	±0.5	90°	APPEARANCE
3	0.800	1.0	±0.5	90°	APPEARANCE
4	0.800	1.0	±0.5	90°	APPEARANCE
5	0.800	1.0	±0.5	90°	APPEARANCE
6	0.800	1.0	±0.5	90°	APPEARANCE
7	0.800	1.0	±0.5	90°	APPEARANCE
8	0.800	1.0	±0.5	90°	APPEARANCE
9	0.800	1.0	±0.5	90°	APPEARANCE
10	0.800	1.0	±0.5	90°	APPEARANCE
11	0.800	1.0	±0.5	90°	APPEARANCE
12	0.800	1.0	±0.5	90°	APPEARANCE

AU Optronics
REV A1 3/3 1