



# Product Specification

M190PTN01.0

AU Optronics Corporation

(  ) Preliminary Specification

(  ) Final Specification

Module	19" WXGA+ Color TFT-LCD
Model Name	M190PTN01.0

<p><b>Customer</b> _____ <b>Date</b> _____</p> <p><b>Approved by</b> _____ <b>Prepared by</b> _____</p> <p>_____   _____</p> <p>Note: This Specification is subject to change without notice.</p>	<p><b>Approved by</b> _____ <b>Date</b> _____</p> <p><u>Howard Lee</u> <u>2013/02/01</u></p> <p><b>Prepared by</b> _____ <b>Date</b> _____</p> <p><u>Amy Wu</u> <u>2013/02/01</u></p> <p>Desktop Display Business Group / AU Optronics Corporation</p>
---	--



# Product Specification

M190PTN01.0

AU Optronics Corporation

## Content

<b>1</b>	<b>HANDLING PRECAUTIONS</b>	<b>4</b>
<b>2</b>	<b>GENERAL DESCRIPTION</b>	<b>5</b>
2.1	Display Characteristics	5
2.2	Optical Characteristics	6
<b>3</b>	<b>FUNCTIONAL BLOCK DIAGRAM</b>	<b>10</b>
<b>4</b>	<b>ABSOLUTE MAXIMUM RATINGS</b>	<b>11</b>
4.1	TFT LCD Module	11
4.2	Backlight Unit	11
4.3	Absolute Ratings of Environment	11
<b>5</b>	<b>ELECTRICAL CHARACTERISTICS</b>	<b>13</b>
5.1	TFT LCD Module	13
5.1.1	Power Specification	13
5.1.2	Signal Electrical Characteristics	14
5.2	Backlight Unit	16
<b>6</b>	<b>SIGNAL CHARACTERISTICS</b>	<b>17</b>
6.1	Pixel Format Definition	17
6.2	Input Data Format Definition	17
6.3	Signal Description	18
6.4	Timing Characteristics	20
6.5	Timing Diagram	21
6.6	Power ON/OFF Sequence	22
<b>7</b>	<b>CONNECTOR AND PIN ASSIGNMENT</b>	<b>23</b>
7.1	TFT LCD Module	23
7.1.1	Pin Assignment	23
7.2	LED Connector on Backlight Unit	24
7.2.1	LED Pin assignment	24
7.2.2	LED Connector Dimension	25
7.2.3	LED Mating housing dimension	25
<b>8</b>	<b>RELIABILITY TEST</b>	<b>26</b>
<b>9</b>	<b>SHIPPING LABEL</b>	<b>27</b>
<b>10</b>	<b>MECHANICAL CHARACTERISTICS</b>	<b>28</b>
<b>11</b>	<b>PACKING SPECIFICATION</b>	<b>29</b>
11.1	Packing Flow	29
11.2	Pallet and Shipment Information	30



## Product Specification

M190PTN01.0

AU Optronics Corporation

## **Records of Revision**

## 1 Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) In case if a Module has to be put back into the packing container slot after once it was taken out from the container, do not press the center of LED light bar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Pls avoid touching COF position while you are doing mechanical design
- 14) When storing modules as spares for a long time, the following precaution is necessary:  
Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.

## 2 General Description

This specification applies to the 19 inch- WXGA+ color a-Si TFT-LCD Module M190PTN01.0. The display supports the WXGA+ (1440(H) x 900(V)) screen format and 16.7M colors (RGB 6-bits+HiFRC). The light source of this TFT-LCD module is W-LED. All input signals are 2-channel LVDS interface and this module doesn't contain a driver for backlight.

### 2.1 Display Characteristics

The following items are characteristics summary on the table under 25°C condition:

Items	Unit	Specification
Screen Diagonal	[mm]	481.4(18.9")
Active Area	[mm]	408.24 (H) x 255.15(V)
Pixels H x V		1440x3(RGB) x 900
Pixel Pitch	[um]	283.5 (per one triad) x283.5
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		TN Mode, Normally White
White Luminance ( Center )	[cd/m <sup>2</sup> ]	250 cd/m <sup>2</sup> (Typ.)
Contrast Ratio		1000 (Typ.)
Optical Response Time	[msec]	5ms (Typ., on/off)
Nominal Input Voltage VDD	[Volt]	+5.0 V
Power Consumption (VDD line + LED line)	[Watt]	10.66 W (Typ.) VDD line : PDD (typ), All black pattern at 60Hz = 1.95W LED line : PBLU (typ) = 8.71W
Weight	[g]	1520 (Typ.)
Physical Size	[mm]	428.0(W) x 278.0(H) x 10.3(D) (Typ.)
Electrical Interface		Dual channel LVDS
Support Color		16.7M colors (RGB 6-bit + Hi_FRC )
Surface Treatment		Anti-Glare, 3H
Temperature Range Operating Storage (Shipping)	[°C]	0 to +50 -20 to +60
RoHS Compliance		RoHS Compliance
TCO Compliance		TCO6.0 Compliance



# Product Specification

M190PTN01.0

AU OPTRONICS CORPORATION


## 2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 °C:


Item	Unit	Conditions	Min.	Typ.	Max.	Note
Viewing Angle	[degree]	Horizontal (Right)	75	85	-	2
		CR = 10 (Left)	75	85	-	
		Vertical (Up)	70	80	-	
		CR = 10 (Down)	70	80	-	
Contrast Ratio		Normal Direction	600	1000	-	3
Response Time	[msec]	Rising Time (TrR)	-	3.6	5.7	4
		Falling Time (TrF)	-	1.4	2.3	
		Rising + Falling	-	5	8	
Color / Chromaticity Coordinates (CIE)		Red x	0.615	0.645	0.675	5
		Red y	0.314	0.344	0.374	
		Green x	0.292	0.322	0.352	
		Green y	0.604	0.634	0.664	
		Blue x	0.124	0.154	0.184	
		Blue y	0.02	0.05	0.08	
Color Coordinates (CIE) White		White x	0.283	0.313	0.343	6
		White y	0.299	0.329	0.359	
Central Luminance	[cd/m <sup>2</sup> ]		200	250	-	6
Luminance Uniformity	[%]		75	80	-	7
Crosstalk (in 60Hz)	[%]				1.5	8
Flicker	dB				-20	9

**Note 1: Measurement Method**

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring (at surface 35 °C). In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

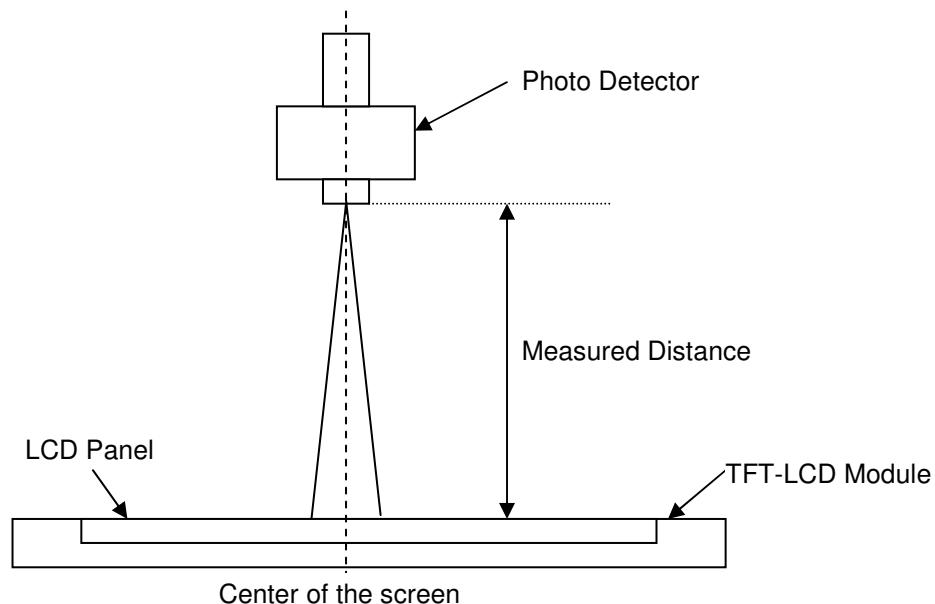**Note 2: Definition of Viewing Angle measured by ELDIM (EZContrast 88)**


Viewing angle is the measurement of contrast ratio  $\geq 10$ , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° ( $\theta$ ) horizontal left and right and 90° ( $\phi$ ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

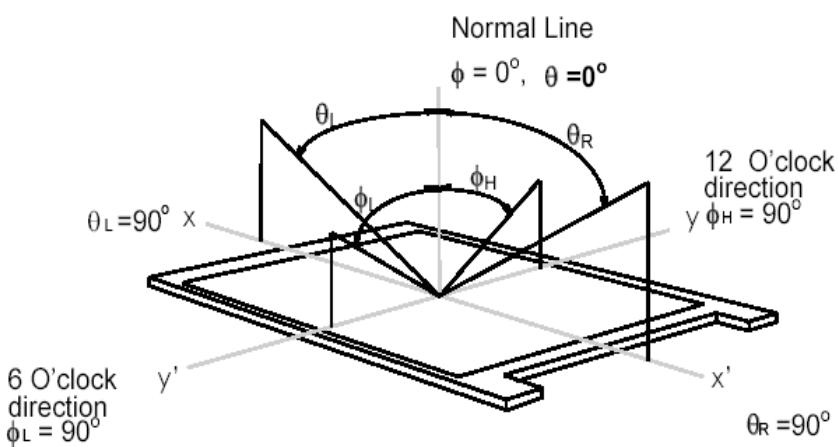

**Note 3: Contrast Ratio** measured by TOPCON SR-3

**Note 4: Definition of Response time** measured by Westar TRD-100A

The output signals of photo detector are measured when the input signals are changed from "Full Black" to "Full White" (rising time,  $T_{rR}$ ), and from "Full White" to "Full Black" (falling time,  $T_{rF}$ ), respectively. The response time is interval between the 10% and 90% (1 frame at 60 Hz) of amplitudes.

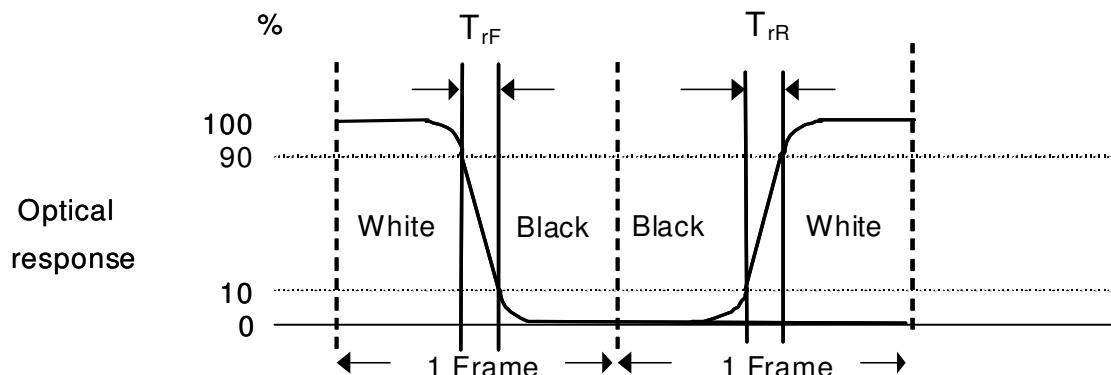


$$T_{rR} + T_{rF} = 5 \text{ msec (typ.)}$$

Algorithm:  $| \text{Gray Level A} - \text{Gray Level B} | \geq 16$ , then the average gray to gray response time is 2 ms,  
( $F = 60 \text{ Hz}$ ).

**Note 5: Color Chromaticity and Coordinates (CIE)** measured by TOPCON SR-3

**Note 6: Central Luminance** measured by TOPCON SR-3

**Note 7: Luminance Uniformity** of these 9 points defined as below and measured by TOPCON SR-3

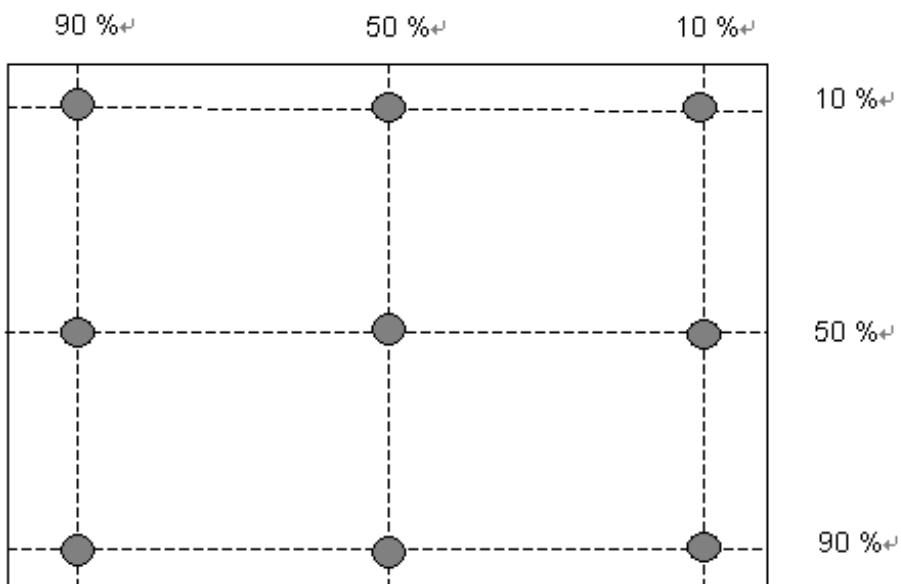

$$\text{Uniformity} = \frac{\text{Minimum Luminance in 9 points (1 - 9)}}{\text{Maximum Luminance in 9 Points (1 - 9)}}$$


**Note 8: Crosstalk** defined as below and measured by TOPCON SR-3

$$CT = | Y_B - Y_A | / Y_A \times 100 (\%)$$


Where

$Y_A$  = Luminance of measured location without gray level 0 pattern ( $\text{cd}/\text{m}^2$ )


$Y_B$  = Luminance of measured location with gray level 0 pattern ( $\text{cd}/\text{m}^2$ )

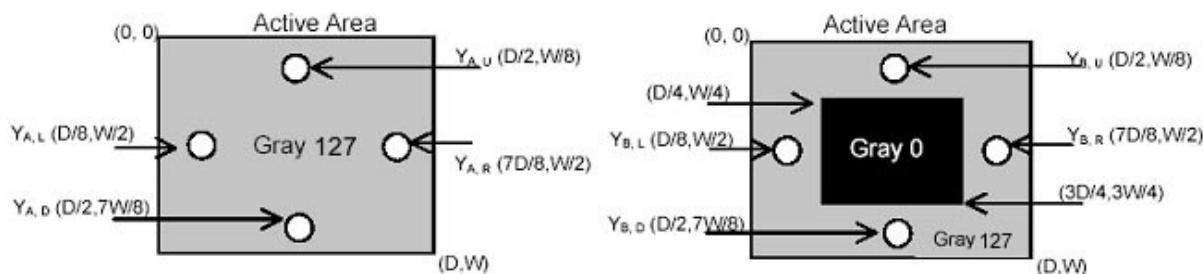

**Note 9: Test Pattern Sub-checker Pattern** measured by TOPCON SR-3

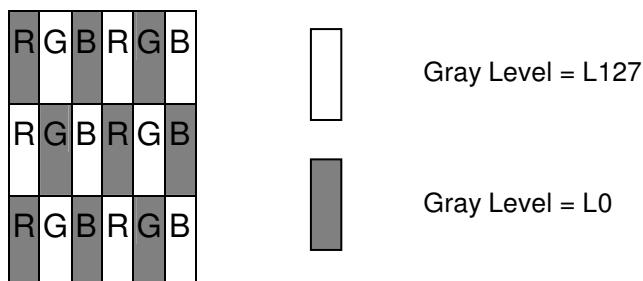


Method: Record dBV & DC value with TRD-100

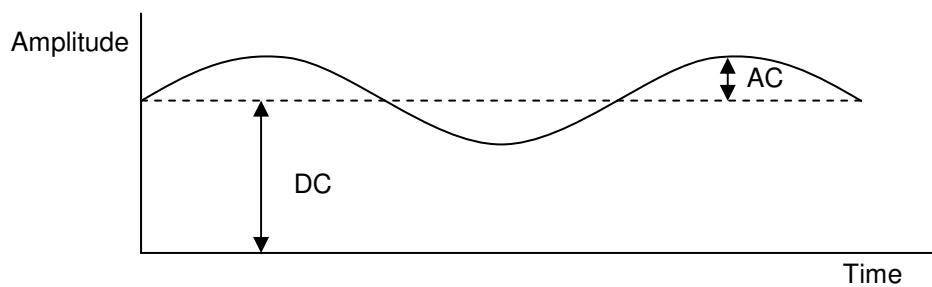

$$\text{Flicker (dB)} = 20 \log \frac{\text{AC Level(at 30 Hz)}}{\text{DC Level}}$$

### 3 Functional Block Diagram

The following diagram shows the functional block of the 19.0 inch Color TFT-LCD Module:

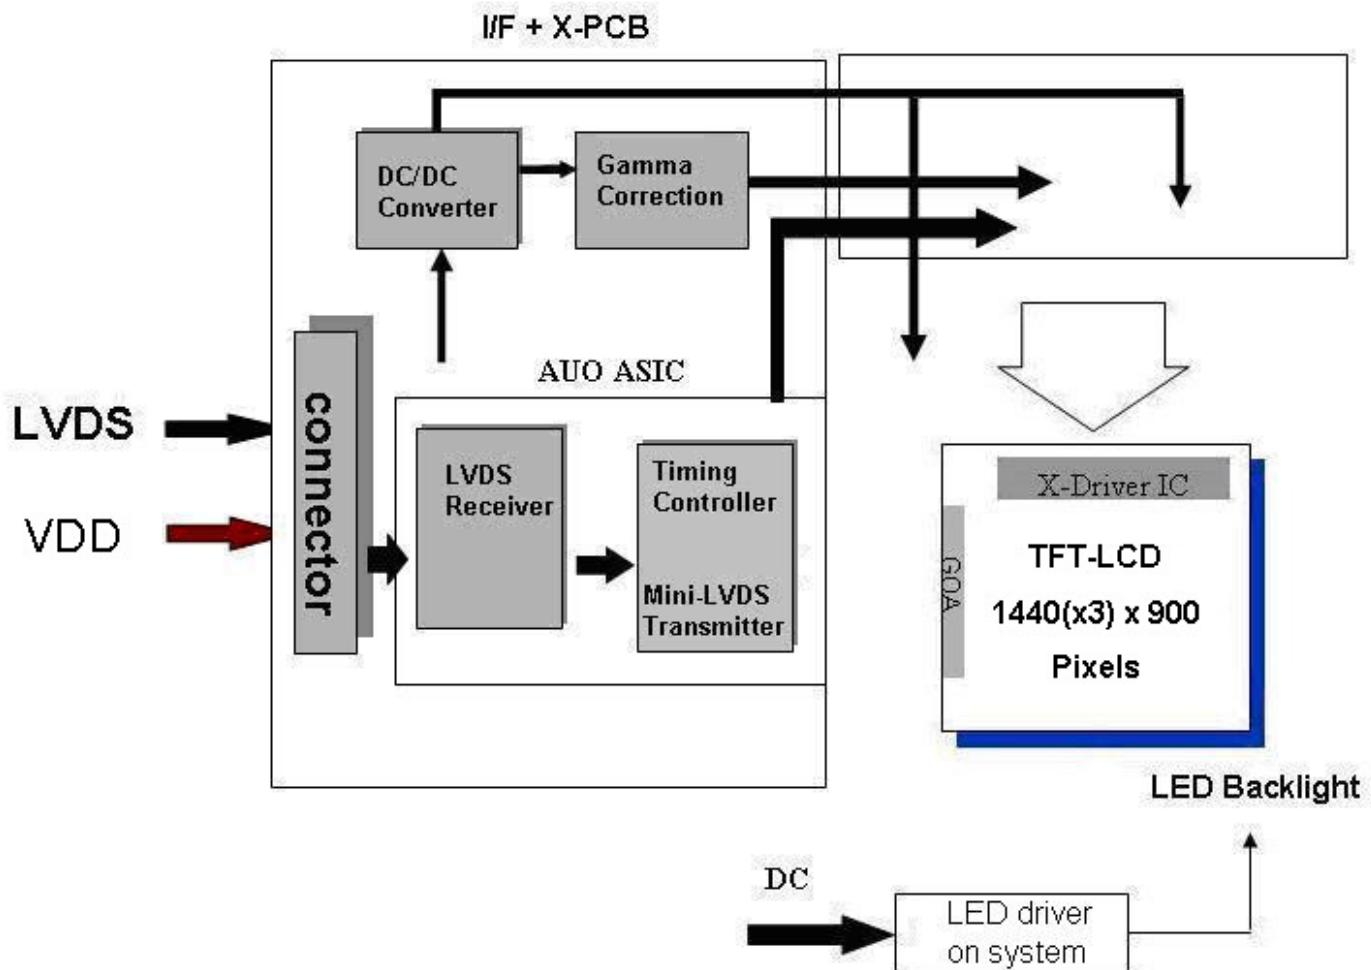



# Product Specification

M190PTN01.0

AU Optronics Corporation

## 4 Absolute Maximum Ratings

Absolute maximum ratings of the module are listed as follows:

### 4.1 TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive	VDD	-0.3	6.0	[Volt]	<b>Note 1, 2</b>

### 4.2 Backlight Unit

Item	Symbol	Min	Max	Unit	Conditions
LED Forward Current	IRLED1	0	90	[mA]	<b>Note 1,2,5</b> 100% duty
	IRLED2				
	IRLED3				
	IRLED4				
LED Pulse Forward Current	IPLED1	-	150	[mA]	<b>Note 1,2,5</b> 10% duty @100Hz
	IPLED2				
	IPLED3				
	IPLED4				
LED forward Voltage variation (per string variation)	$\Delta V_f$	-	2.2	[Volt]	<b>Note 1,2</b>

### 4.3 Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Conditions
Operating Temperature	TOP	0	+50	[°C]	<b>Note 3</b>
Glass Surface Temperature (Operation)	TGS	0	+65	[°C]	<b>Note3</b> <b>Note4</b>
Operation Humidity	HOP	5	90	[%RH]	<b>Note 3</b>
Storage Temperature	TST	-20	+60	[°C]	
Storage Humidity	HST	5	90	[%RH]	

**Note 1:** Within Ta (25 °C)

**Note 2:** Permanent damage to the device may occur if exceeding maximum values


**Note 3:** Temperature and relative humidity range are shown as the below figure.

1. 90% RH Max (Ta ≤ 39°C)
2. Max wet-bulb temperature at 39°C or less. (Ta ≤ 39°C)
3. No condensation

**Note 4:** Function Judged only

**Note 5:** IRLED1,2,3,4 and IPLED1,2,3,4 define as per strings LED current.

AU Optronics Corporation

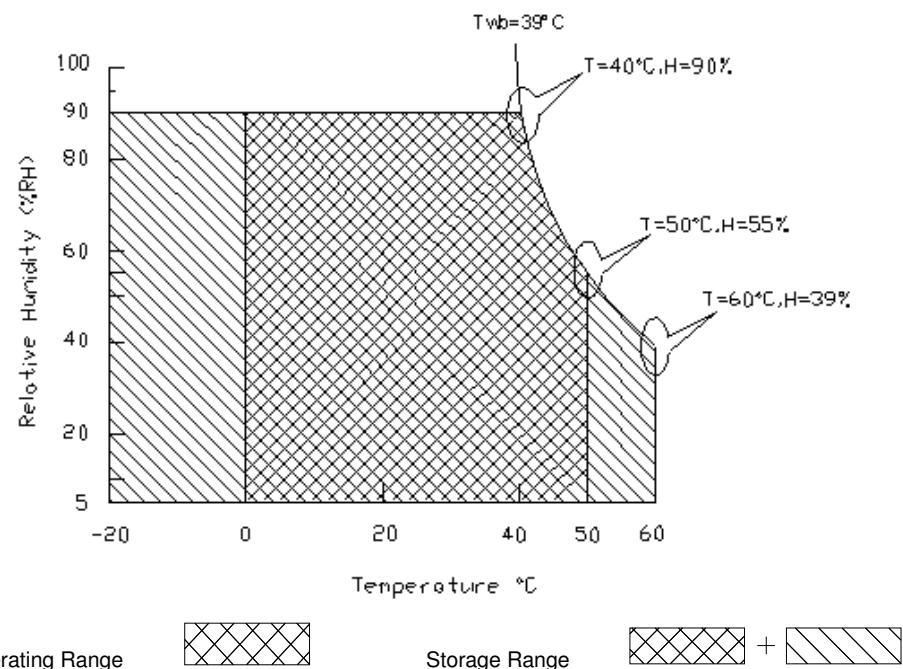

## 5 Electrical Characteristics

### 5.1 TFT LCD Module


#### 5.1.1 Power Specification

Input power specifications are listed as follows:

Symbol	Description	Min	Typ.	Max	Unit	Conditions
VDD	Logic/LCD Drive Voltage	4.5	5	5.5	[Volt]	+/-10%
IDD1	Input Current		0.39	0.51	[A]	VDD= 5.0V, All black Pattern at 60 Hz
			0.44	0.57	[A]	VDD= 5.0V, All black Pattern at 75 Hz
PDD1	VDD Power		1.95	2.55	[Watt]	VDD= 5.0V, All black Pattern at 60 Hz
			2.2	2.85	[Watt]	VDD= 5.0V, All black Pattern at 75 Hz
IRush	Inrush Current		1.4	3	[A]	<b>Note 1</b>
VDDRp	Allowable Logic/LCD Drive Ripple Voltage			500	[mV] p-p	VDD= 5.0V, All black Pattern at 75 Hz

#### Note 1: Measurement Conditions:

The duration of rising time of power input is 470 us.

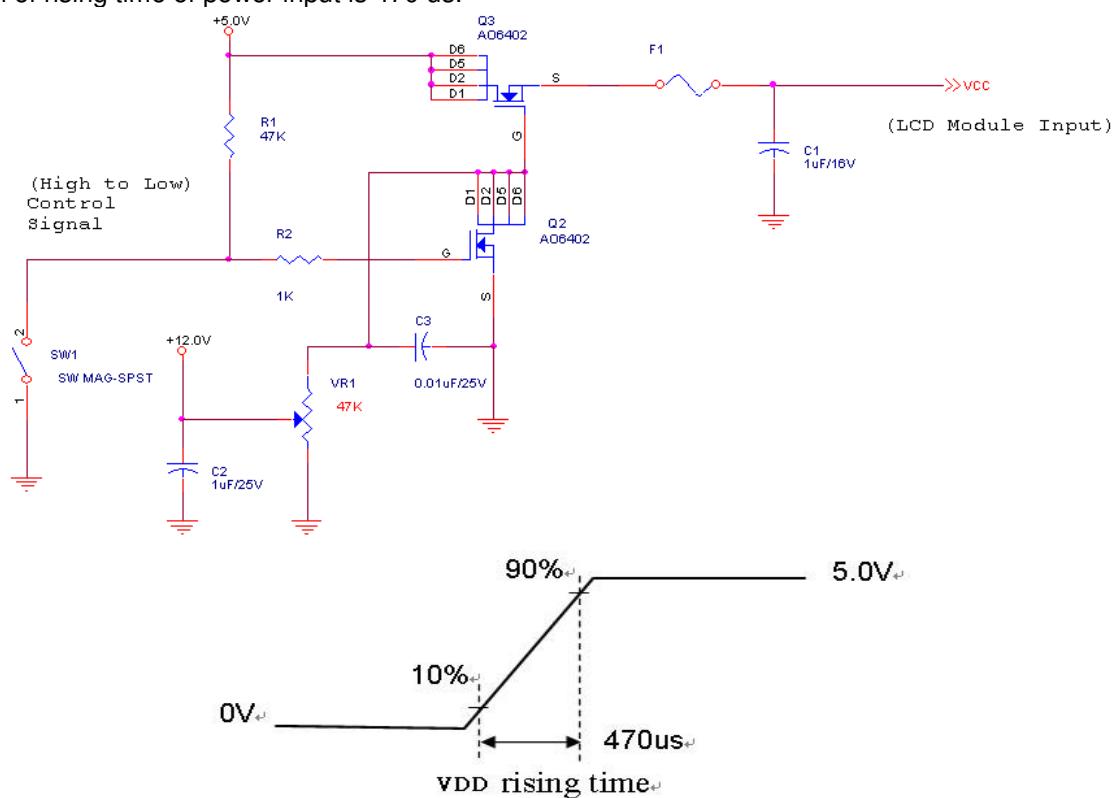


### 5.1.2 Signal Electrical Characteristics

(1) DC Characteristics of each signal are as following:


Symbol	Description	Min	Typ	Max	Units	Conditions
$V_{TH}$	Differential Input High Threshold	-	-	+100	[mV]	$V_{CM} = 1.2V$ <b>Note 1</b>
$V_{TL}$	Differential Input Low Threshold	-100	-	-	[mV]	$V_{CM} = 1.2V$ <b>Note 1</b>
$ V_{ID} $	Input Differential Voltage	100	-	600	[mV]	<b>Note 1</b>
$V_{CM}$	Differential Input Common Mode Voltage	+1.0	+1.2	+1.5	[V]	$V_{TH}-V_{TL} = 200MV$ (max) <b>Note 1</b>

**Note 1:** LVDS Signal Waveform

#### Single-End

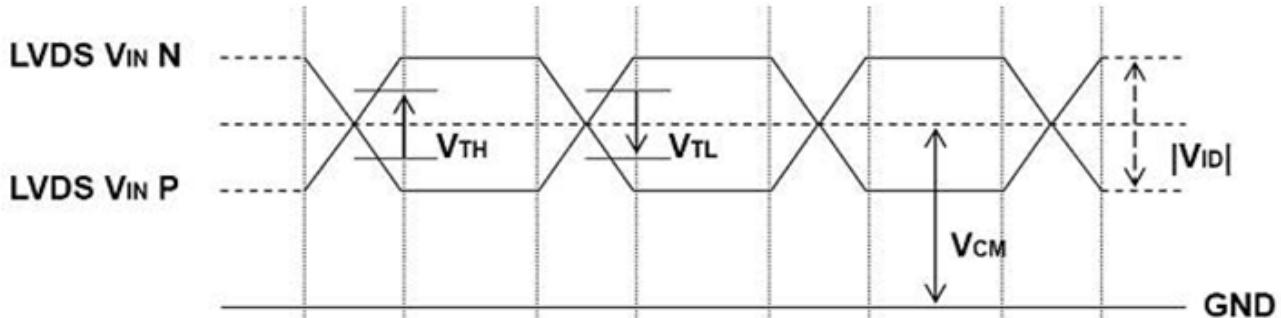


#### Differential Signal

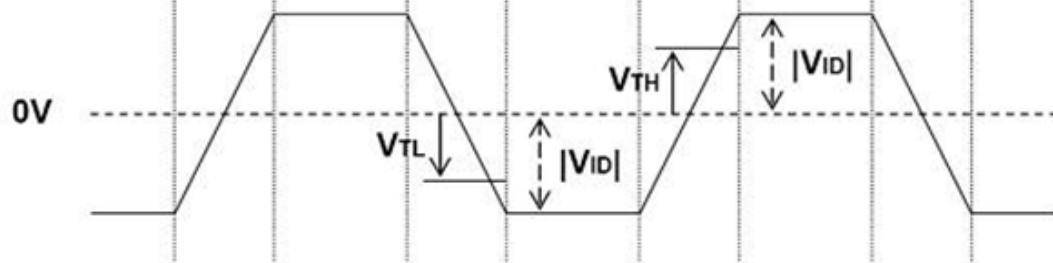

## (2) AC Characteristics

Symbol	Description	Min	Max	Units	Conditions
$F_{DEV}$	Maximum deviation of input clock frequency during SSC	-	$\pm 3$	%	
$F_{MOD}$	Maximum modulation frequency of input clock during SSC	-	200	KHz	

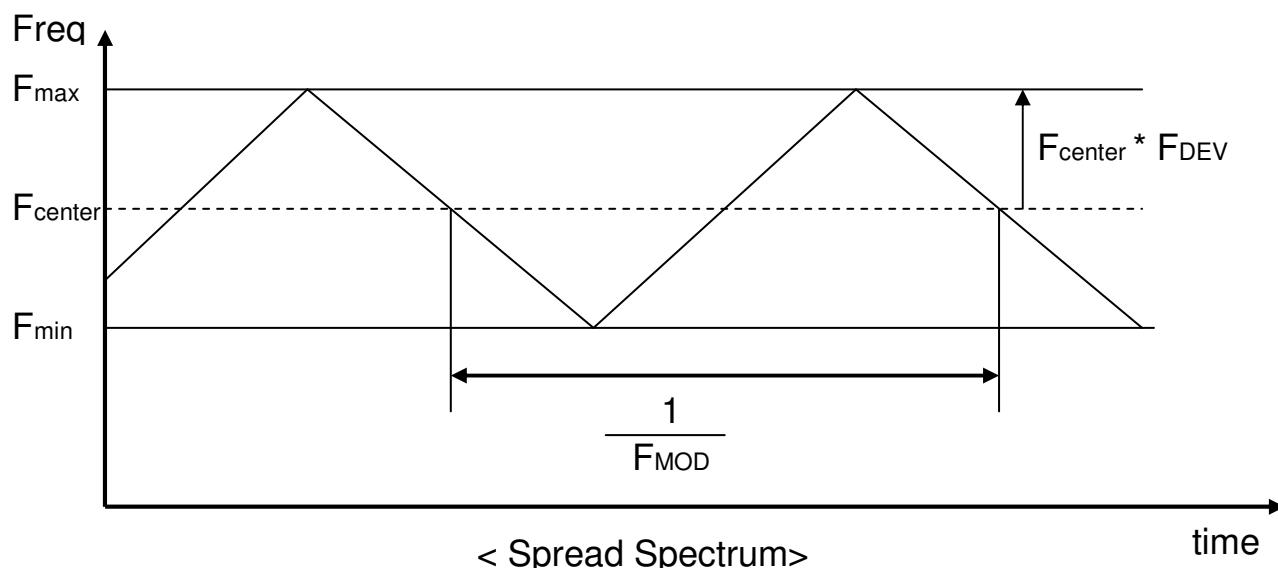

## 5.2 Backlight Unit

Parameter guideline for LED driving is under stable conditions at 25 °C (Room Temperature):

Symbol	Description	Min.	Typ.	Max.	Unit	Note
IRLED1	LED Forward Current	-	60	63	[mA]	<b>Note 1</b>
IRLED2						
IRLED3						
IRLED4						
VLB	Light Bar Operation Voltage (for reference)	30.8	36.3	39.6	[Volt]	<b>Note 2</b>
PBLU	BLU Power Consumption (for reference)	-	8.71	9.98	[Watt]	<b>Note 3</b>
LTLED	LED Life Time (Typical)	30,000	-	-	[Hour]	<b>Note 4</b>

Each module consists of 44 pcs LED ( 4 strings x 11 pcs / string )

**Note 1:** The specified current is 100% duty of LED chip input current, IRLED1,2,3,4 define as per strings LED current.

**Note 2:** The value showed is one string operation voltage.


**Note 3:** PBLU = VLED \* ( IRLED1+IRLED2+IRLED3+IRLED4)

**Note 4:** Definition of life time: Brightness becomes to 50% of its original value. The minimum life time of LED unit is on the condition of IRLED = 60mA and 25±2 °C (Room Temperature).


## 6 Signal Characteristics

### 6.1 Pixel Format Definition

Following figure shows the relationship between the input signals and LCD pixel format.

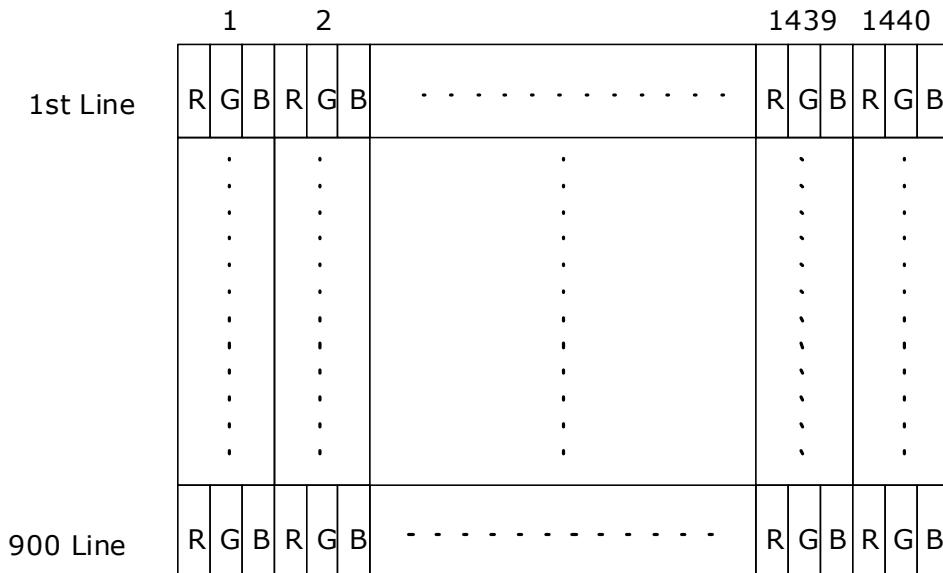

### 6.2 Input Data Format Definition

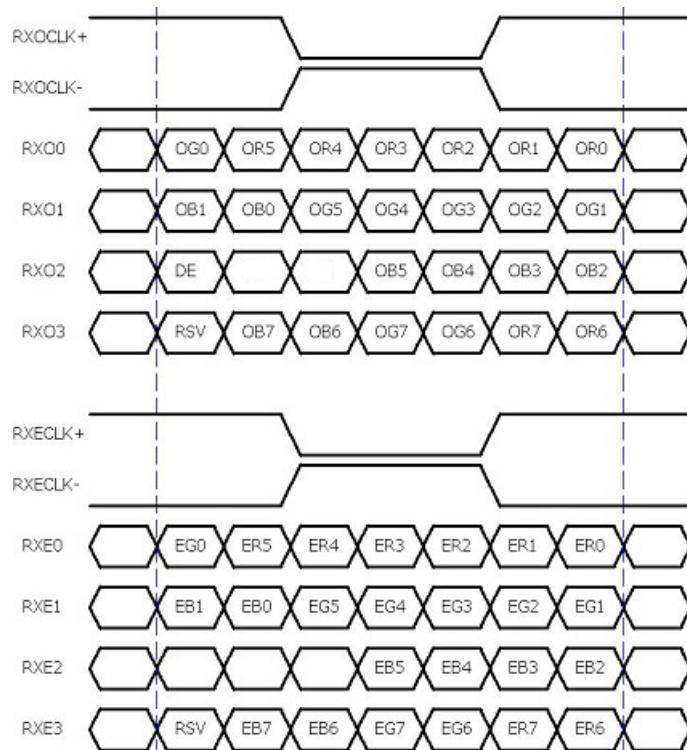


**Note 1:** R/G/B data 7:MSB, R/G/B data 0:LSB      O = "Odd Pixel Data"      E = "Even Pixel Data"

### 6.3 Signal Description

PIN #	SIGNAL NAME	DESCRIPTION
1	RxO0-	Negative LVDS differential data input (Odd data)
2	RxO0+	Positive LVDS differential data input (Odd data)
3	RxO1-	Negative LVDS differential data input (Odd data)
4	RxO1+	Positive LVDS differential data input (Odd data)
5	RxO2-	Negative LVDS differential data input (Odd data)
6	RxO2+	Positive LVDS differential data input (Odd data)
7	GND	Power Ground
8	RxOCLK-	Negative LVDS differential clock input (Odd clock)
9	RxOCLK+	Positive LVDS differential clock input (Odd clock)
10	RxO3-	Negative LVDS differential data input (Odd data)
11	RxO3+	Positive LVDS differential data input (Odd data)
12	RxE0-	Negative LVDS differential data input (Even data)
13	RxE0+	Positive LVDS differential data input (Even data)
14	GND	Power Ground
15	RxE1-	Negative LVDS differential data input (Even data)
16	RxE1+	Positive LVDS differential data input (Even data)
17	GND	Power Ground
18	RxE2-	Negative LVDS differential data input (Even data)
19	RxE2+	Positive LVDS differential data input (Even data)
20	RxECLK-	Negative LVDS differential clock input (Even clock)
21	RxECLK+	Positive LVDS differential clock input (Even clock)
22	RxE3-	Negative LVDS differential data input (Even data)
23	RxE3+	Positive LVDS differential data input (Even data)
24	GND	Power Ground
25	NC	No connection (for AUO test only. Do not connect)
26	NC	No connection (for AUO test only. Do not connect)
27	NC	No connection (for AUO test only. Do not connect)
28	VDD	Power +5V
29	VDD	Power +5V
30	VDD	Power +5V

**Note 1:** Input signals of odd and even clock shall be the same timing.

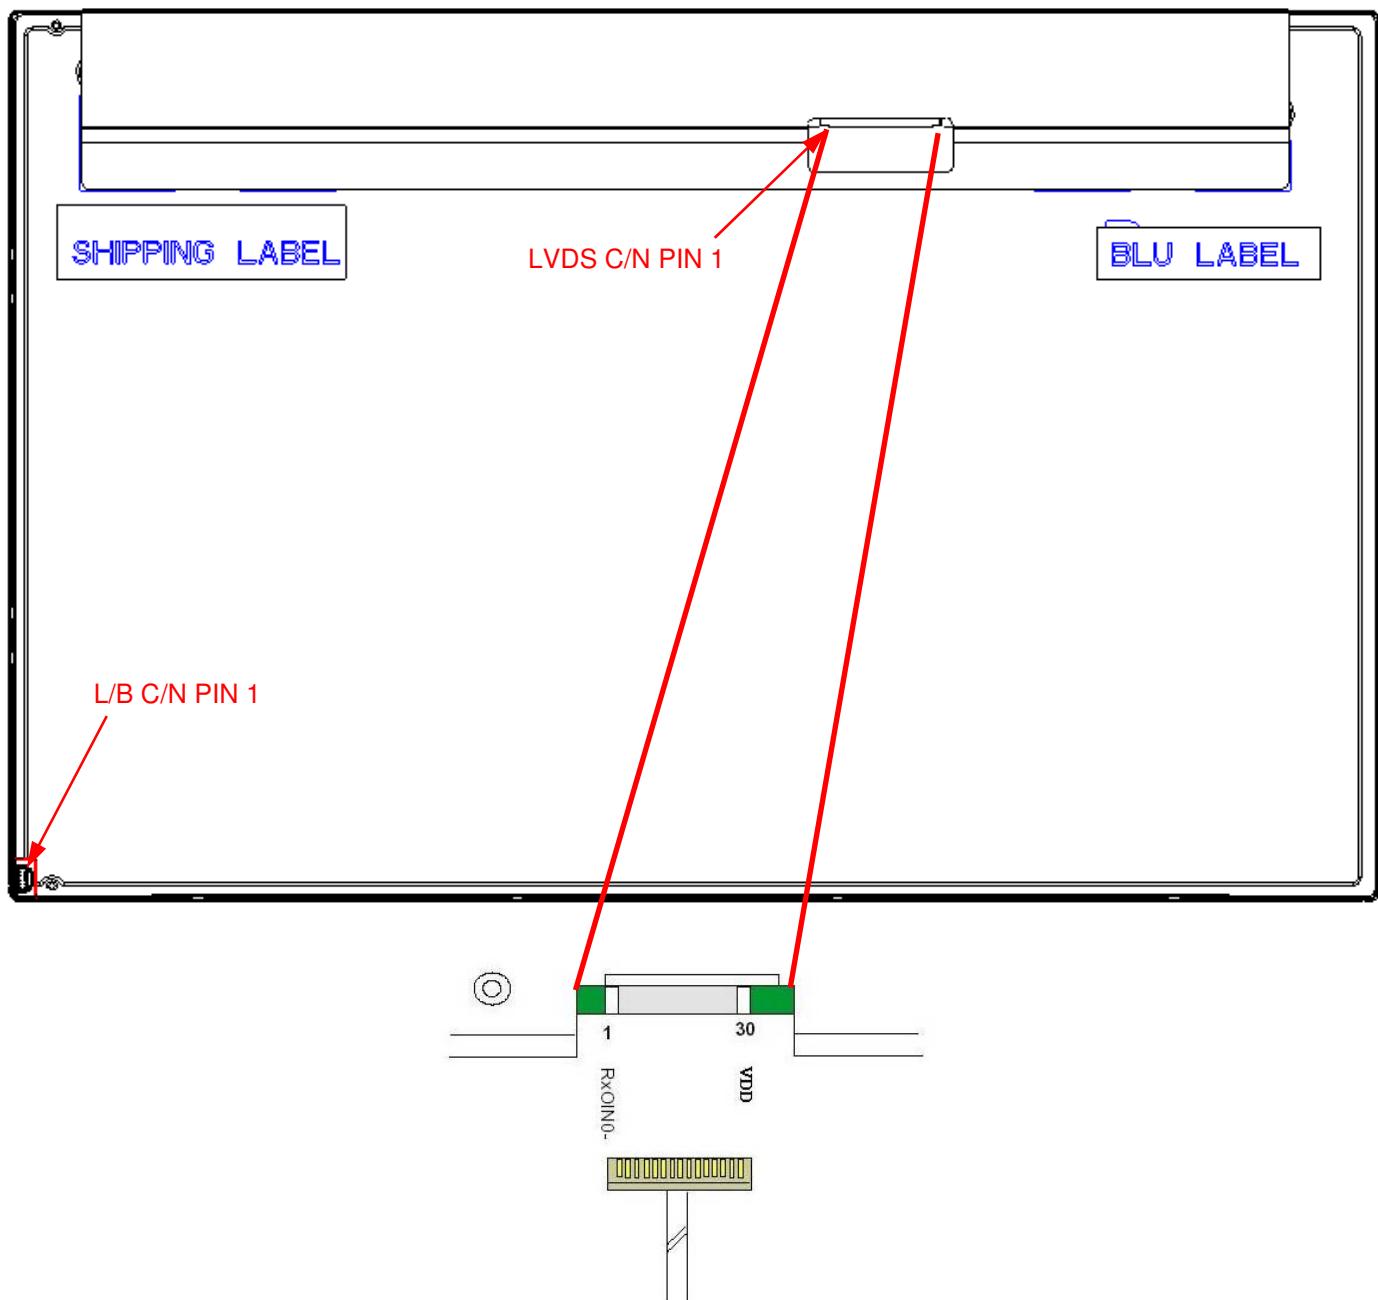


## 6.4 Timing Characteristics

The input signal timing specifications are shown as the following table

Signal	Item	Symbol	Min	Typ	Max	Unit
Vertical Section	Period	Tv	912	916	1651	Th
	Active	Tdisp(v)	900	900	900	Th
	Blanking	Tbp(v)+Tfp(v)+PWvs	12	16	751	Th
Horizontal Section	Period	Th	813	964	1472	Tclk
	Active	Tdisp(h)	720	720	720	Tclk
	Blanking	Tbp(h)+Tfp(h)+PWhs	93	244	752	Tclk
Clock	Period	Tclk	14.9	18.9	27.0	Ns
	Frequency	Freq	37.1	53.0	67.1	MHz
Frame rate	Frame rate	VFreq	50	60	76	Hz
Hsync Frequency	Hsync Frequency	HFreq	45.6	55.0	82.5	KHz


**Note 1:** DE mode only

## 6.5 Timing Diagram

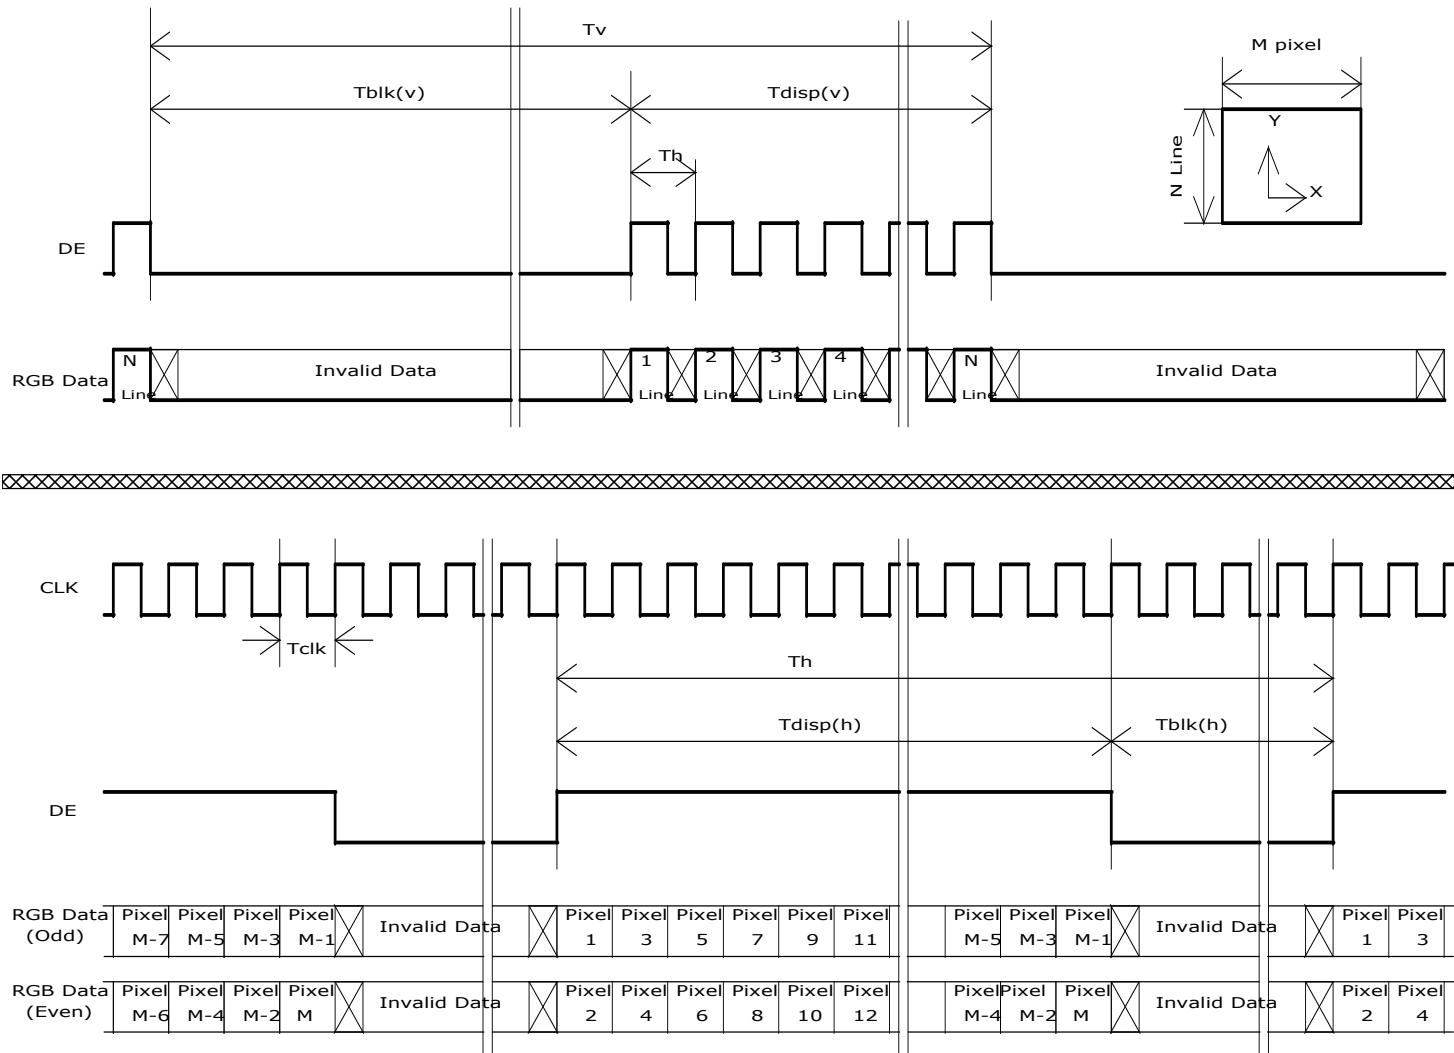

## 6.6 Power ON/OFF Sequence

VDD power and lamp on/off sequence are as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state when VDD is off.

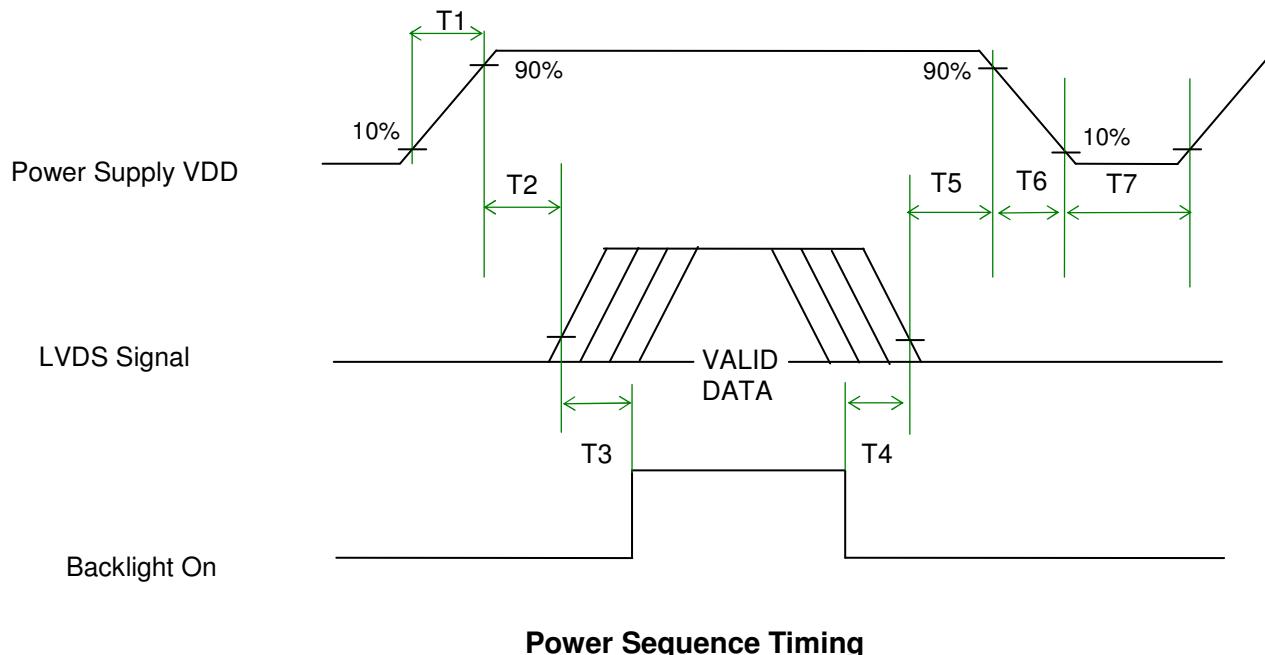

**Power Sequence Timing**

Parameter	Value			Unit
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	0	-	50	[ms]
T3	500	-	-	[ms]
T4	100	-	-	[ms]
T5	0	-	50	[ms] Note1,2
T6	0	-	100	[ms] Note1,2
T7	1000	-	-	[ms]

**Note1** : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off.

**Note2** : During T5 and T6 period , please keep the level of input LVDS signals with Hi-Z state.



# Product Specification

M190PTN01.0

AU OPTRONICS CORPORATION

## 7 Connector and Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

### 7.1 TFT LCD Module

Connector Name / Designation	Interface Connector / Interface Card
Manufacturer	STM P-TWO
Type Part Number	MSCKT2407P30HB AL230F-A0G1D-P
Mating Housing Part Number	FI-X30HL (Locked Type)

#### 7.1.1 Pin Assignment

Pin#	Signal Name	Pin#	Signal Name
1	RxO0-	2	RxO0+
3	RxO1-	4	RxO1+
5	RxO2-	6	RxO2+
7	GND	8	RxOCLKIN-
9	RxOCLKIN+	10	RxO3-
11	RxO3+	12	RxE0-
13	RxE0+	14	GND
15	RxE1-	16	RxE1+
17	GND	18	RxE2-
19	RxE2+	20	RxECLKIN-
21	RxECLKIN+	22	RxE3-
23	RxE3+	24	GND
25	NC (for AUO test only. Do not connect)	26	NC (for AUO test only. Do not connect)
27	NC (for AUO test only. Do not connect)	28	VDD
29	VDD	30	VDD


## 7.2 LED Connector on Backlight Unit

This connector is mounted on LED light bar.

Connector Name / Designation	Light Bar Connector
Manufacturer	ENTERY INDUSTRIAL CO., LTD.
Type Part Number	3707K-S06N-21 (BLACK) (Locking Type, Wire Harness)



### 7.2.1 LED Pin assignment

Pin#	Signal Name
1	IRLED1 (current out)
2	IRLED2 (current out)
3	VLED (voltage in)
4	VLED (voltage in)
5	IRLED3 (current out)
6	IRLED4 (current out)


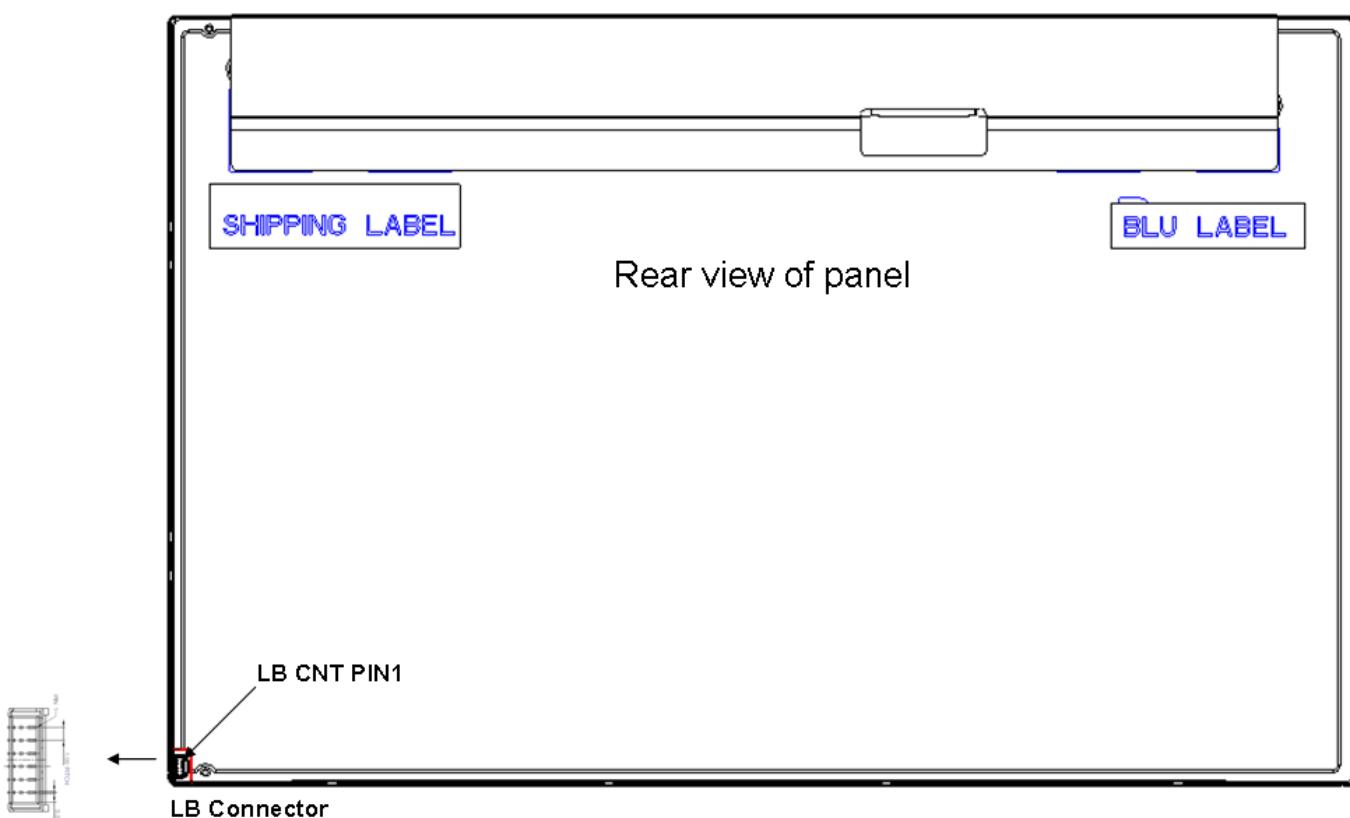


### 7.2.2 LED Connector Dimension

$H \times V \times D = 13.9 \times 3.00 \times 4.25$ , Pitch = 1.0 (unit = mm)

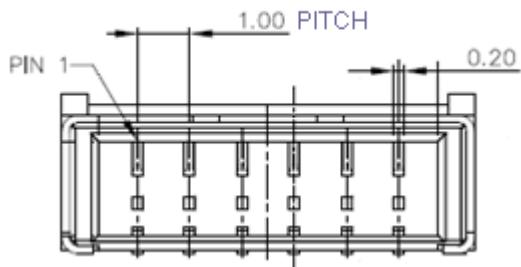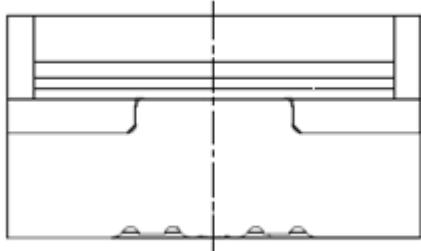

### 7.2.3 LED Mating housing dimension

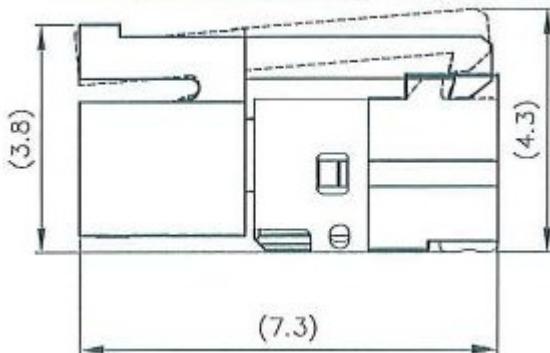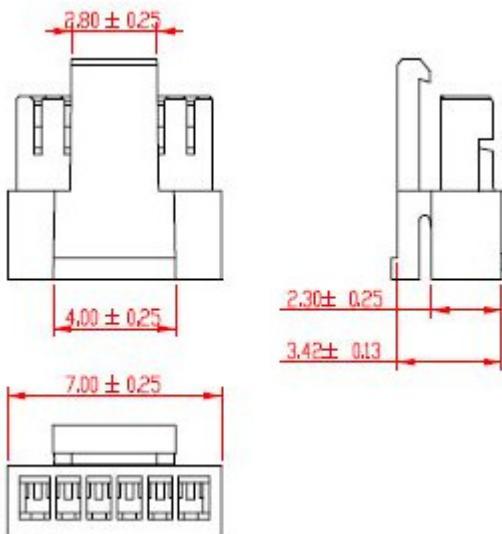

## 8 Reliability Test

Environment test conditions are listed as following table.

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50 °C, 80%RH, 300 hours	
High Temperature Operation (HTO)	Ta= 50 °C, 50%RH, 300 hours	
Low Temperature Operation (LTO)	Ta= 0 °C, 300 hours	
High Temperature Storage (HTS)	Ta= 60 °C, 300 hours	
Low Temperature Storage (LTS)	Ta= -20 °C, 300 hours	
Vibration Test (Non-operation)	Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Duration: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 45.7 cm, package test	
Thermal Shock Test (TST)	-20 °C/30min, 60 °C/30min, 100 cycles	<b>Note 1</b>
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electro Static Discharge)	Contact Discharge: ± 8KV, 150pF(330Ω ) 1sec, 15 points, 25 times/ point	<b>Note 2</b>
	Air Discharge: ± 15KV, 150pF(330Ω ) 1sec 15 points, 25 times/ point	
Altitude Test	Operation: 18,000 ft Non-Operation: 40,000 ft	


**Note 1:** The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change. A cycle of rapid temperature change consists of varying the temperature from -20 °C to 60 °C, and back again. Power is not applied during the test. After temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

**Note 2:** EN61000-4-2, ESD class B: Certain performance degradation allowed:

- No data lost
- Self-recoverable
- No hardware failures

## 9 Shipping Label

The label on the panel is shown as below:

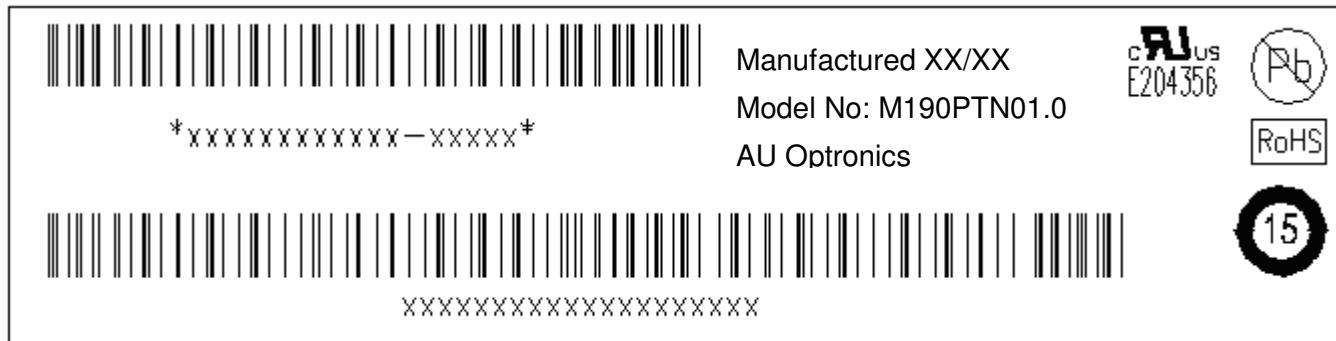


**Note 1:** For Pb Free products, AUO will add for identification.

**Note 2:** For RoHS compatible products, AUO will add for identification.

**Note 3:** For China RoHS compatible products, AUO will add for identification.



**Note 4:** The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

## **10 Mechanical Characteristics**

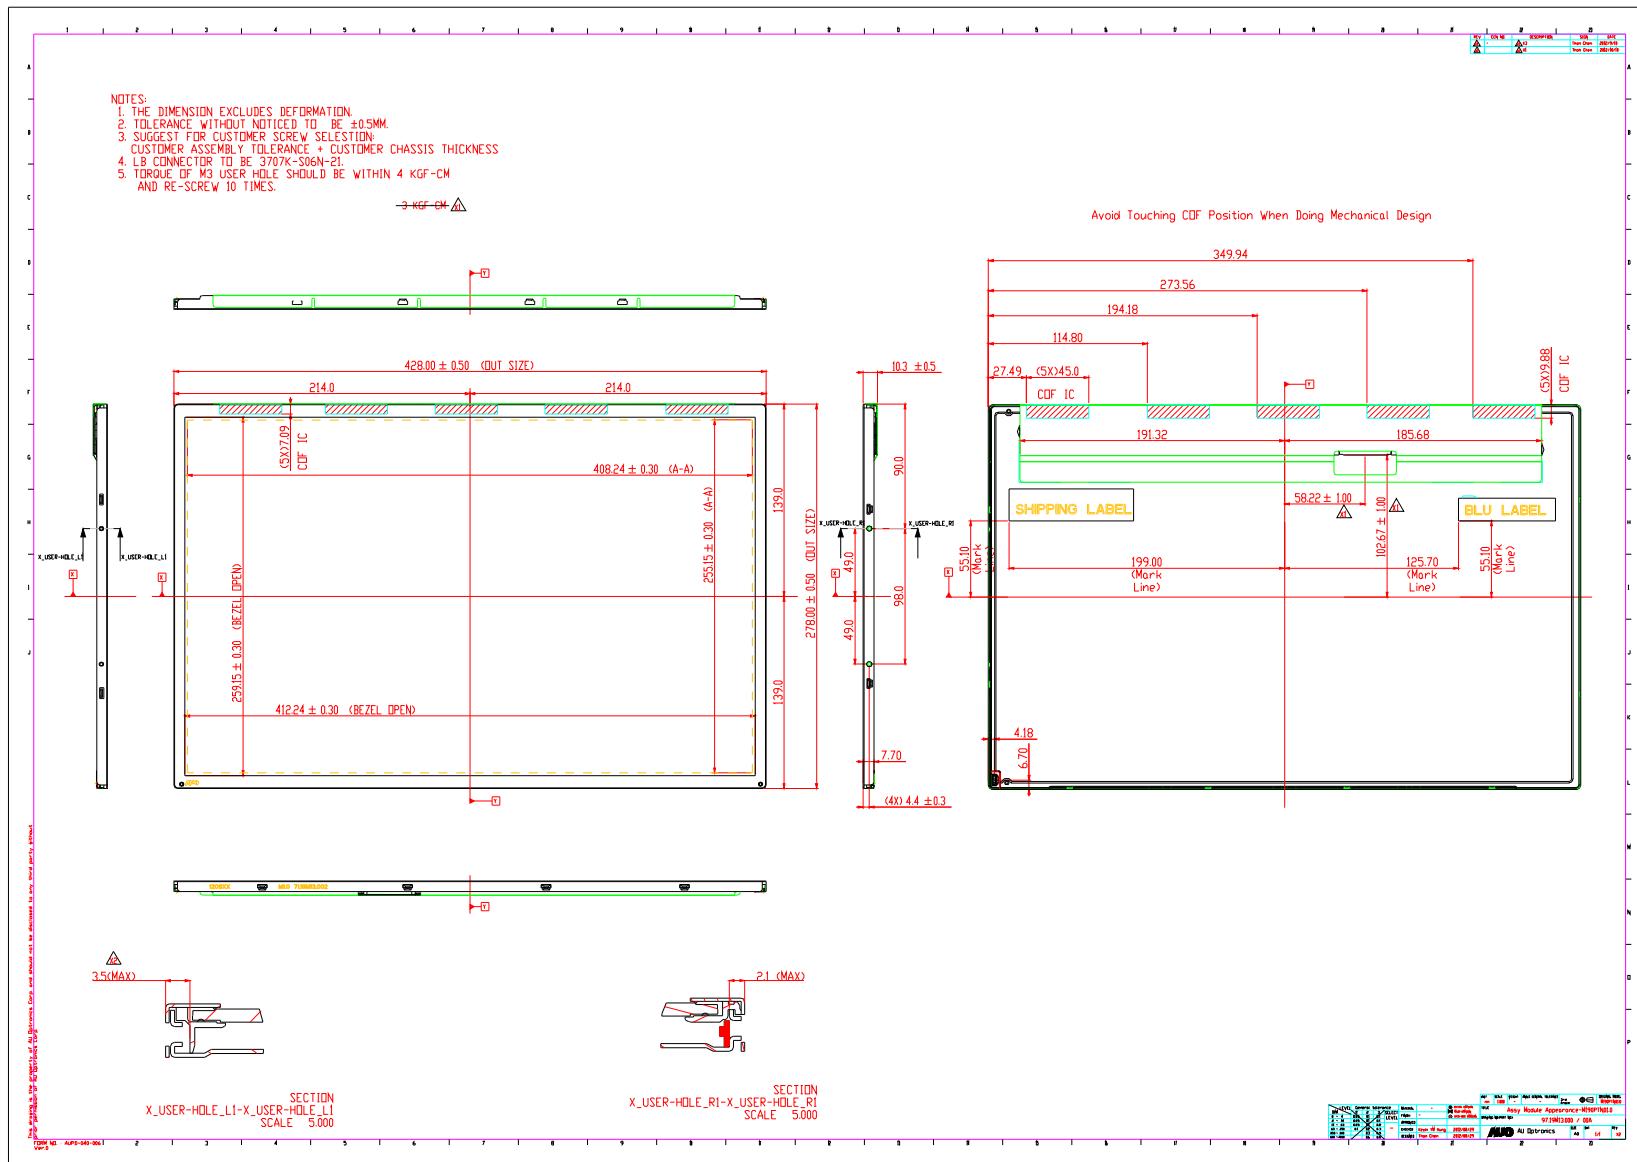

## 11 Packing Specification

### 11.1 Packing Flow

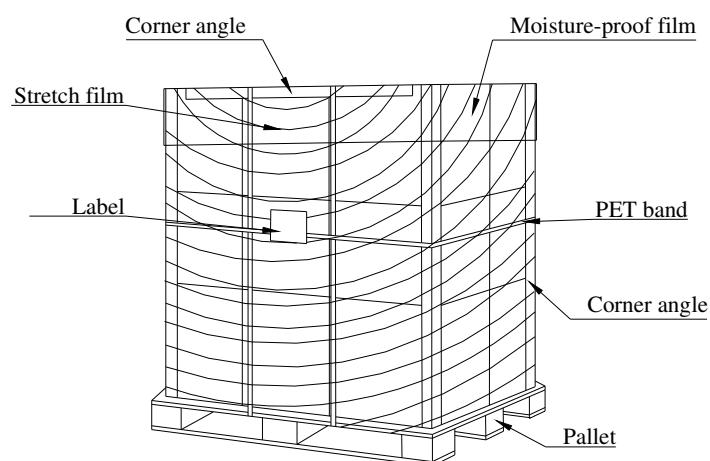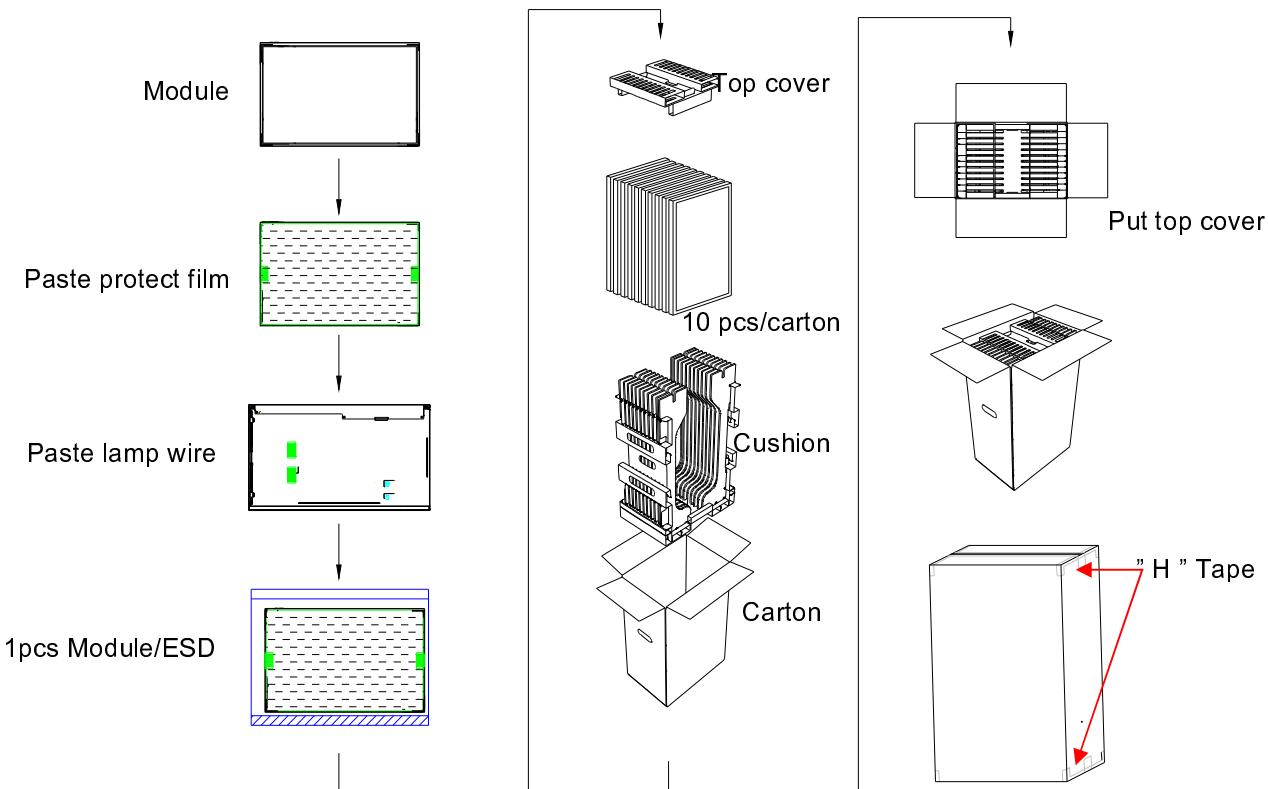



# Product Specification

M190PTN01.0

AU Optronics Corporation

## 11.2 Pallet and Shipment Information

	Item	Specification			Remark
		Q'ty	Dimension	Weight(kg)	
1	Panel	1	428(H)mm x 278(V)mm x 10.3(D)mm	1.52	<b>Note 1</b>
2	Cushion	1	-	1.9	
3	Box	1	480(L)mm x 276(W)mm x 430(H)mm	1.1	without Panel & cushion <b>Note 1</b>
4	Packing Box	10 pcs/Box	524(L)mm x 282(W)mm x 356(H)mm	18.2	with panel & cushion <b>Note 1</b>
5	Pallet	1	1150(L)mm x 1070(W)mm x 138(H)mm	13	<b>Note 1</b>
6	Pallet after Packing	24 boxes/pallet	1150(L)mm x 1070(W)mm x 1208(H)mm	448.8	<b>Note 1</b>

**Note 1:** Estimated value which is subject to change based on real measured data.