


## Double-Balanced Mixer

**M1G  
V2**

### Features

- LO and RF: 1.0 to 4.2 GHz
- IF: DC to 1 GHz
- LO Drive +7 dBm (nominal)
- High Isolation 40 dB (Typ.)

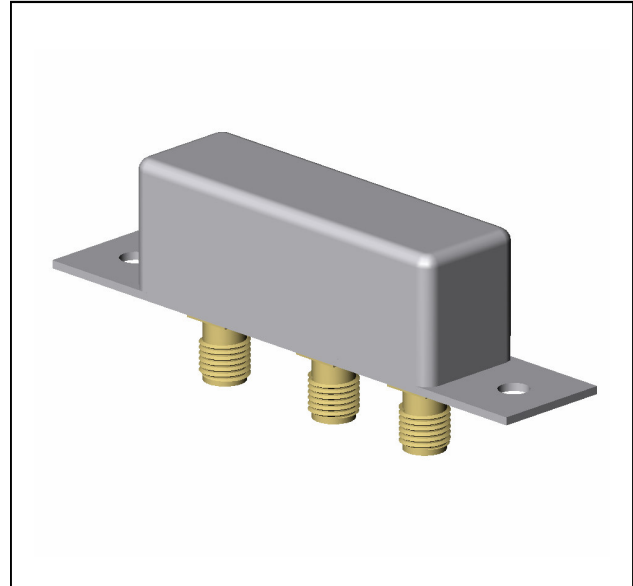

### Guaranteed Specifications<sup>1</sup>

Characteristics	Min	Typ.	Max.	Test Conditions
SSB Conversion Loss And SSB Noise Figure		6.5 dB 7.5 dB	8.5 dB 9.0 dB	fL & fR 1.5 to 4.2 GHz fI 0.01 to 1 GHz fL & fR 1.0 to 1.5 GHz fI 10 to 500 MHz
Isolation fL at R fL at I	30 dB 20 dB	40 dB 30 dB		fL 1.0 to 4.2 GHz

Notes:

1. Measure in a 50-Ohm system with nominal LO drive and downconverter application only, unless otherwise specified. The I-Port frequency range extends to DC for phase detection, pulse modulation, or attenuator applications, I-Port VSWR degrades from a 50-Ohm system at low IF frequencies.

### Absolute Maximum Ratings

Storage Temperature	-65°C to +100°C
Operating Temperature	-54°C to +100°C
Peak RF Input Power	+17 dBm
Peak Input Current at 25°C	50 mA DC


Weight 31 gram (1.1 oz) max.

**Double-Balanced Mixer**



**M1G  
V2**

**Typical Performance Curves at 25°C**

**Conversion Loss**

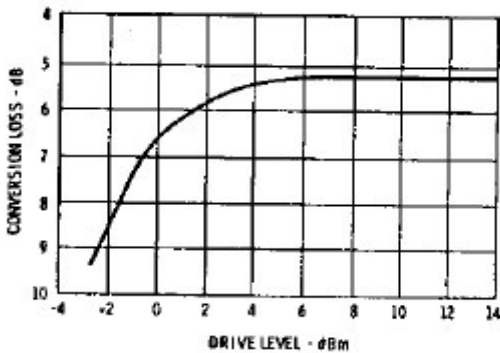


**Conversion Loss vs. LO Drive Level:** The minimum recommended drive level is +4 dBm. The maximum recommended drive level is +13 dBm.

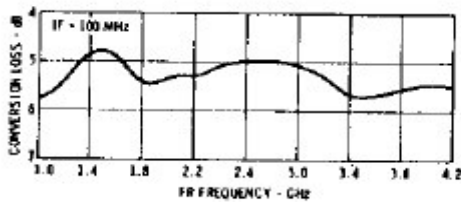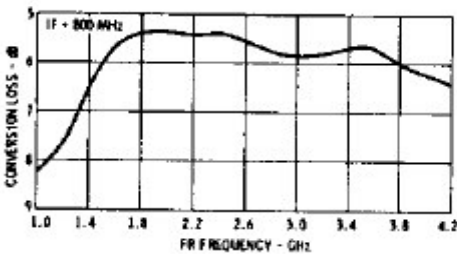


**Conversion Loss vs. Input Frequency:** Conversion loss of the mixer when used in an SSB system. The frequency ordinate refers to the R-port ( $f_R$ ) with  $f_L$  at 100 MHz and 800 MHz. Data plotted with an  $f_L$  level of +7 dBm.

**VSWR**

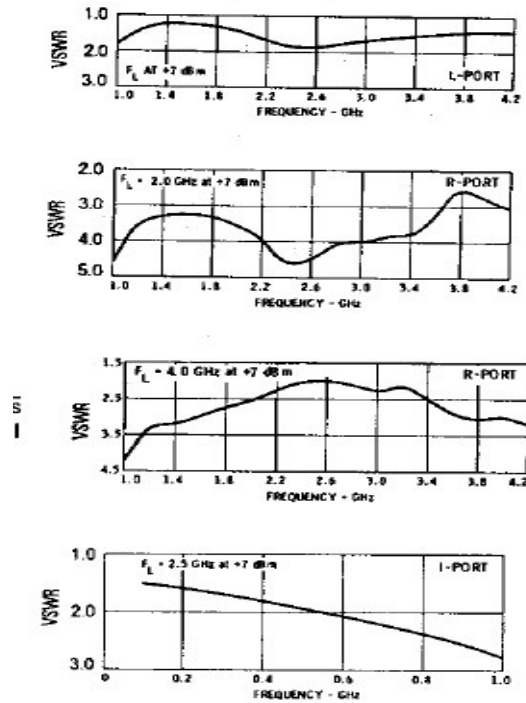

**VSWR vs. Frequency:** VSWR of the I- and R-ports in a 50-ohm system. Some variation in the R-port VSWR will occur as a function of the L-port frequency as shown above. Curves for R-port VSWR are plotted for L-port frequencies of 2 GHz and 4 GHz. For the best R-port VSWR, the  $f_L$  frequency should be greater than the input frequency at the R-port. A plot of I-port VSWR is also shown with  $f_R$  at 2 GHz and  $f_L$  greater than  $f_R$ .

**Isolation**

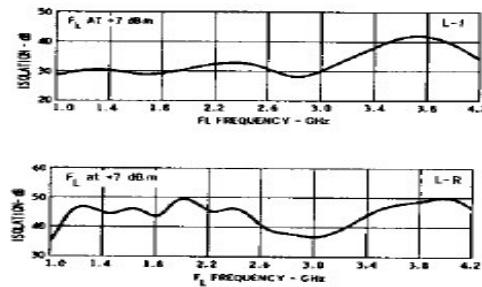

**Isolation vs. Frequency:** Level of the  $f_L$  signal fed through to the R- and I-ports with respect to the level of the  $f_L$  signal at the L-port.

Outline Drawing: M1G

