


Outline



UNIT: mm

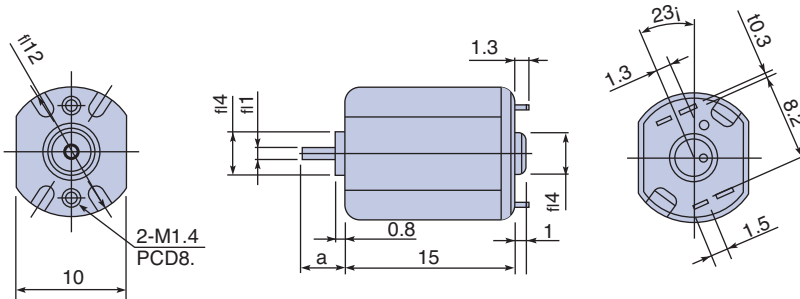

DC

Specifications

Model	Operating Voltage (V)	Rated Voltage (V)	No Load Speed (r/min)	No Load Current (mA)	Rated Load		Rated Load Speed (r/min)	Rated Current (mA)	Starting Torque		Shaft Length (mm)
					(gf·cm)	(mN·m)			(gf·cm)	(mN·m)	
M1N6FB08C	1.5 to 6.0	3	8460	20	2	0.196	5980	84	6.83	0.669	a= 6.6
M1N6FB10B	1.0 to 3.0	3	13030	45	2	0.196	10670	141	11.1	1.088	a= 4.6
M1N6FB75B	1.5 to 6.0	5	13760	24	2	0.196	11070	83	10.2	1.000	a= 4.6
M1N6GB105E	1.5 to 6.0	5	18200	42	3	0.296	15600	160	21.1	2.068	a= 9.6

Characteristics

