DC Mini-Motors M20N-8 Series

APPLICATIONS


Label Printer

SPECIFICATIONS


Items	Specifications
Rated Voltage	20.5V
Voltage Range	10.0~24.0V
Rated Load	$1.47 \text{mN} \cdot \text{m}$
No Load Speed	13,300rpm
No Load Current	70mA or less
Starting Torque	$6.57 \mathrm{mN} \cdot \mathrm{m}$
Rotation	CW/CCW

*Characteristics and the shaft length can be customized.

CHARACTERISTICS

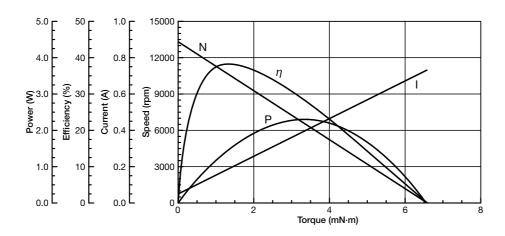

DIMENSIONS

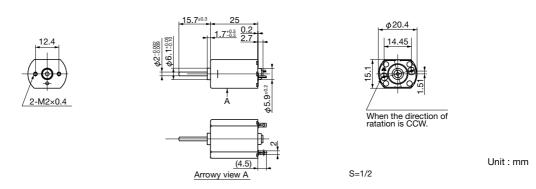

Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.
The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.

DC Mini-Motors

.e