



PHONE: (434) 295-3101  
 FAX: (434) 977-1849

# M43VVTT

## MINIATURE CRYSTAL OVEN SPECIFICATION

This specification defines the operating characteristics of a component heater. Long term reliability and stability are assured through use of premium components.

| REV | DESCRIPTION OF REVISION               | BY  | APV | DATE       |
|-----|---------------------------------------|-----|-----|------------|
| -   | Redrawn on new form was dwg. 115-036. | BTG | TST | 02-16-2004 |

This M43VVTT specification covers input voltages from +5 VDC to +28 VDC and set point temperatures from +35°C to +95°C. The VV in the part number specifies the nominal operating voltage. If the voltage is less than +10 VDC, use a leading zero (i.e. for +5 VDC use VV = 05). The TT in the part number specifies the set point temperature in °C (i.e. for +75°C use TT = 75). VV and TT are used in this specification to describe the operation of this oven.

1. TEMPERATURE
  - 1.1. Set point +TT °C (Customer specified)  
(+35°C to +95°C)
  - 1.2. Initial tolerance < ±3°C @ +25°C
2. STABILITY
  - 2.1. Ambient < ±3°C from -30°C to (TT-10)°C
  - 2.2. Voltage < ±0.5°C/±10% change
  - 2.3. Warm-up < ±1°C in 2 minutes @ +25°C  
(referenced to temperature  
at 15 minutes)
3. INPUT POWER
  - 3.1. Voltage +VV VDC (Customer specified)  
(+5 VDC to +28 VDC)
  - 3.2. Voltage tolerance ±10%
  - 3.3. Power
    - a. At turn on < 6 Watts @ +25°C
    - b. Slope \* -0.024 Watts/°C typical


To calculate the typical steady state power  
use the following formula.  
 $P_{ss} = (TT - \text{ambient temperature of unit})^\circ\text{C} \times 0.024 \text{ (Watts)}$
4. MECHANICAL
  - 4.1. Heated cavity holds  
the following crystals HC-18/U, HC-25/U,  
HC-42/U, HC-43/U,  
HC-49/U, and HC-50/U
  - 4.2. Applicable series M43 series
  - 4.3. Model number M43VVTT (Customer specified)
  - 4.4. Outline drawing 125-365

\* In still air.

See ISOTEMP application note 146-003 for design considerations.


|  |         |           |               |   |          |     |
|--|---------|-----------|---------------|---|----------|-----|
| CHARLOTTESVILLE, VA USA<br>www.isotemp.com | CODE ID | MODEL NO. | PAGE OF TOTAL |   | DWG. NO. | REV |
|  | 31785   | M43VVTT   | 1             | 1 | 114-1183 | -   |

.750 DIA.




| PIN CONNECTIONS   |   |
|-------------------|---|
| PIN               | FUNCTION                                  |
| 1                 | +VDC                                      |
| 2<br>(See Note 3) | TEMPERATURE ADJUST<br>OR<br>NOT CONNECTED |
| 3                 | 0 VDC                                     |

CRYSTAL CAVITY

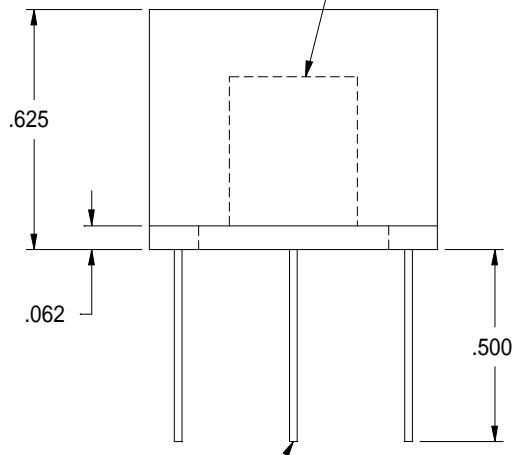

.020 DIA. PIN  
(3 PLACES)

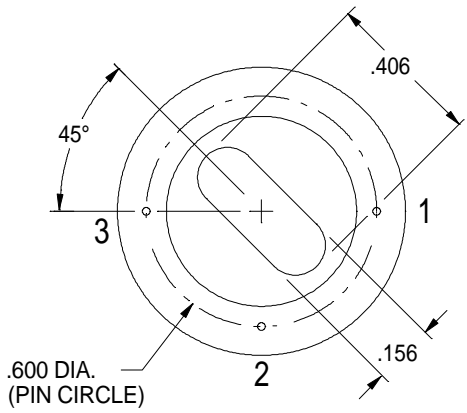

NOTE:

- CRYSTAL CAVITY IS CONNECTED TO 0 VDC
- MARKING: LABEL  
 MODEL = M43VVTT  
 or  
 MAJ43VV  
 VV = VOLTAGE  
 TT = SET POINT TEMPERATURE  
 XXXX = DATE CODE
- "TEMPERATURE ADJUST"  
 FOR M43AJVV MODELS  
 "NOT CONNECTED"  
 FOR M43VVTT MODELS

FORM NO. 120-081D



OSCILLATORS

CHARLOTTESVILLE, VIRGINIA

NAME: OUTLINE DRAWING  
(M43 & MAJ43 SERIES)

CODE I.D. NO.  
**31785**

SCALE: 2:1  
DWN. BY: WEW

DATE: 05-07-91  
APPR'D. BY: TST

| LET | REVISION                          | BY  | APP | DATE     |
|-----|-----------------------------------|-----|-----|----------|
| B   | REDRAWN, NEW FORM, REVISED NOTES. | LRB | DAG | 08-15-00 |
|     |                                   |     |     |          |
|     |                                   |     |     |          |
|     |                                   |     |     |          |

**TOLERANCES**  
 UNLESS OTHERWISE SPECIFIED:  
 ANGLES: ±1 DEGREE  
 FRACTIONS: ±1/32 INCH  
 DECIMALS: .XX ±.015, .XXX ±.010  
 COVER MATERIAL: GLASS-FIBRE FILLED  
 DIALYL PHTHALATE  
 BASE MATERIAL: VALOX 420 SEO BLACK  
 PIN MATERIAL: KOVAR WITH 60/40 SOLDER  
 ELECTROPLATE OVER NICKEL  
 FINISH: N/A  
 MARK: LABEL

DWG: 125-365  
 REV: B  
 SHT: 1 OF 1