

2,500 V - 16,000 V Rectifiers

10 mA - 100 mA Forward Current

100 ns Recovery Time

**M25UFG M50UFG
M100UFG M160UFG**

AXIAL LEADED
HERMETICALLY SEALED




4

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V _{rrm})	Average Rectified Current (I _o)		Reverse Current @ V _{rrm} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance θ _{J-L}			Junction Cap. @50VDC @ 1kHz (C _j)
		55°C(1)	100°C(2)	25°C	100°C	25°C					L=000	L=.125	L=.250	
		Volts	mA	mA	µA	µA	Volts				mA	Amps	Amps	
M25UFG	2500	100	50	0.1	10	7.0	25	8.0	1.3	100	18	30	50.0	2.0
M50UFG	5000	50	25	0.1	10	9.0	25	4.0	0.8	100	18	30	50.0	1.0
M100UFG	10000	25	12	0.1	10	14.0	25	2.0	0.4	100	18	30	50.0	0.5
M160UFG	16000	10	5	0.1	10	35.0	10	1.0	0.2	100	33	45	65.0	0.5

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)I_f=12.5mA, I_r=25mA, I_{rr}=6.3mA • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200°C

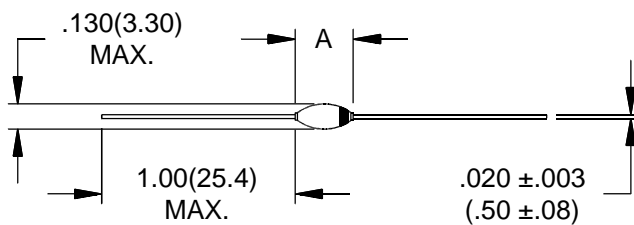

Part	A
M25UFG	
M50UFG	.300(7.62) MAX.
M100UFG	
M160UFG	.350(8.89) MAX.



Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

M25UFG M50UFG M100UFG M160UFG

