

## MSM511000A

1,048,576-WORD x 1-BIT DYNAMIC RAM

### GENERAL DESCRIPTION


The MSM511000A is a new generation dynamic RAM organized as 1,048,576 words x 1 bit. The technology used to fabricate the MSM511000A is OKI's CMOS silicon gate process technology. The device operates at a single +5V power supply. Its I/O pins are TTL compatible.

### FEATURES


- Silicon gate, triple polysilicon CMOS, 1-transistor memory cell
- Single +5V power supply,  $\pm 10\%$  tolerance
- Input: TTL compatible, address input, data input latch
- Output: TTL compatible, tristate, nonlatch
- Refresh: 512 cycles/8 ms
- Common I/O capability using Early Write operation
- 1,048,576-word x 1-bit organization
- Fast page mode, read/write capability
- $\overline{\text{CAS}}$  before  $\overline{\text{RAS}}$  refresh, Hidden refresh,  $\overline{\text{RAS}}$ -only refresh capability
- Gated  $\overline{\text{CAS}}$
- Built-in  $V_{\text{BB}}$  generator circuit

Family	Access Time (Max.)	Cycle Time (Min.)	Power Dissipation	
			Operating (Max.)	Standby (Max.)
MSM511000A-70	70ns	140ns	468mW	www.DataSheet4U.com 415mW 5.5mW
MSM511000A-80	80ns	160ns	415mW	
MSM511000A-10	100ns	190ns	358mW	

PIN CONFIGURATION (TOP VIEW)

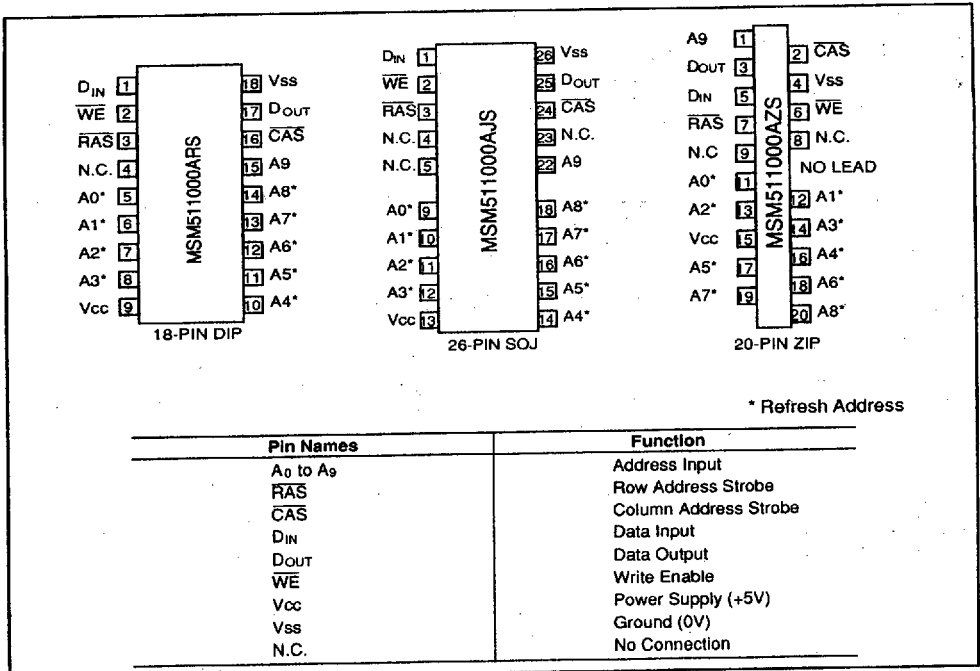

FUNCTIONAL BLOCK DIAGRAM

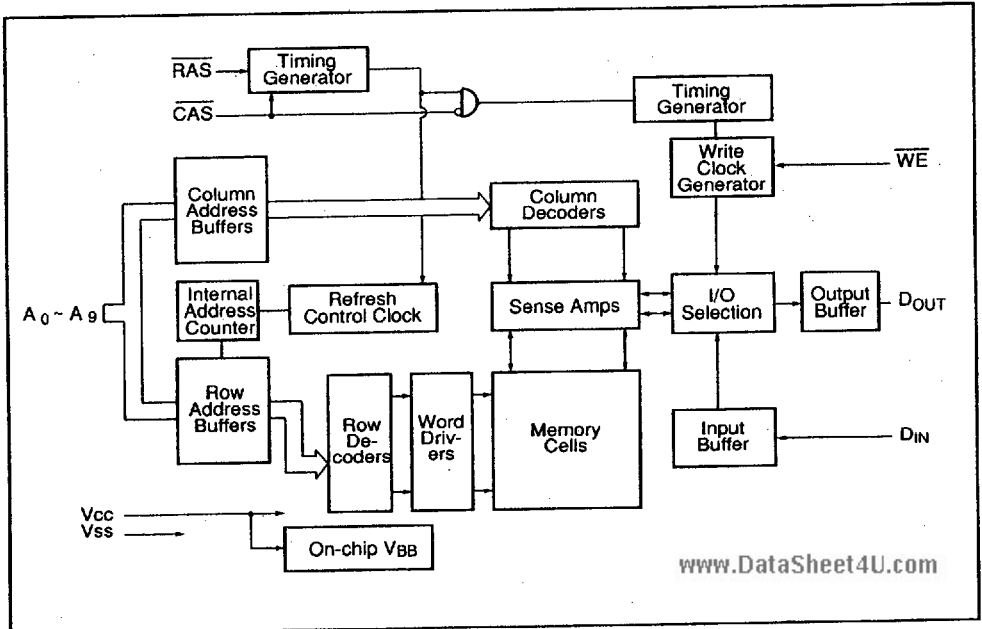

## ELECTRICAL CHARACTERISTICS

### ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Conditions	Value	Unit
Voltage on any pin relative to $V_{SS}$	$V_T$	$T_a = 25^\circ\text{C}$	-1.0 to +7.0	V
Short circuit output current	$I_{OS}$	$T_a = 25^\circ\text{C}$	50	mA
Power dissipation	$P_D$	$T_a = 25^\circ\text{C}$	1	W
Operating temperature	$T_{opr}$	-	0 to +70	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-	-55 to +150	$^\circ\text{C}$

Note: Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Conditions	Value			Unit	Operating Temperature
			Min.	Typ.	Max.		
Supply voltage	$V_{CC}$	-	4.5	5.0	5.5	V	0 $^\circ\text{C}$ to +70 $^\circ\text{C}$
	$V_{SS}$	-	0	0	0	V	
Input high voltage	$V_{IH}$	-	2.4	-	6.5	V	
Input low voltage	$V_{IL}$	-	-1.0	-	-	V	

# DC CHARACTERISTICS

( $V_{CC} = 5V \pm 10\%$ ,  $T_a = 0$  to  $+70^\circ C$ )

www.DataSheet4U.com

Parameter	Symbol	Conditions	MSM 511000A-70		MSM 511000A-80		MSM 511000A-10		Unit	Note	
			Min.	Max.	Min.	Max.	Min.	Max.			
			Output high voltage	$V_{OH}$	$I_{OH} = -5.0mA$	2.4	$V_{CC}$	2.4			$V_{CC}$
Output low voltage	$V_{OL}$	$I_{OL} = 4.2mA$	0	0.4	0	0.4	0	0.4	V	-	
Input leakage current	$I_{LI}$	$0V \leq V_I \leq 6.5V$ ; all other pins not under test = $0V$	-10	10	-10	10	-10	10	$\mu A$	-	
Output leakage current	$I_{LO}$	$D_{OUT}$ disable $0V \leq V_O \leq 5.5V$	-10	10	-10	10	-10	10	$\mu A$	-	
Average power supply current* (Operating)	$I_{CC1}$	$\overline{RAS}$ , $\overline{CAS}$ cycling, $t_{RC} = \min$	-	85	-	75	-	65	mA	-	
Power supply current* (Standby)	$I_{CC2}$	$\overline{RAS} = V_{IH}$ $CAS = V_{IH}$ $D_{OUT} = Hz$	TTL	-	2	-	2	-	2	mA	-
		MOS	-	1	-	1	-	1			
Average power supply current* ( $\overline{RAS}$ only refresh)	$I_{CC3}$	$\overline{RAS}$ cycling, $CAS = V_{IH}$ $t_{RC} = \min$	-	85	-	75	-	65	mA	-	
Average power supply current* ( $\overline{CAS}$ before $\overline{RAS}$ refresh)	$I_{CC6}$	$\overline{RAS}$ cycling, $\overline{CAS}$ before $\overline{RAS}$	-	85	-	75	-	65	mA	-	
Average power supply current* (Fast page mode)	$I_{CC7}$	$\overline{RAS} = V_{IL}$ , $\overline{CAS}$ cycling $t_{PC} = \min$	-	70	-	60	-	55	mA	-	

$I_{CC}$  depends on output loading and cycle rates. Specified values are obtained with the output open.

## CAPACITANCE

( $T_a = 25^\circ C$ ,  $f = 1$  MHz)

Parameter	Symbol	Conditions	Value		Unit
			Min.	Max.	
Input capacitance ( $A_0$ to $A_9, D_{IN}$ )	$C_{IN1}$	-	-	6	pF
Input capacitance ( $\overline{RAS}$ , $\overline{CAS}$ , $\overline{WE}$ )	$C_{IN2}$	-	-	7	pF
Output capacitance ( $D_{OUT}$ )	$C_{OUT}$	-	-	7	pF

www.DataSheet4U.com

# AC CHARACTERISTICS


(V<sub>CC</sub> = 5V ± 10%, T<sub>a</sub> = 0 to +70°C) Notes 1,2,3

Parameter	Symbol	MSM 511000A-70		MSM 511000A-80		MSM 511000A-10		Unit	Notes
		Min.	Max.	Min.	Max.	Min.	Max.		
Refresh period	t <sub>REF</sub>	–	8	–	8	–	8	ms	–
Random read or write cycle time	t <sub>RC</sub>	140	–	160	–	190	–	ns	–
Read/write cycle time	t <sub>RWC</sub>	165	–	185	–	220	–	ns	–
Fast page mode cycle time	t <sub>PC</sub>	45	–	50	–	55	–	ns	–
Fast page mode read/write cycle time	t <sub>PRWC</sub>	70	–	75	–	85	–	ns	–
Access time from $\overline{\text{RAS}}$	t <sub>RAC</sub>	–	70	–	80	–	100	ns	4,5,6
Access time from $\overline{\text{CAS}}$	t <sub>CAC</sub>	–	20	–	20	–	25	ns	4,5
Access time from column address	t <sub>AA</sub>	–	35	–	40	–	50	ns	4,6
Access time from $\overline{\text{CAS}}$ precharge	t <sub>CPA</sub>	–	40	–	45	–	50	ns	4
Output low impedance time from $\overline{\text{CAS}}$	t <sub>CLZ</sub>	0	–	0	–	0	–	ns	4
Output buffer turn-off delay time	t <sub>OFF</sub>	0	20	0	20	0	20	ns	–
Transition time	t <sub>T</sub>	3	50	3	50	3	50	ns	3
$\overline{\text{RAS}}$ precharge time	t <sub>RP</sub>	60	–	70	–	80	–	ns	–
$\overline{\text{RAS}}$ pulse width	t <sub>RAS</sub>	70	10,000	80	10,000	100	10,000	ns	–
$\overline{\text{RAS}}$ pulse width (Fast page mode)	t <sub>RASP</sub>	70	100,000	80	100,000	100	100,000	ns	–
$\overline{\text{RAS}}$ hold time	t <sub>RSH</sub>	20	–	20	–	25	–	ns	–
$\overline{\text{CAS}}$ precharge time (Fast page mode)	t <sub>CP</sub>	10	–	10	–	10	–	ns	–
$\overline{\text{CAS}}$ pulse width	t <sub>CAS</sub>	20	10,000	20	10,000	25	10,000	ns	–
$\overline{\text{CAS}}$ hold time	t <sub>CSH</sub>	70	–	80	–	100	–	ns	–
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay time	t <sub>RCD</sub>	20	50	22	60	25	75	ns	5
$\overline{\text{RAS}}$ to column address delay time	t <sub>RAD</sub>	15	35	17	40	20	50	ns	6
$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ precharge time	t <sub>CRP</sub>	10	–	10	–	10	–	ns	–
Row address set-up time	t <sub>ASR</sub>	0	–	0	–	0	–	ns	–
Row address hold time	t <sub>RAH</sub>	10	–	12	–	15	–	ns	–
Column address set-up time	t <sub>ASC</sub>	0	–	0	–	0	–	ns	–
Column address hold time	t <sub>CAH</sub>	15	–	15	–	20	–	ns	–
Column address hold time from $\overline{\text{RAS}}$	t <sub>AR</sub>	55	–	60	–	75	–	ns	–
Column address to $\overline{\text{RAS}}$ lead time	t <sub>RAL</sub>	35	–	40	–	50	–	ns	–


# AC CHARACTERISTICS (CONT.)

Parameter	Symbol	MSM 511000A- 70		MSM 511000A- 80		MSM 511000A- 10		Unit	Notes
		Min.	Max.	Min.	Max.	Min.	Max.		
Read command set-up time	$t_{RCS}$	0	–	0	–	0	–	ns	–
Read command hold time	$t_{RCH}$	0	–	0	–	0	–	ns	8
Write command hold time from $\overline{RAS}$	$t_{WCR}$	55	–	60	–	75	–	ns	–
Write command set-up time	$t_{WCS}$	0	–	0	–	0	–	ns	7
Write command hold time	$t_{WCH}$	15	–	15	–	20	–	ns	–
Write command pulse width	$t_{WP}$	15	–	15	–	20	–	ns	–
Write command to $\overline{RAS}$ lead time	$t_{RWL}$	20	–	20	–	25	–	ns	–
Write command to $\overline{CAS}$ lead time	$t_{CWL}$	20	–	20	–	25	–	ns	–
Data-in set-up time	$t_{DS}$	0	–	0	–	0	–	ns	–
Data-in hold time	$t_{DH}$	15	–	15	–	20	–	ns	–
Data-in hold time from $\overline{RAS}$	$t_{DHR}$	55	–	60	–	75	–	ns	–
$\overline{CAS}$ to $\overline{WE}$ delay time	$t_{CWD}$	20	–	20	–	25	–	ns	7
$\overline{RAS}$ to $\overline{WE}$ delay time	$t_{RWD}$	70	–	80	–	100	–	ns	7
Column address to $\overline{WE}$ delay time	$t_{AWD}$	35	–	40	–	50	–	ns	7
Read command hold time reference to $\overline{RAS}$	$t_{RRH}$	0	–	10	–	10	–	ns	8
$\overline{RAS}$ to $\overline{CAS}$ set-up time ( $\overline{CAS}$ before $\overline{RAS}$ )	$t_{CSR}$	10	–	10	–	10	–	ns	–
$\overline{RAS}$ to $\overline{CAS}$ hold time ( $\overline{CAS}$ before $\overline{RAS}$ )	$t_{CHR}$	30	–	30	–	30	–	ns	–
$\overline{CAS}$ active delay time from $\overline{RAS}$ precharge	$t_{RPC}$	10	–	10	–	10	–	ns	–
$\overline{CAS}$ precharge time (Refresh counter test)	$t_{CPT}$	40	–	40	–	50	–	ns	–
$\overline{CAS}$ precharge time	$t_{CPN}$	10	–	10	–	15	–	ns	–


# READ CYCLE

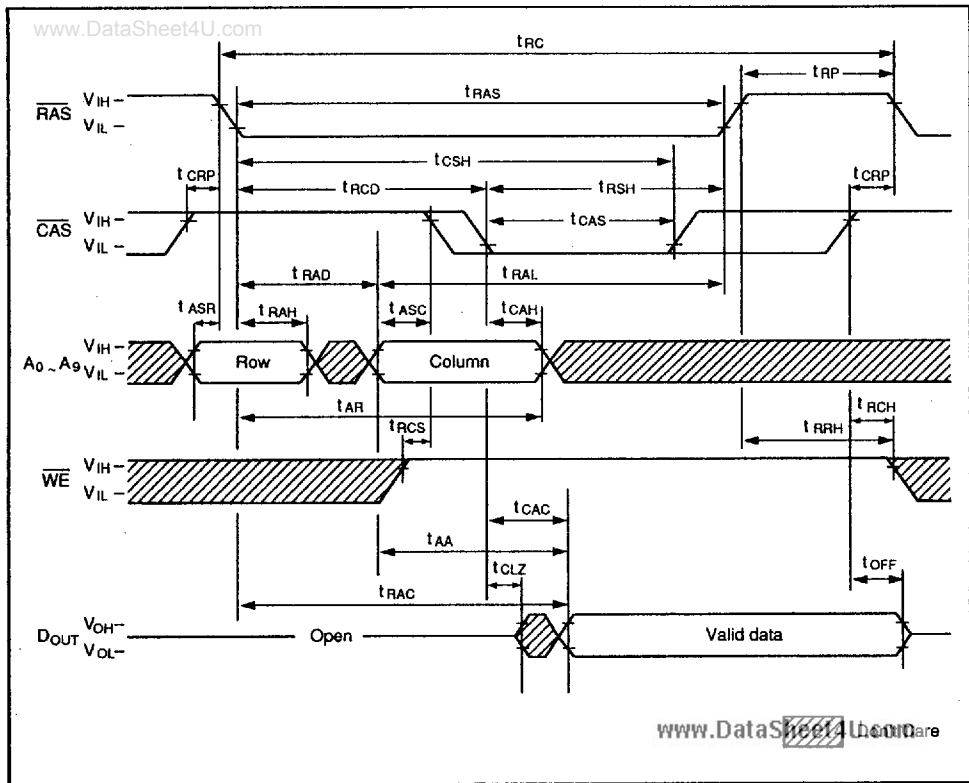

# WRITE CYCLE (EARLY WRITE)

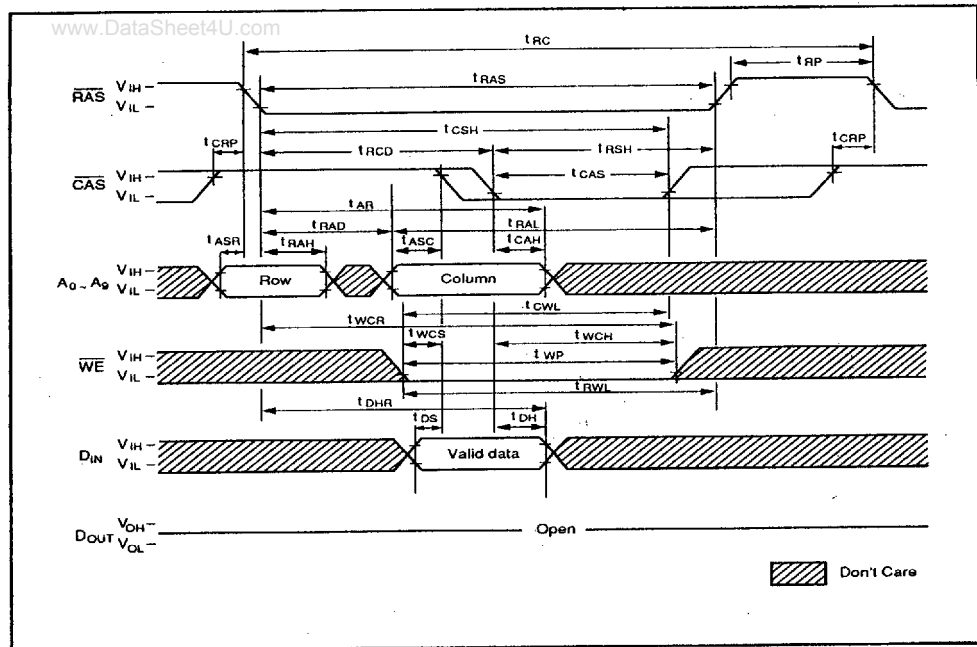


# READ/WRITE CYCLE

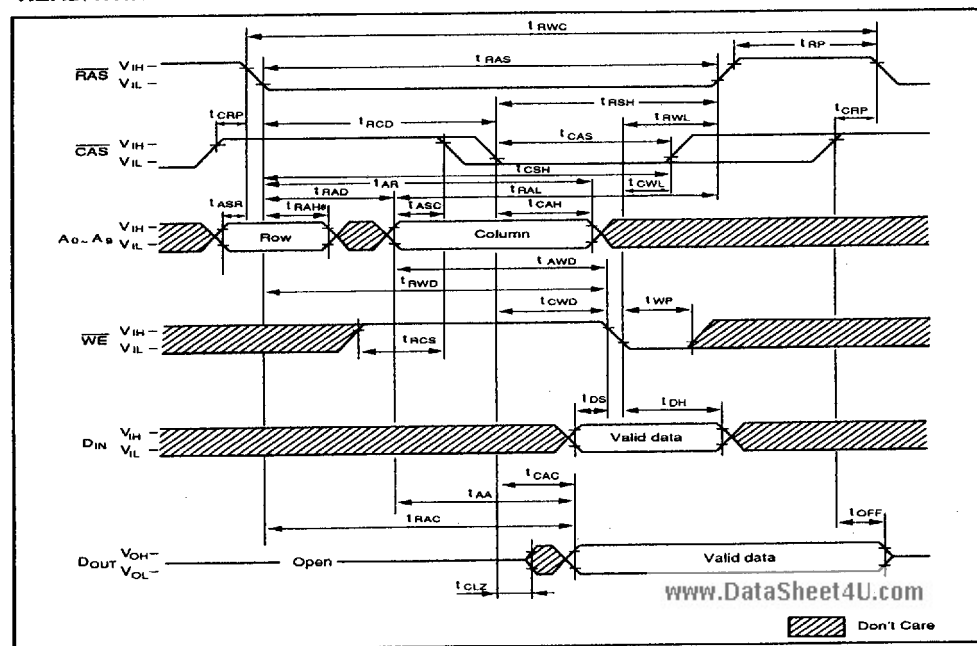






# FAST PAGE MODE READ/WRITE CYCLE

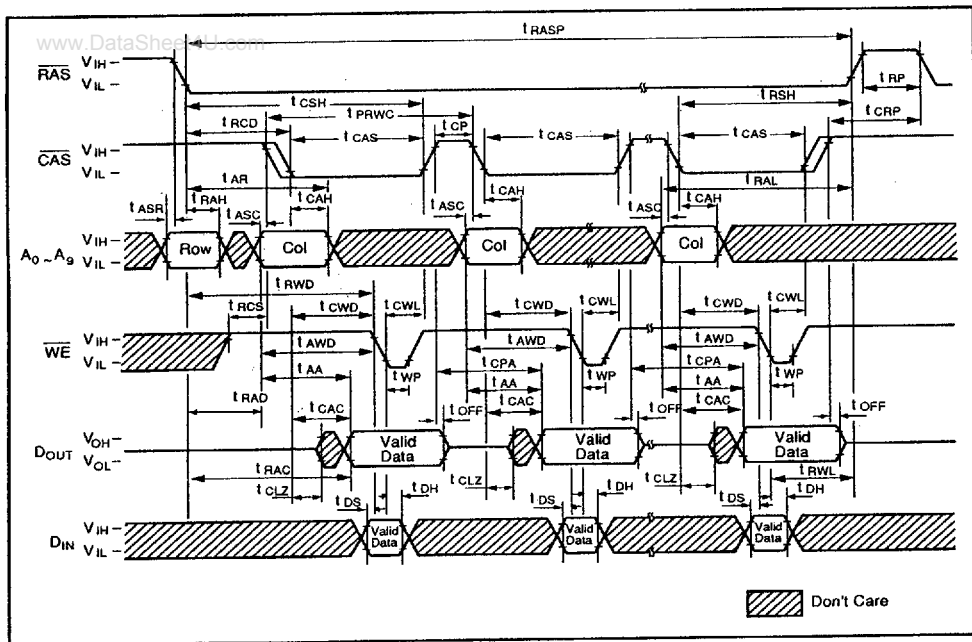


# RAS-ONLY REFRESH CYCLE

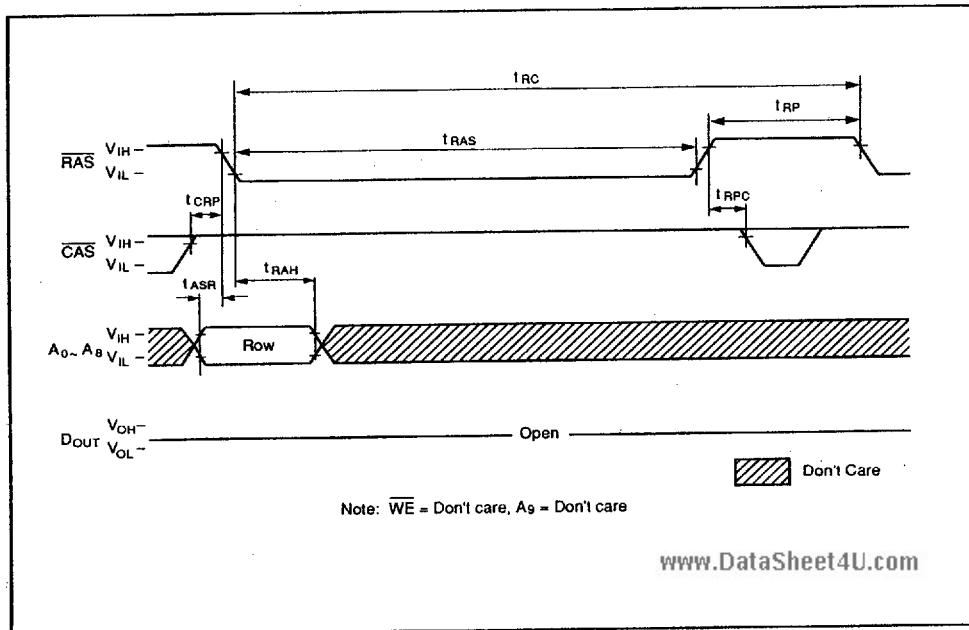


## CAS BEFORE RAS AUTO-REFRESH CYCLE

www.DataSheet4U.com

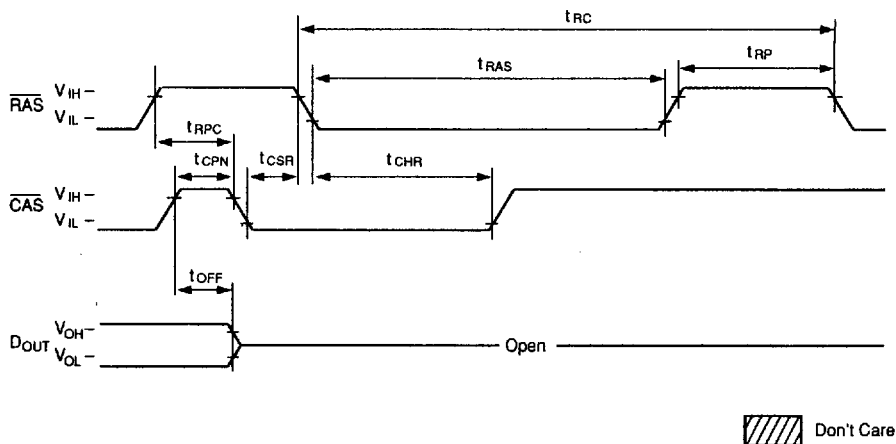

Note:  $\overline{WE}$  = Don't care,  $A_0 \sim A_9$  = Don't care


## HIDDEN REFRESH READ CYCLE

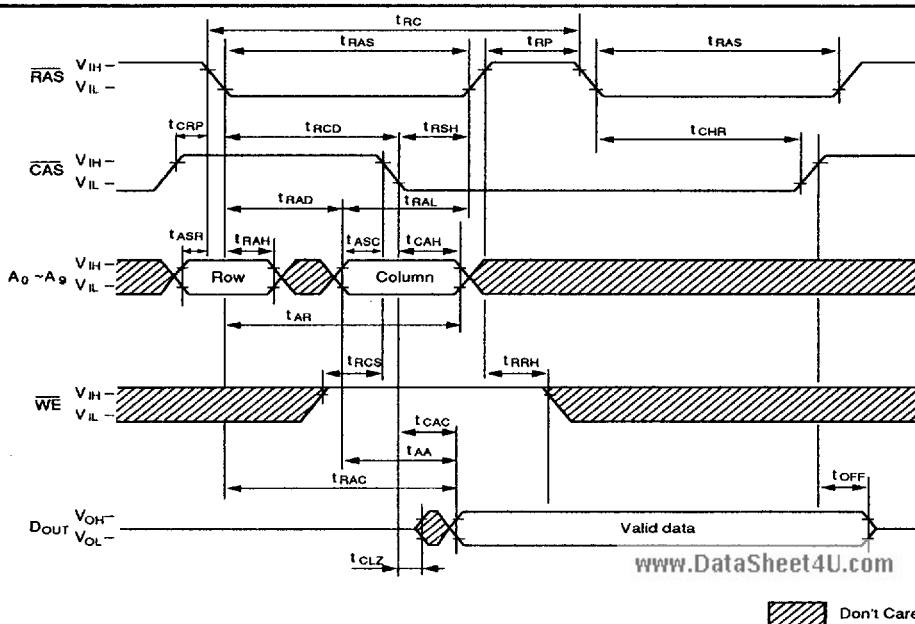

www.DataSheet4U.com

Don't Care

# HIDDEN REFRESH WRITE CYCLE

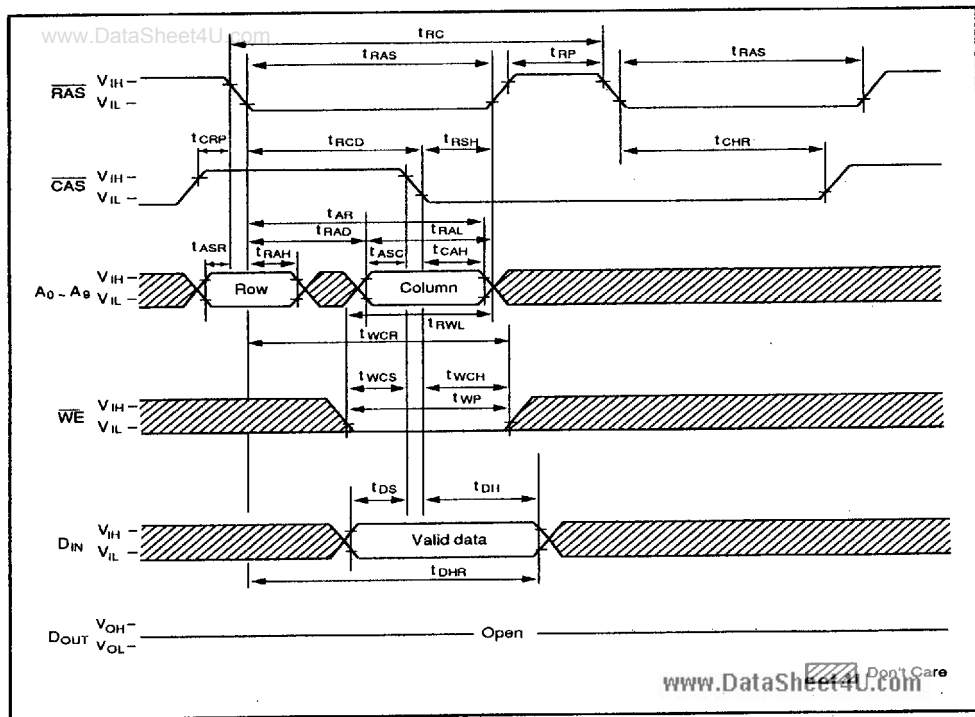

# CAS BEFORE RAS REFRESH COUNTER TEST CYCLE

www.DataSheet4U.com

