

**M54456P**

MITSUBISHI (DGTL LOGIC)

3LE D ■ 6249827 0014423 7 ■ MIT3

**1/64 HIGH SPEED DIVIDER WITH ECL OUTPUT****DESCRIPTION**

The M54456P is a semiconductor integrated circuit consisting of a built-in 1/64 high-speed frequency divider with an ECL circuit configuration.

**FEATURES**

- Ultra-high-speed operation ( $f_{max} = 1.2\text{GHz}$ )
- Operation at low input amplitude (300mV<sub>p-p</sub> minimum input amplitude)
- ECL level output
- Two inputs (UHF and VHF)
- TTL level compatible band switching input

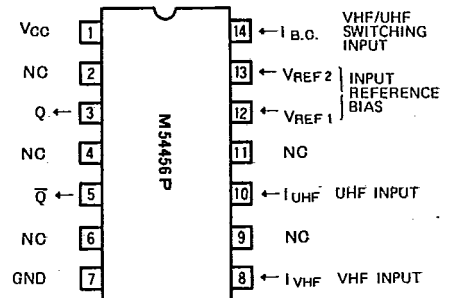
**APPLICATIONS**

Prescalers for PLL synthesizer TV tuners; digital equipment for consumer and industrial applications

**FUNCTION**

This 1/64 frequency divider is based on an ECL circuit configuration. When a frequency between 450MHz and 950MHz is applied to the UHF input ( $I_{UHF}$ ) pin, a 1/64-divided frequency output is obtained. The same output is obtained when a frequency between 80MHz and 350MHz is applied to the VHF input ( $I_{VHF}$ ) pin. The outputs ( $Q$ ,  $\bar{Q}$ ) conform to ECL levels.

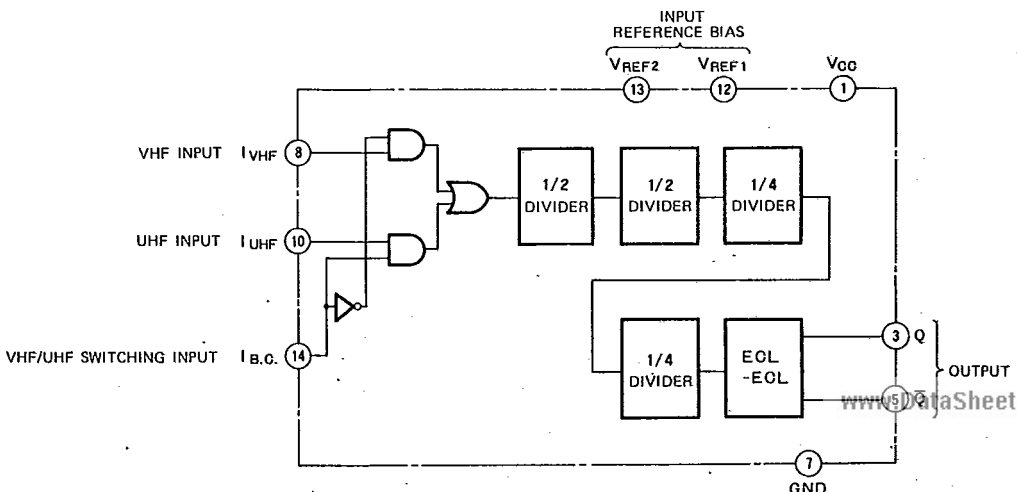
A wide-band operating system should be used when the UHF input pin is supplied with frequencies ranging from 80MHz to 950MHz.

**PIN CONFIGURATION**

Outline 14P4

NC: NO CONNECTION

When the band switching input (I<sub>B.C.</sub>) pin is high or open, the UHF input (I<sub>UHF</sub>) pin can be used and when it is low the VHF input (I<sub>VHF</sub>) pin can be used. Do not supply signals simultaneously to the UHF input (I<sub>UHF</sub>) and VHF input (I<sub>VHF</sub>) pins.

**BLOCK DIAGRAM**

## ABSOLUTE MAXIMUM RATINGS (Ta = -10 ~ +75°C, unless otherwise noted)

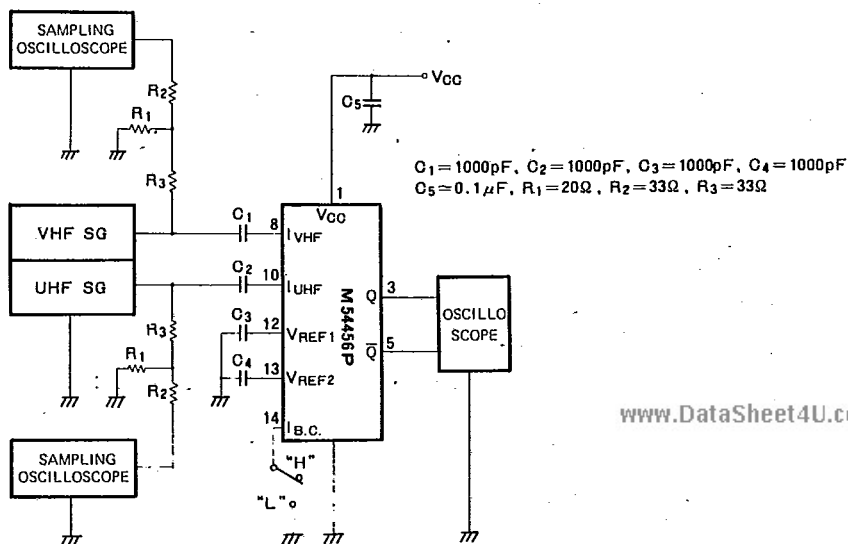
Symbol	Parameter	Condition	Limits	Unit
V <sub>CC</sub>	Supply voltage		9	V
V <sub>I</sub>	Input voltage		2.5	V <sub>p-p</sub>
V <sub>B, C</sub>	Band switching input voltage		-0.5 ~ +7.2	V
I <sub>O</sub>	Output current		-30 ~ +30	mA
T <sub>opr</sub>	Operating temperature		-10 ~ +75	°C
T <sub>stg</sub>	Storage temperature		-55 ~ +125	°C

## RECOMMENDED OPERATING CONDITIONS (Ta = -10 ~ +75°C, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min	Typ	Max	
V <sub>CC</sub>	Supply voltage	6.1	6.8	7.5	V
I <sub>OL</sub>	Low-level output current			5	mA

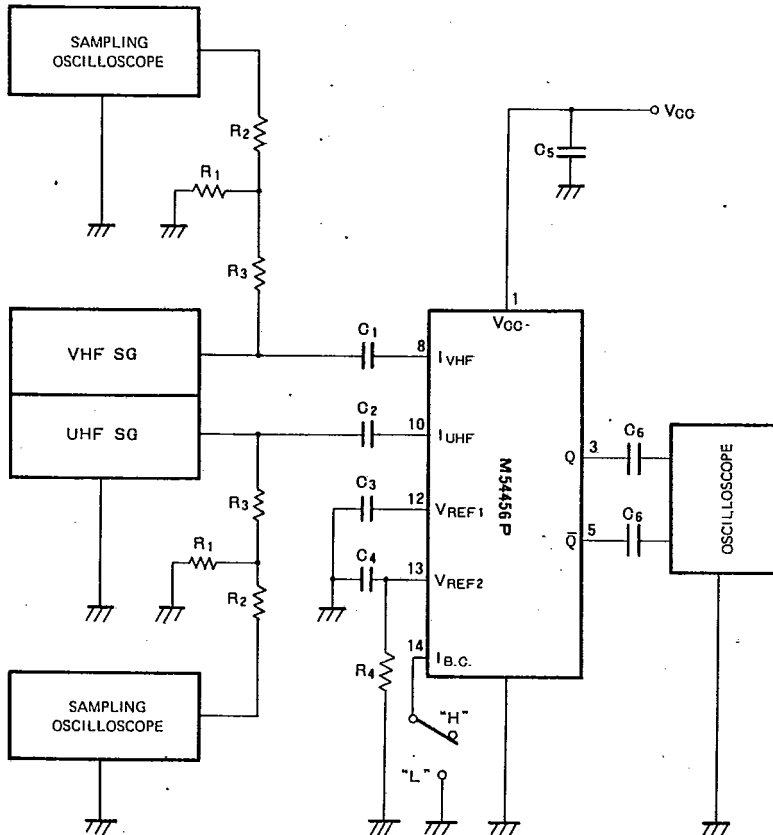
## ELECTRICAL CHARACTERISTICS (Ta = -10 ~ +75°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
I <sub>CC</sub>	Circuit current	V <sub>CC</sub> =6.8V		68		mA
V <sub>O</sub>	Output voltage	V <sub>CC</sub> =6.8V		0.8		V <sub>p-p</sub>
V <sub>BCH</sub>	High-level band switching 2 input voltage		2.5			V
V <sub>BCL</sub>	Low-level band switching 2 input voltage				0.4	V
V <sub>S</sub>	VHF input sensitivity	V <sub>CC</sub> =6.8V, Ta=25°C f <sub>IN</sub> =80~350MHz			300	mV <sub>p-p</sub>
U <sub>S1</sub>	UHF input sensitivity 1	V <sub>CC</sub> =6.8V, Ta=25°C f <sub>IN</sub> =450~950MHz			300	mV <sub>p-p</sub>
U <sub>S2</sub>	UHF input sensitivity 2	V <sub>CC</sub> =6.8V, Ta=25°C f <sub>IN</sub> =80~350MHz			300	mV <sub>p-p</sub>
V <sub>max</sub>	VHF maximum input level	f <sub>IN</sub> =80~350MHz	1			V <sub>p-p</sub>
U <sub>max</sub>	UHF maximum input level	f <sub>IN</sub> =450~950MHz	1			V <sub>p-p</sub>

f<sub>max</sub> TEST CIRCUIT

## APPLICATION EXAMPLE

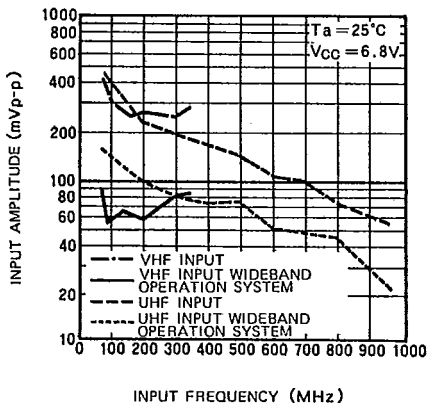
For wide-band operation



Operation across an even wider frequency range is enabled for the UHF input by setting  $R_4$  between  $V_{REF2}$  and GND with  $C_1 = 1000\text{pF}$ ,  $C_2 = 1000\text{pF}$ ,  $C_3 = 1000\text{pF}$ ,  $C_4 = 1000\text{pF}$ ,  $C_5 = 0.1\mu\text{F}$ ,  $C_6 = 0.1\mu\text{F}$ ,  $R_1 = 20\Omega$ ,  $R_2 = 33\Omega$ ,  $R_3 = 33\Omega$ ,  $R_4 = 36\text{k}\Omega$ .

## TYPICAL CHARACTERISTICS

MINIMUM INPUT AMPLITUDE VS INPUT FREQUENCY



MINIMUM INPUT AMPLITUDE VS SUPPLY VOLTAGE

