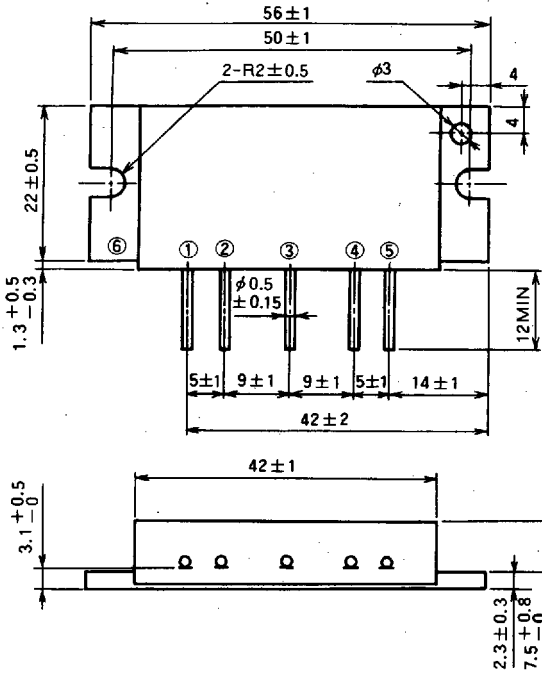
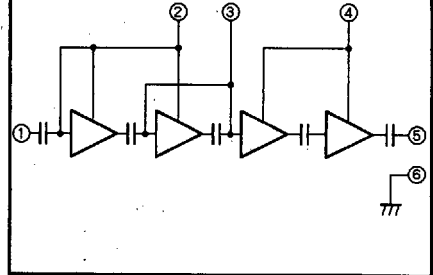


OUTLINE DRAWING

Dimensions in mm

**H16****BLOCK DIAGRAM**

PIN :

- ① Pin : RF INPUT
- ② Vcc1 : 1st. DC SUPPLY
- ③ VBB : BASE BIAS SUPPLY
- ④ Vcc2 : 2nd. DC SUPPLY
- ⑤ Po : RF OUTPUT
- ⑥ GND : FIN

DataSheet4U.com

DataSheet

ABSOLUTE MAXIMUM RATINGS (T_c = 25 °C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V _{cc}	Supply voltage	V _{BB} ≤ 5V	16	V
V _{BB}	Base bias	V _{cc} ≤ 12.5V	6	V
I _{cc}	Total current		5	A
P _{in(max)}	Input power	Z _G = Z _L = 50 Ω	20	mW
P _{o(max)}	Output power	Z _G = Z _L = 50 Ω	20	W
T _{c(OP)}	Operation case temperature		-30 to 110	°C
T _{stg}	Storage temperature		-40 to 110	°C

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (T_c = 25 °C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range	P _{in} = 10mW, V _{cc1, 2} = 12.5V V _{BB} = 5V Z _G = Z _L = 50 Ω	470	512	MHz
P _o	Output power		13		W
η _T	Total efficiency		35		%
2f _o	2nd. harmonic			-30	dBc
3f _o	3rd. harmonic			-35	dBc
ρ _{in}	Input VSWR			2.8	-
-	Load VSWR tolerance	V _{cc1} = 12.5V, V _{cc2} = 15.2V, V _{BB} = 5V P _o = 13W (P _{in} : controlled) Load VSWR = 20:1 (All phase), 2sec. Z _G = 50Ω	No degradation or destroy		-

Note. Above parameters, ratings, limits and conditions are subject to change.