

MITSUBISHI LSTTLs
M74LS138P

3-LINE TO 8-LINE DECODER/DEMULTIPLEXER

DESCRIPTION

The M74LS138P is a semiconductor integrated circuit consisting of a 3-bit binary-octal decoder/demultiplexer with enable inputs.

FEATURES

- 3 classes of enable inputs
- 4 to 16 decoder/demultiplexer functions are provided without use of external components.
- Wide operating temperature range ($T_a = -20 \sim +75^\circ\text{C}$)


APPLICATION

General purpose, for use in industrial and consumer equipment.

FUNCTIONAL DESCRIPTION


For use as a decoder, specify inputs D_A , D_B , and D_C in 3-bit binary code. In the case of decoding function, the E_1 is kept in high state while $\overline{E_2}$ and $\overline{E_3}$ are kept low. If E_1 , $\overline{E_2}$ and $\overline{E_3}$ are not in these conditions, all the outputs become high, irrespective of the status of $D_A \sim D_C$. For use as a demultiplexer, $\overline{E_1}$, $\overline{E_2}$ and E_3 are used as data inputs and D_A , D_B , and D_C as selection inputs. This forms a 1-line to 8-line demultiplexer.

PIN CONFIGURATION (TOP VIEW)

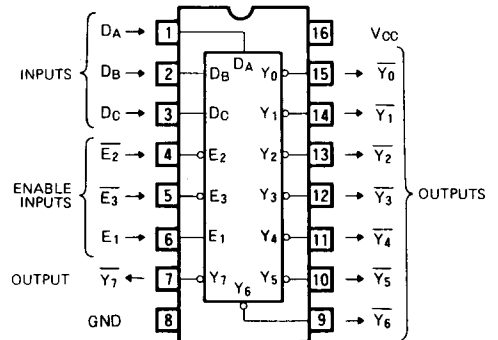

Outline 16P4

BLOCK DIAGRAM

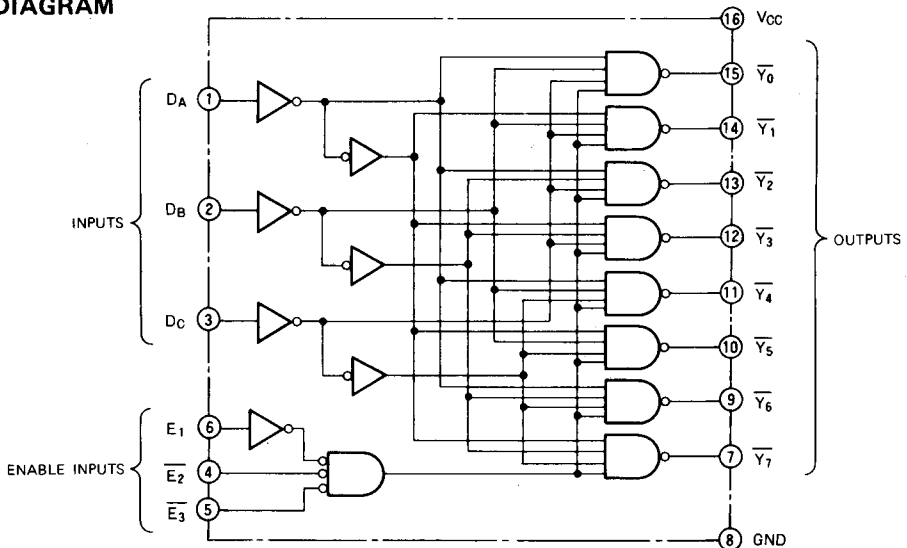

3-LINE TO 8-LINE DECODER/DEMULTIPLEXER

FUNCTION TABLE (Note 1)

| E ₁ | \overline{E}_X | D _C | D _B | D _A | \overline{Y}_0 | \overline{Y}_1 | \overline{Y}_2 | \overline{Y}_3 | \overline{Y}_4 | \overline{Y}_5 | \overline{Y}_6 | \overline{Y}_7 |
|----------------|------------------|----------------|----------------|----------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| X | H | X | X | X | H | H | H | H | H | H | H | H |
| L | X | X | X | X | H | H | H | H | H | H | H | H |
| H | L | L | L | L | L | H | H | H | H | H | H | H |
| H | L | L | L | H | H | L | H | H | H | H | H | H |
| H | L | L | H | L | H | H | L | H | H | H | H | H |
| H | L | L | H | H | H | H | H | L | H | H | H | H |
| H | L | H | L | L | H | H | H | H | L | H | H | H |
| H | L | H | L | H | H | H | H | H | H | L | H | H |
| H | L | H | H | L | H | H | H | H | H | H | L | H |
| H | L | H | H | H | H | H | H | H | H | H | H | L |

Note 1: $\overline{E}_X = \overline{E}_2 + \overline{E}_3$
X : irrelevant

ABSOLUTE MAXIMUM RATINGS (T_a = -20 ~ +75°C, unless otherwise noted)

| Symbol | Parameter | Conditions | Limits | Unit |
|------------------|--|------------------|------------------------|------|
| V _{CC} | Supply voltage | | -0.5 ~ +7 | V |
| V _I | Input voltage | | -0.5 ~ +15 | V |
| V _O | Output voltage | High-level state | -0.5 ~ V _{CC} | V |
| T _{opr} | Operating free-air ambient temperature range | | -20 ~ +75 | °C |
| T _{stg} | Storage temperature range | | -65 ~ +150 | °C |

RECOMMENDED OPERATING CONDITIONS (T_a = -20 ~ +75°C, unless otherwise noted)

| Symbol | Parameter | Limits | | | Unit |
|-----------------|---------------------------|--------|-----|------|------|
| | | Min | Typ | Max | |
| V _{CC} | Supply voltage | 4.75 | 5 | 5.25 | V |
| I _{OH} | High-level output current | | | | μA |
| | V _{OH} ≥ 2.7V | 0 | | -400 | |
| I _{OL} | Low-level output current | | | | mA |
| | V _{OL} ≤ 0.4V | 0 | | 4 | |
| | V _{OL} ≤ 0.5V | 0 | | 8 | |

ELECTRICAL CHARACTERISTICS (T_a = -20 ~ +75°C, unless otherwise noted)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|-----------------|---------------------------------------|---|-----------------------|------|------|------|
| | | | Min | Typ* | Max | |
| V _{IH} | High-level input voltage | | 2 | | | V |
| V _{IL} | Low-level input voltage | | | | 0.8 | V |
| V _{IC} | Input clamp voltage | V _{CC} = 4.75V, I _{IC} = -18mA | | | -1.5 | V |
| V _{OH} | High-level output voltage | V _{CC} = 4.75V, V _I = 0.8V V _I = 2V, I _{OH} = -400μA | 2.7 | 3.4 | | V |
| V _{OL} | Low-level output voltage | V _{CC} = 4.75V V _I = 0.8V, V _I = 2V | I _{OL} = 4mA | 0.25 | 0.4 | V |
| | | | I _{OL} = 8mA | 0.35 | 0.5 | V |
| I _{IH} | High-level input current | V _{CC} = 5.25V, V _I = 2.7V | | | 20 | μA |
| | | V _{CC} = 5.25V, V _I = 10V | | | 0.1 | mA |
| I _{IL} | Low-level input current | V _{CC} = 5.25V, V _I = 0.4V | | | -0.4 | mA |
| I _{OS} | Short-circuit output current (Note 2) | V _{CC} = 5.25V, V _O = 0V | -20 | | -100 | mA |
| I _{CC} | Supply current | V _{CC} = 5.25V (Note 3) | | 6.3 | 10 | mA |

* : All typical values are at V_{CC} = 5V, T_a = 25°C.

Note 2: All measurements should be done quickly, and not more than one output should be shorted at a time.

Note 3: I_{CC} is measured with all output off-state.


3-LINE TO 8-LINE DECODER/DEMULTIPLEXER

SWITCHING CHARACTERISTICS ($V_{CC}=5V$, $T_a=25^\circ C$, unless otherwise noted)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|-----------|---|------------------------|--------|-----|-----|------|
| | | | Min | Typ | Max | |
| t_{PLH} | Low-to-high-level, high-to-low-level output propagation time, from inputs D_A, D_B, D_C to output $\bar{Y}_0-\bar{Y}_7$ | delay gate stages 2 | 9 | 12 | 20 | ns |
| t_{PHL} | | | | | | |
| t_{PLH} | Low-to-high-level, high-to-low-level output propagation time, from inputs E_2, E_3 to outputs $\bar{Y}_0-\bar{Y}_7$ | delay gate stages 3 | 16 | 14 | 27 | ns |
| t_{PHL} | | | | | | |
| t_{PLH} | Low-to-high-level, high-to-low-level output propagation time, from input E_1 to outputs $\bar{Y}_0-\bar{Y}_7$ | delay gate stages 2 | 10 | 15 | 18 | ns |
| t_{PHL} | | | | | | |
| t_{PLH} | Low-to-high-level, high-to-low-level output propagation time, from input E_1 to outputs $\bar{Y}_0-\bar{Y}_7$ | delay gate stages 3 | 8 | 15 | 26 | ns |
| t_{PHL} | | | | | | |


$C_L = 15\text{ pF}$ (Note 4)

Note 4: Measurement circuit




- (1) The pulse generator (PG) has the following characteristics:
 PRR = 1MHz, $t_r = 6\text{ ns}$, $t_f = 6\text{ ns}$, $t_w = 500\text{ ns}$,
 $V_P = 3V_{P-P}$, $Z_0 = 50\Omega$
- (2) C_L includes probe and jig capacitance.

TIMING DIAGRAM (Reference level = 1.3V)

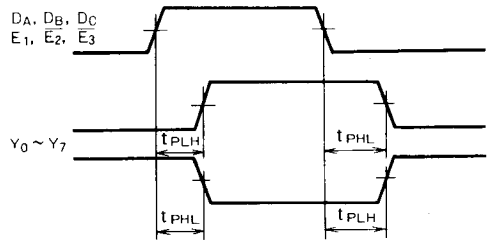

APPLICATION EXAMPLE


4-line to 16-line decoder/demultiplexer

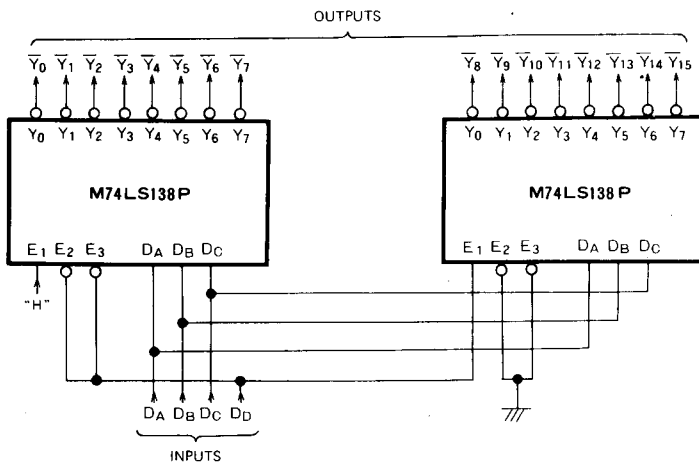

T-90-20


TYPE 14P4 14-PIN MOLDED PLASTIC DIL

Dimension in mm

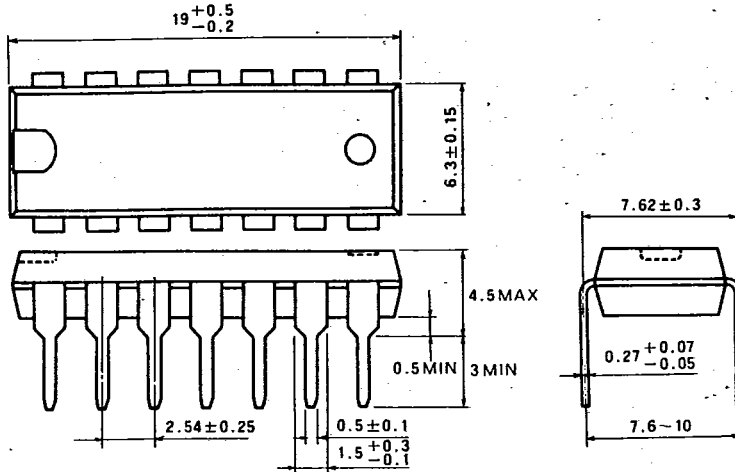

TYPE 16P4 16-PIN MOLDED PLASTIC DIL

Dimension in mm

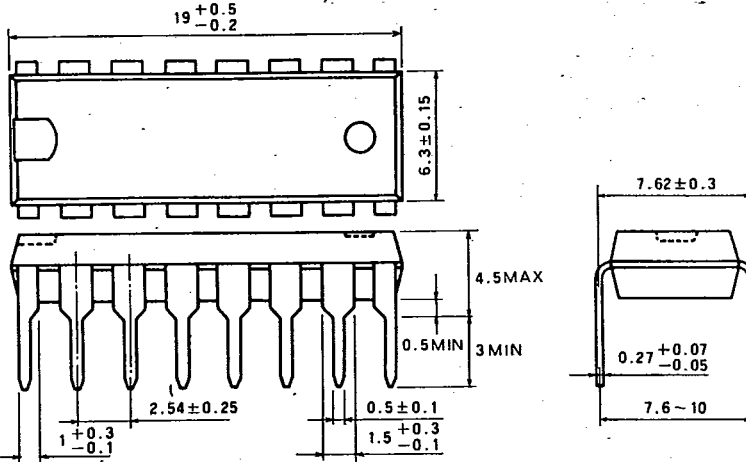

TYPE 20P4 20-PIN MOLDED PLASTIC DIL

Dimension in mm

