



## Low Cost Silicon Double Balanced HMIC™ Mixer 4.7 - 6.0 GHz

### Features

- 7.6 dB Typical Conversion Loss
- +3 to +7 dBm LO Drive
- HMIC™ IC Process
- Silicon Low Barrier Schottky Diode
- DC – 1050 MHz IF Bandwidth
- Low Cost Miniature Plastic Package


### Description

M/A-COM's MA4EX580L-1225 is a silicon monolithic 4.7 to 6.0 GHz double balanced mixer in a low cost miniature surface mount SOT-25 package. The die uses M/A-COM's unique HMIC™ silicon/glass process to achieve low loss passive elements while retaining the advantages of low barrier silicon Schottky barrier diodes.

### Applications

These mixers are well suited for high volume wireless and cellular applications where small size and repeatability are required. Typical applications include frequency conversion, modulation and demodulation in wireless receivers and

### SOT-25 Outline

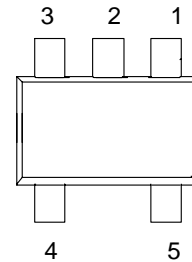

### Pin Configuration

PIN	Function	PIN	Function
1	RF	4	GND
2	GND	5	IF
3	LO	—	—

### Ordering Information

Model No.	Package
MA4EX580L-1225T	Tape and Reel

### Electrical Specifications @ +25°C

Parameter	Frequency Range	Test Conditions	Units	Typ.	Max.
Conversion Loss	4700 MHz 4.7 - 6.0 GHz	LO Drive = +3→+7 dBm RF = -10 dBm, IF = 60 MHz	dB	7.6 8.5	8.0 9.5
L - R Isolation	4700 MHz 4.7 - 6.0 GHz	LO Drive = +5 dBm RF Level = - 10 dBm	dB	23.0 20.0	—
L - I Isolation	4700 MHz 4.7 - 6.0 GHz	LO Drive = +5 dBm RF Level = - 10 dBm	dB	22.0 20.0	—
R - I Isolation	4700 MHz 4.7 - 6.0 GHz	LO Drive = +5 dBm RF Level = - 10 dBm	dB	9.4 7.5	—
LO VSWR	4700 MHz 4.7 - 6.0 GHz	LO Drive = +5 dBm RF Level = - 10 dBm	— —	2.7 2.8	—
RF VSWR	4700 MHz 4.7 - 6.0 GHz	LO Drive = +5 dBm RF Level = - 10 dBm	— —	2.3 3.1	—
IF VSWR	DC - 1050 MHz	LO Drive = +5 dBm IF Level = - 10 dBm	— —	1.1 —	—
Input IP3	4700 MHz 4.7 - 6.0 GHz	LO Drive = +3→+7 dBm RF = -10 dBm, IF = 60 MHz	dBm	7.5 8.1	—
Input 1 dB Compression	4700 MHz 4.7 - 6.0 GHz	LO Drive = +3→+7 dBm RF = -10 dBm, IF = 60 MHz	dBm	+1.6 +1.5	—
IF 1 dB Bandwidth	DC - 1050 MHz	LO = 4650 MHz @+5dBm	MHz	—	—

Specifications subject to change without notice.

V 3.0


■ North America: Tel. (800) 366-2266, Fax (800) 618-8883  
 ■ Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298  
 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

tyco / Electronics





Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.


Typical Performance Curves

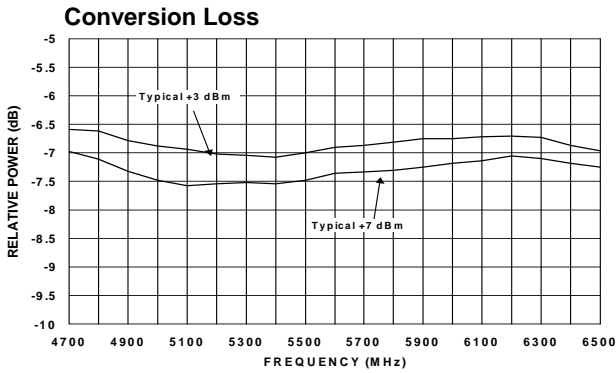

IP3 and 1 dB Compression

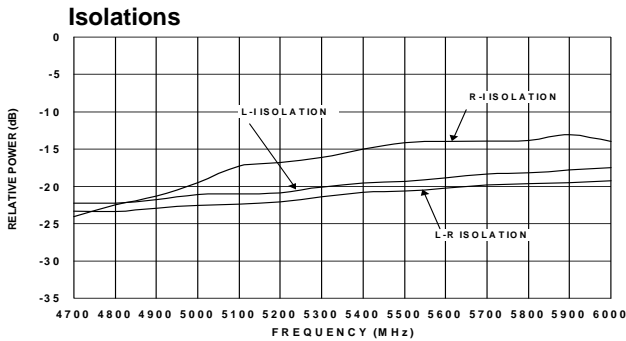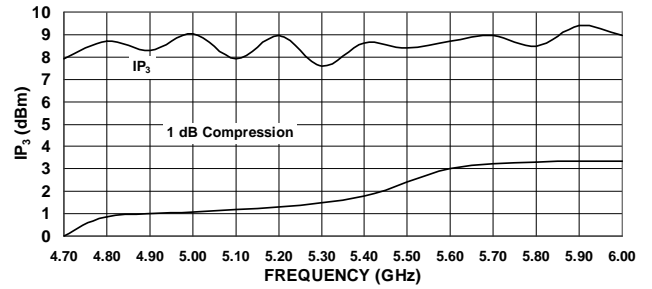

VSWR

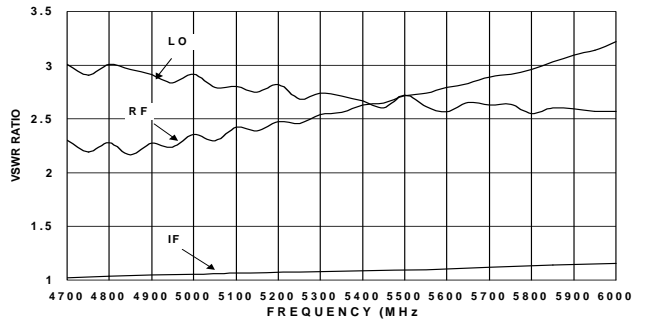


Absolute Maximum Rating<sup>1</sup>

Parameter	Maximum Ratings
Operating Temperature	-65°C to +125°C
Storage Temperature	-65°C to +150°C
Incident LO Power	+20 dBm
Incident RF Power	+20 dBm
Mounting Temperature	+235°C for 10 seconds


1. Exceeding these limits may cause permanent damage.

Schematic

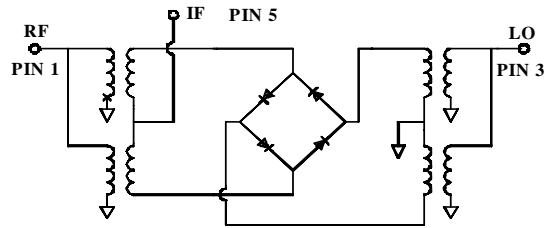

Case Style

SOT-25

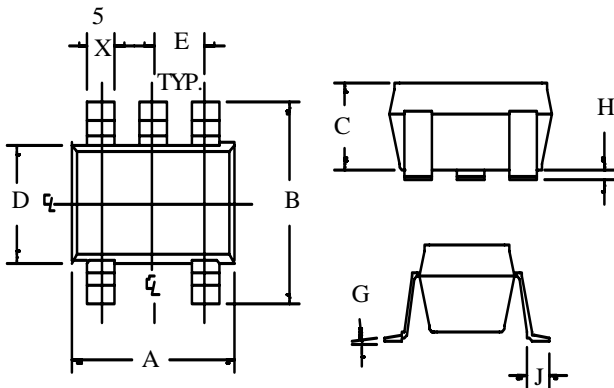

SOT-25<sup>1</sup>

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1103	0.1181	2.8	3.10
B	0.1023	0.1181	2.6	3.00
C	0.0355	0.0512	0.9	1.30
D	0.0591	0.0669	1.5	1.7
E	0.0374 Typ.		0.95 Typ.	
F	0.0138	0.0197	0.35	0.5
G	0.0031	0.0079	0.08	0.20
H	0.0020	0.0059	0.05	0.15
J	0.0138	0.0216	0.35	0.55

1. Lead Coplanarity should be 0.003 (0.08) max.

Specifications subject to change without notice.

V 3.0

■ North America: Tel. (800) 366-2266, Fax (800) 618-8883  
 ■ Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298  
 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

