

# 1:1 Transmission line Transformer

Rev B

## 4.5 - 3000 MHz



# MABACT0010

### Features:

- Surface Mount
- 1:1 Impedance
- Available on tape & reel

### Description

M/A Com's MABACT0010 is a 1:1 RF Transmission Line transformer in a low cost surface mount package. It is ideally suited for high volume CATV/ Broadband applications.

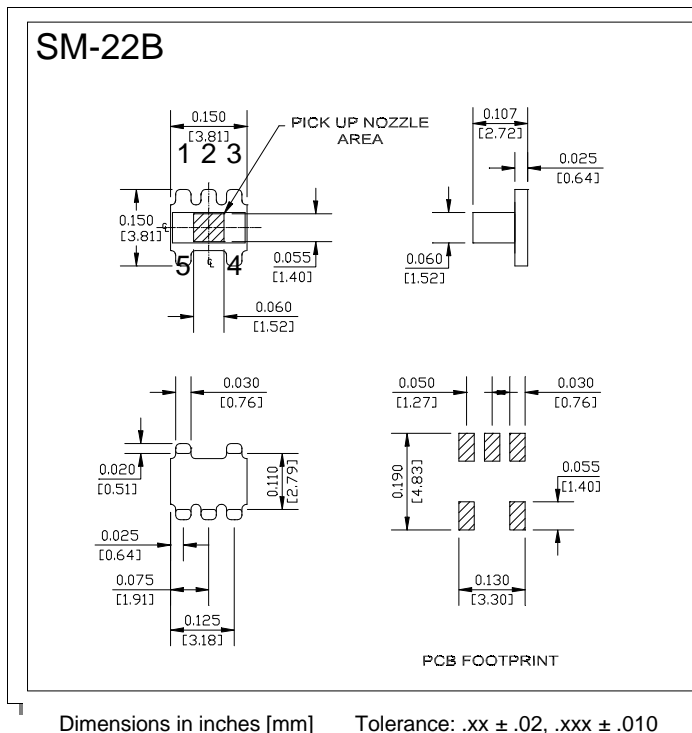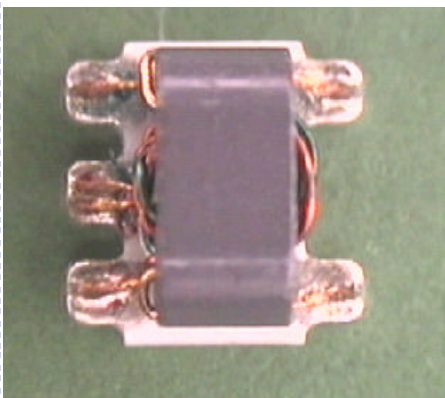

### Ordering Information

Part Number	Package
MABACT0010	Tape & Reel

### Electrical Specifications: 25°C, Impedance = 75 Ohms

Parameter	Frequency (MHz)	Units	Minimum	Typical	Maximum
Frequency Range	4.5 - 3000				
Insertion Loss	4.5-1000	dB	-	0.8	1.0
Insertion Loss	1000-2000	dB	-	1.6	2.0
Insertion Loss	2000-3000	dB	-	2.5	3.5
Amplitude Unbalance	4.5-1000	dB	-	0.5	1.0
Phase Unbalance	4.5-1000	°	-	10	20

**1:1 Transmission line Transformer, 4.5-3000MHz** **MABACT0010**


**Absolute Maximum Ratings**

Parameter	Maximum
RF input power	250mW
DC current	30mA
Operating temperature	-40°C - +85°C
Storage temperature	-40°C - +85°C


**Pin Configuration**

Function	Pin #
Secondary	1
Not Connected	2
Secondary Dot	3
Primary Dot	4
Primary	5


**Schematic**

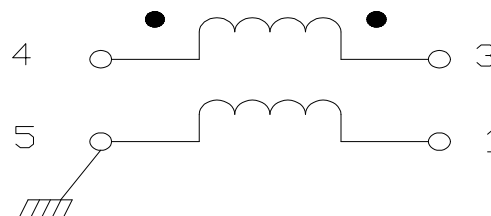


**Insertion Loss Port**

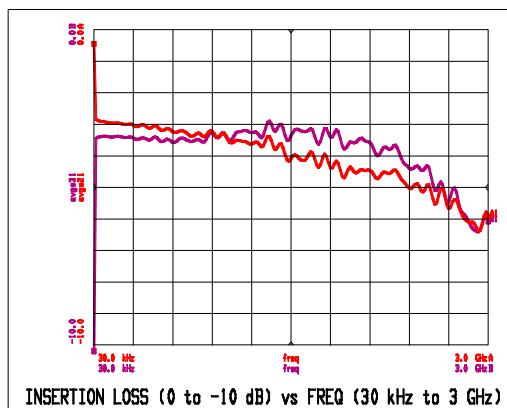


**Input Impedance**

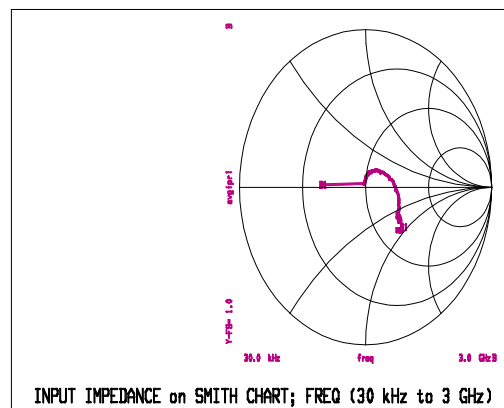

**Amplitude Unbalance**

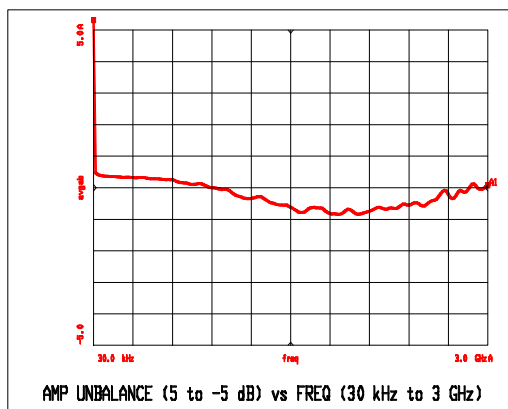

**Phase Unbalance**

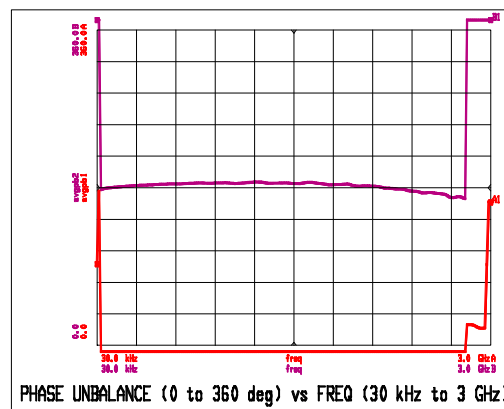

Specification subject to change without notice.

North America: (800) 366-2266

Asia/Pacific: +81-44-844-8296

Europe: +44 (1344) 869 595

Visit [www.macom.com](http://www.macom.com) for additional datasheets and information.

