

MAC218





Triacs Silicon Bidirectional Thyristors

Triacs are designed primarily for full-wave ac control applications, such as light dimmers, motor controls, heating controls and power supplies.

- Blocking Voltage to 800 Volts
- Glass Passivated Junctions for Greater Parameter Uniformity and Stability
- TO-220 Construction Low Thermal Resistance, High Heat Dissipation and Durability
- Gate Triggering Guaranteed in Three Modes (MAC218 Series) or Four Modes (MAC218A Series)

ON Semiconductor®

<http://onsemi.com>



CASE 221A-04
(TO-220AB)
STYLE 4

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted.)

Rating	Symbol	Value	Unit
Peak Repetitive Off-State Voltage ⁽¹⁾ (Gate Open, T _J = 25 to 125°C) MAC218-4, MAC218A4 MAC218-6, MAC218A6 MAC218-8, MAC218A8 MAC218-10, MAC218A10	V _{DRM}	200 400 600 800	Volts
On-State Current RMS (Conduction Angle = 360°, T _C = +80°C)	I _{T(RMS)}	8	Amps
Peak Non-repetitive Surge Current (One Full Cycle, 60 Hz, T _C = 80°C, preceded and followed by rated current)	I _{TSM}	100	Amps
Fusing Current (t = 8.3 ms)	I ² t	40	A ² s
Peak Gate Power (T _C = +80°C, Pulse Width = 2 μs)	P _{GM}	16	Watts
Average Gate Power (T _C = +80°C, t = 8.3 ms)	P _{G(AV)}	0.35	Watt
Peak Gate Trigger Current (Pulse Width = 1 μs)	I _{GTM}	4	Amps
Operating Junction Temperature Range	T _J	-40 to +125	°C
Storage Temperature Range	T _{stg}	-40 to +150	°C

1.. V_{DRM} for all types can be applied on a continuous basis. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

MAC218

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.2	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}C$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
Peak Blocking Current ($V_D = \text{Rated } V_{DRM}$, gate open) $T_J = 25^{\circ}C$ $T_J = 125^{\circ}C$	I_{DRM}	— —	— —	10 2	μA mA
Peak On-State Voltage (Either Direction) ($I_{TM} = 11.3 A$ Peak; Pulse Width = 1 to 2 ms, Duty Cycle < 2%)	V_{TM}	—	1.7	2	Volts
Gate Trigger Current (Continuous dc) ($V_D = 12 V_{dc}$, $R_L = 12\Omega$) Trigger Mode MT2(+), Gate(+); MT2(+), Gate(-); MT2(-), Gate(-) MT2(-), Gate(+) "A" SUFFIX ONLY	I_{GT}	— —	— —	50 75	mA
Gate Trigger Voltage (Continuous dc) (Main Terminal Voltage = 12 Vdc, $R_L = 100$ Ohms) MT2(+), G(+) MT2(+), G(-) MT2(-), G(-) MT2(-), G(+) "A" SUFFIX ONLY (Main Terminal Voltage = Rated V_{DRM} , $R_L = 10 k\Omega$, $T_J = +125^{\circ}C$) MT2(+), G(+); MT2(-), G(-); MT2(+), G(-) MT2(-), G(+) "A" SUFFIX ONLY	V_{GT}	— — — — 0.2 0.2	0.9 0.9 1.1 1.4 — —	2 2 2 2.5 — —	Volts
Holding Current (Either Direction) ($V_D = 24 V_{dc}$, Gate Open, Initiating Current = 200 mA)	I_H	—	—	50	mA
Critical Rate of Rise of Commutating Off-State Voltage ($V_D = \text{Rated } V_{DRM}$, $I_{TM} = 11.3 A$, Commutating $di/dt = 4.1 A/ms$, Gate Unenergized, $T_C = 80^{\circ}C$)	$dv/dt(c)$	—	5	—	$V/\mu s$
Critical Rate of Rise of Off-State Voltage ($V_D = \text{Rated } V_{DRM}$, Exponential Voltage Rise, Gate Open, $T_J = 125^{\circ}C$)	dv/dt	—	100	—	$V/\mu s$

FIGURE 1 — CURRENT DERATING

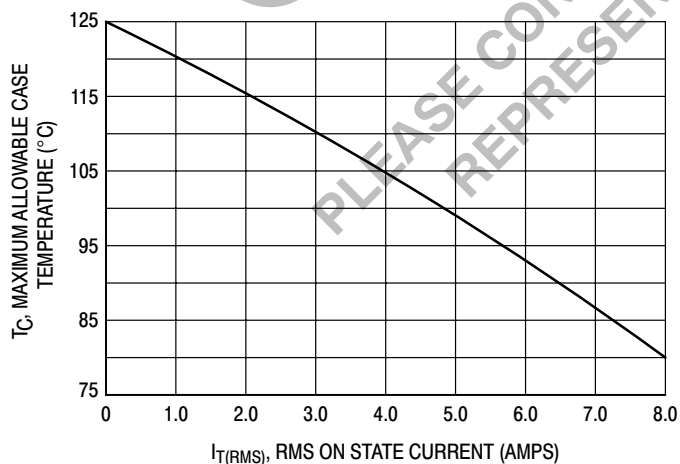


FIGURE 2 — POWER DISSIPATION

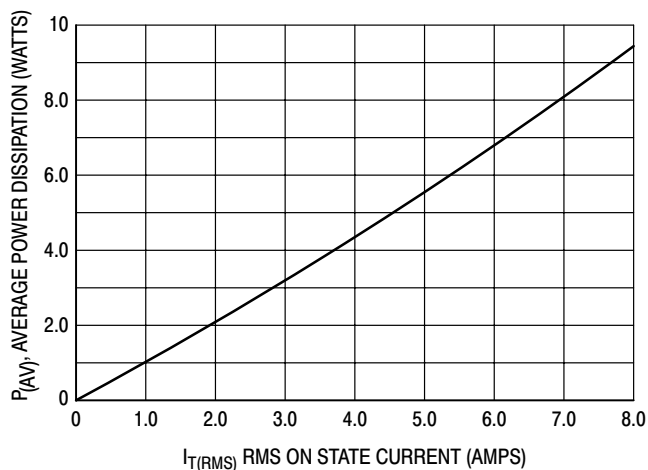


FIGURE 3 — NORMALIZED GATE TRIGGER CURRENT

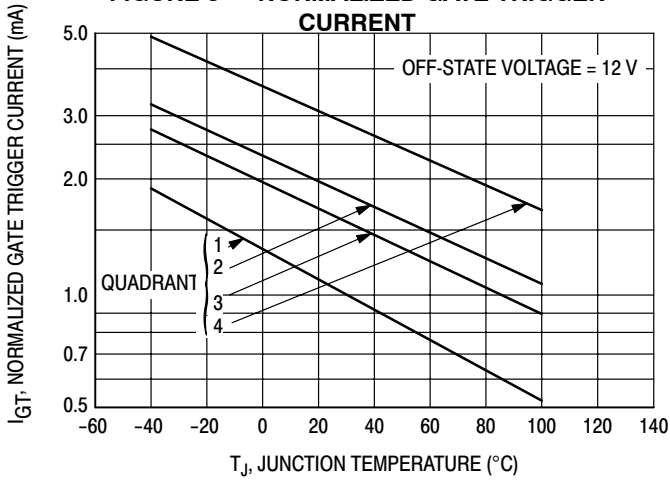


FIGURE 4 — NORMALIZED GATE TRIGGER VOLTAGE


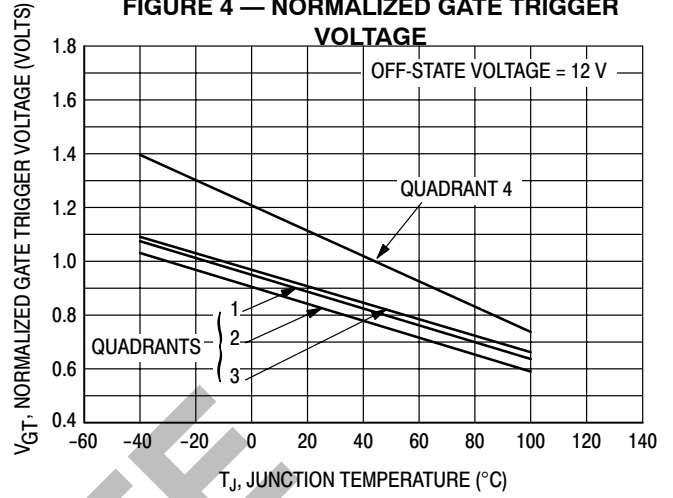




FIGURE 5 — NORMALIZED HOLDING CURRENT

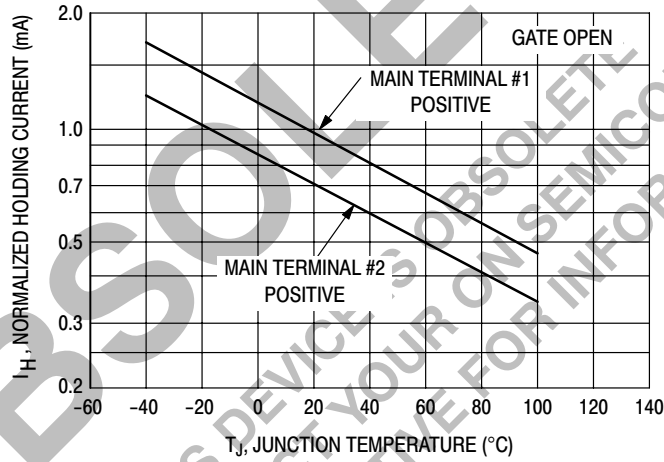

MAC218

PACKAGE DIMENSIONS

CASE 221A-04 (TO-220AB)

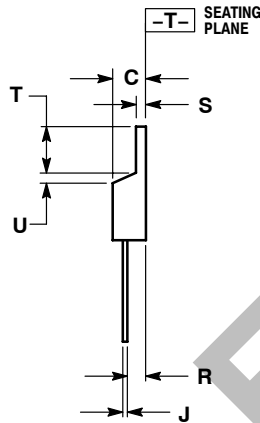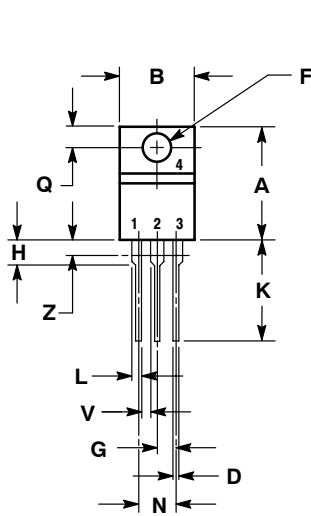

STYLE 4:
PIN 1. MAIN TERMINAL 1
2. MAIN TERMINAL 2
3. GATE
4. MAIN TERMINAL 2

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.66	10.28
C	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
H	0.110	0.155	2.80	3.93
J	0.014	0.022	0.36	0.55
K	0.500	0.562	12.70	14.27
L	0.045	0.055	1.15	1.39
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	---	1.15	---
Z	---	0.080	---	2.04

ON Semiconductor and **ON** are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local Sales Representative