

Miniature Drop-In Dual Isolators

Features


- Replaces industry standard single junction with a dual junction with 25 dB more isolation with only 0.1 dB more insertion loss in the same space
- Designed for Wireless Telecommunication Systems: GSM1800, PCS1900, UMTS2100 (3G)
- High performance at low cost in a miniaturized package.
- Small size, 1" Vs. industry standard of 2"
- Low mass, less than 18 grams vs. industry standard of greater than 36.0 grams.
- The small size utilizes less real estate while providing equal or better RF performance than the industry 2 inch standard for a dual junction isolator.
- Environmentally safe materials used, no lead option available.

Description

M/A-COM's surface mount and drop-in circulators and isolators, designed for wireless Base Station and Power Amplifier applications, feature high reliability performance at a low cost. These proven robust designs are qualification tested. Tests include temperature cycling, high temperature exposure, vibration, shock, and corrosion / moisture testing. These designs feature a low cost package ideally suited for high volume manufacturing. M/A-COM is the world's largest supplier of surface mount and drop-in isolators and circulators for the wireless infrastructure market.

Model Number	Frequency Range
MAFRIN0037	1805 -1880 MHz
MAFRIN0038	1930 - 1990 MHz
MAFRIN0039	2110 -2170 MHz

Outline Drawing

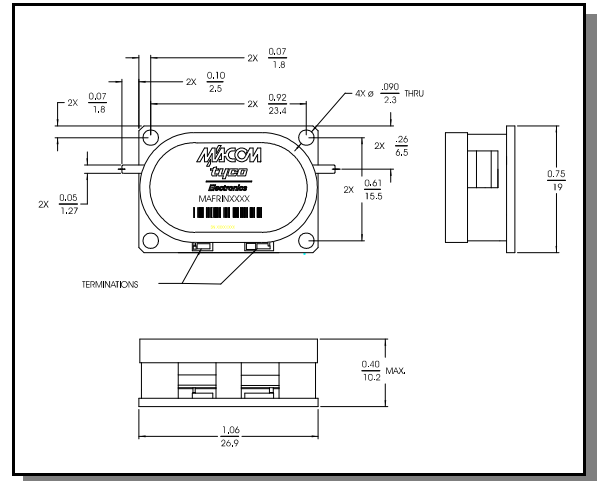

Specifications

Parameter	
Isolation	45 dB Min. 50 dB Typical
Insertion Loss	0.45 Max. 0.35 dB Typical
Forward Power	50 Watts
Reflected Power	30 Watts
VSWR	1.22:1 Max.
Operating Temperature	-10 °C to +70°C

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. MA-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

Visit www.macom.com for additional data sheets and product information.

- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel. +81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020