



MAP9004

High Voltage AC LED Driver

MAP9004 – High Voltage AC LED Driver

General Description

The MAP9004 is LED Driver which has high input voltage ranged from 90V to 270V. It can drive several series LEDs from rectified AC voltage.

The MAP9004 has higher LED current drive capability up to 240mA and the current can be adjustable with external resistors.

The MAP9004 is available in eSOP-8 with Halogen-free (fully RoHS compliant).

For more information, please contact local MagnaChip sales office in world-wide or visit MagnaChip's website.

Features

- Wide operating voltage range
- Higher current drive capability
- Multiple connection for better efficiency, PF & THD
- EMI improvement
- OTP protection
- eSOP-8 package

Applications


- AC LED Driver
- Lighting equipment
- LED Driver Power Supplies

Ordering Information


Part Number	Top Marking	Ambient Temperature Range	Package	RoHS Status
MAP9004ESRH	MAP9004	-30°C to +85°C	eSOP-8	Halogen Free

Simplified Application Circuit

- Single Stage

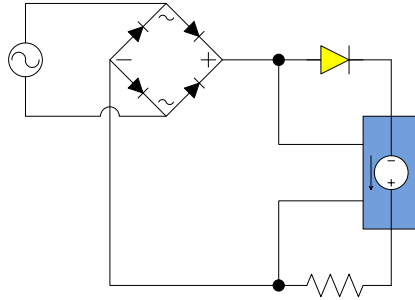


- Multi Stages for Better Efficiency, PF & THD

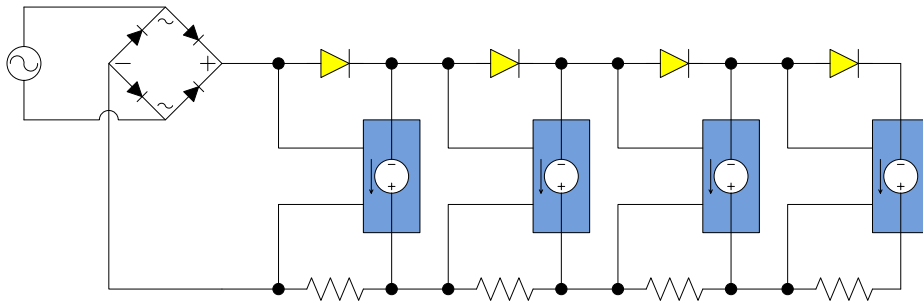

Pin Configuration & Description


- Pin Configuration



- Pin Description

Pin		Descriptions
2	GND	Ground
4	VIN	Voltage input
5	CS	Current sensing
7	OUT	Output

Functional Block Diagram

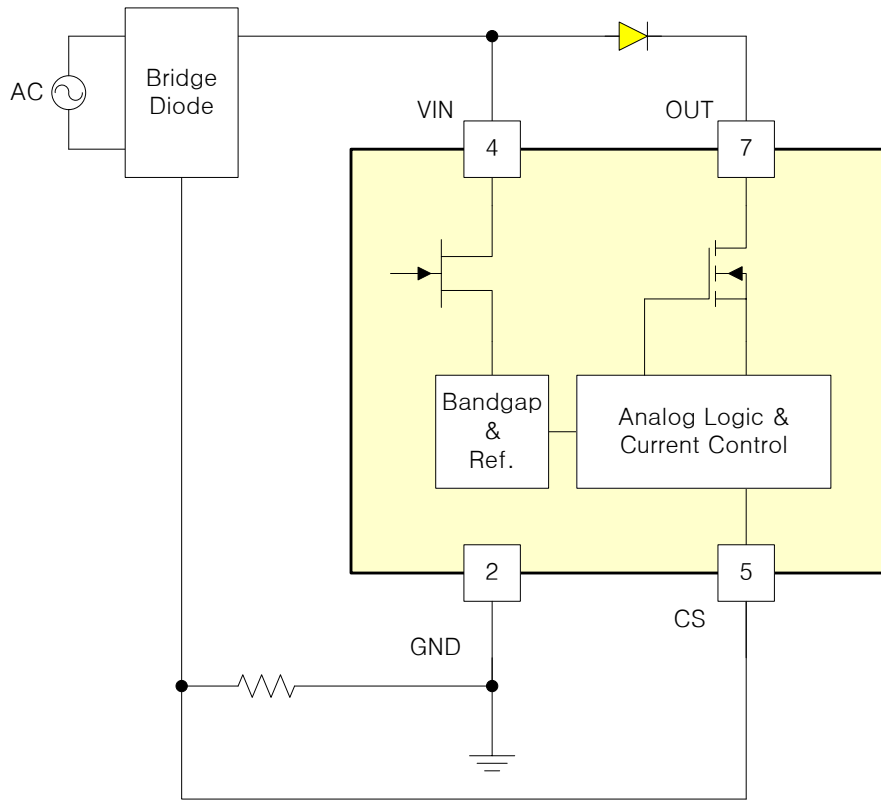

Absolute Maximum Ratings

PARAMETER		VALUE	UNIT
VIN		500	V
OUT		-0.3 ~ 500	V
CS		-6V ~ 0.3	V
Operating Temperature Range		-40 ~ 125	°C
Junction Temperature Range		-40 ~ 150	°C
Storage Temperature Range		-65 ~ 150	°C
Lead temperature(soldering, 10sec)		260	°C
ESD Susceptibility	HBM (Note 1)	4000	V
	MM (Note 2)	400	V
	CDM (Note 3)	2000	V

Note 1: ESD tested per JESD22A-114.

Note 2: ESD tested per JESD22A-115.

Note 3: ESD tested per JESD22C-101E

Thermal Resistance

PARAMETER		VALUE	UNIT
Thermal Resistance (θ_{JA}) , (Note4)	eSOP-8	71.2	°C/W
Thermal Resistance (θ_{JT}) , (Note5)		26.1	°C/W

Note 4: Multi-layer PCB based on JEDEC standard (JESD51-7, 4Layer PCB)

Note 5: The metal PCB's diameter is 43mm and height is 1.6t




Electrical Characteristics

Ta = 25°C, CS Resistance = 6.8Ω unless otherwise specified


SYMBOL	PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
Supply						
V _{VIN_MIN}	Minimum Startup Voltage				25	V
I _{VIN}	Input current	V _{VIN} = 200V, V _{GND} = 0V	150	350	700	uA
Driver Section						
I _{D Leak}	Driver leakage current	V _{VIN} = 200V, V _{GND} = 0V, OUT = 400V	-	-	10	uA
I _{OUT}	Driver current	V _{VIN} = 200V, OUT = 40V	180	185	190	mA
OTP Section						
OTP	Over temperature protection		150	-	-	°C

Note 6: Stress beyond the maximum ratings listed above may incur permanent damage to the device. Operating above the recommended conditions for extended time may stress the device and affect device reliability. Also the device may not operate normally above the recommended operating conditions. These are stress ratings only.

Typical Operating Characteristics

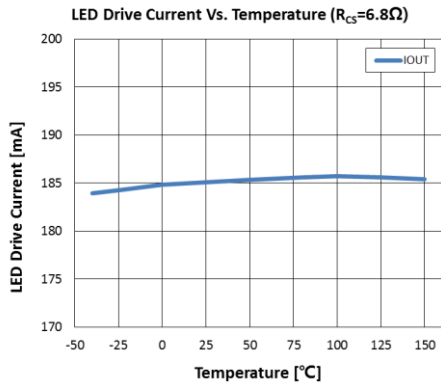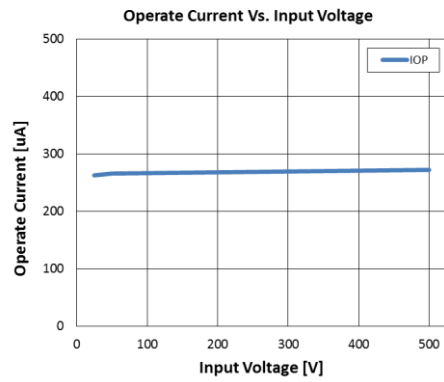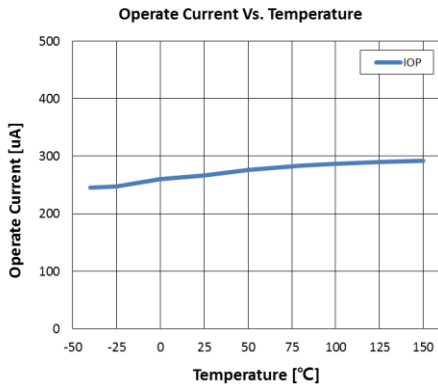

Physical Dimensions

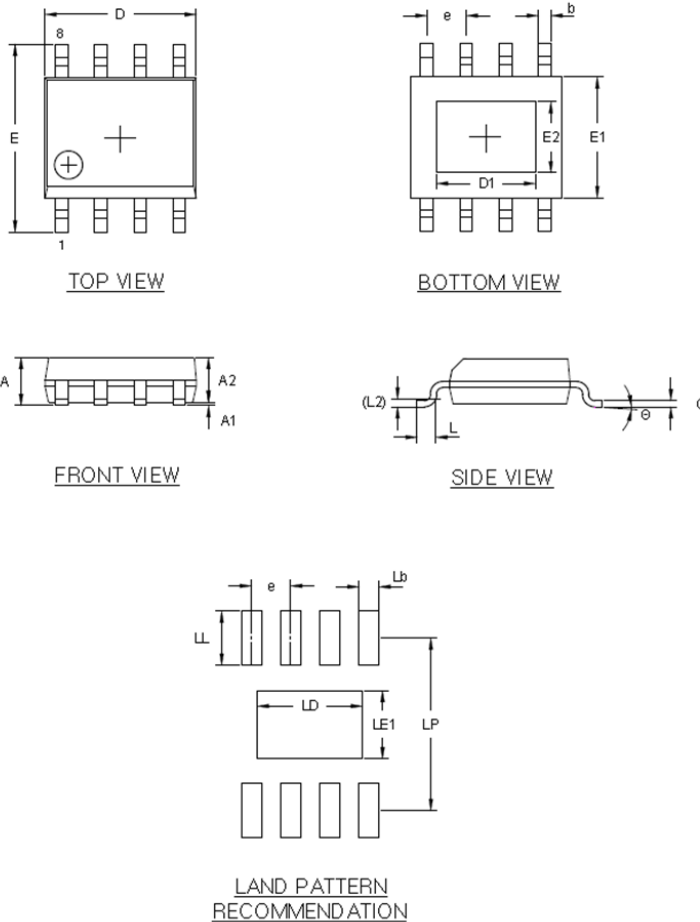

Symbol	Dimension [mm]	
	min	max
A	-	1.70
A1	0.00	0.15
A2	1.25	-
b	0.31	0.51
c	0.10	0.25
D	4.90 BSC	
D1	2.95	3.35
E	6.00 BSC	
E1	3.90 BSC	
E2	2.05	2.45
e	1.27 BSC	
θ	0°	8°
L	0.40	1.27
L2	0.25(GAUGE PLANE)	
Lb	0.60	
LD	3.40	
LE	2.20	
LL	1.75	
LP	5.60	

MagnaChip Semiconductor Ltd. doesn't not recommend the use of its products in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.
MagnaChip reserves the right to change the specifications and circuitry without notice at any time. **MagnaChip** does not consider responsibility for use of any circuitry other than circuitry entirely included in a **MagnaChip** product.

MagnaChip is a registered trademark of MagnaChip Semiconductor Ltd.

MagnaChip Semiconductor Ltd.

891, Daechi-Dong, Kangnam-Gu, Seoul, 135-738 Korea
 Tel : 82-2-6903-3451 / Fax : 82-2-6903-3668 ~9

www.magnachip.com