




MB22S THRU MB220S



Surface Mount Glass Passivated Bridge Rectifier



MBS



Features

- Schottky Barrier Chip
- Low Power Loss, High Efficiency
- Ideally Suited for Automatic Assembly
- Surge Overload Rating to 50A Peak
- Plastic Case Material has UL Flammability Classification Rating 94V-0

Mechanical Data

- Case: MBS, molded plastic
- Terminals: plated leads solderable per MIL-STD-202, Method 208
- Polarity: as marked on case
- Mounting position: Any
- Marking: type number
- Lead Free: For RoHS / Lead Free Version,

Ordering Information

Part No.	Remark	Package	Packing
MB22S THRU MB220S	General	MBS	3000 / Tape & Reel
MB22S THRU MB220S-H	Halogen Free		

Maximum Ratings and Electrical Characteristics (T_A=25°C unless otherwise noted)

Parameter	Symbol	MB 22S	MB 23S	MB 24S	MB 245S	MB 25S	MB 26S	MB 28S	MB 210S	MB 215S	MB 220S	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	20	30	40	45	50	60	80	100	150	200	V
RMS Reverse Voltage	V _{RMS}	14	21	28	31	35	42	56	70	105	140	
DC Blocking Voltage	V _{DC}	20	30	40	45	50	60	80	100	150	200	
Average forward rectified current @ T _A = 90°C (Note 1)	I _F	2.0										A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50										A
I ² t Rating for Fusing (t < 8.3ms)	I ² t	10.375										A ² s
Forward Voltage per element	V _{FM}	0.55			0.7		0.85		0.9			V
At Rated DC Blocking Voltage @ T _A = 25°C Peak Reverse Current @ T _A = 100°C	I _R	0.1 10					0.05 5					mA
Typical Junction Capacitance per leg	C _J	28										pF
Typical Thermal Resistance per leg (Note 2)	R _{θJA}	75										°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-55~+150										°C

Notes:

1. Mounted on aluminum substrate PC board with 1.3mm² solder pad.
2. Thermal Resistance From Junction to Ambient



Surface Mount Glass Passivated Bridge Rectifier

Rating and Characteristics Curves

FIG. 1- FORWARD CURRENT DERATING CURVE

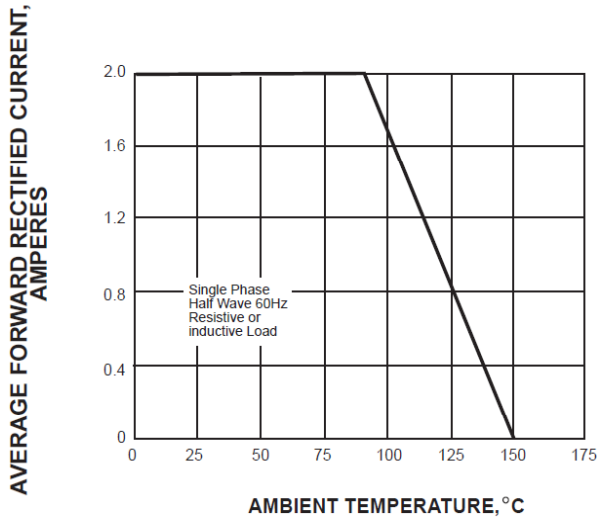


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

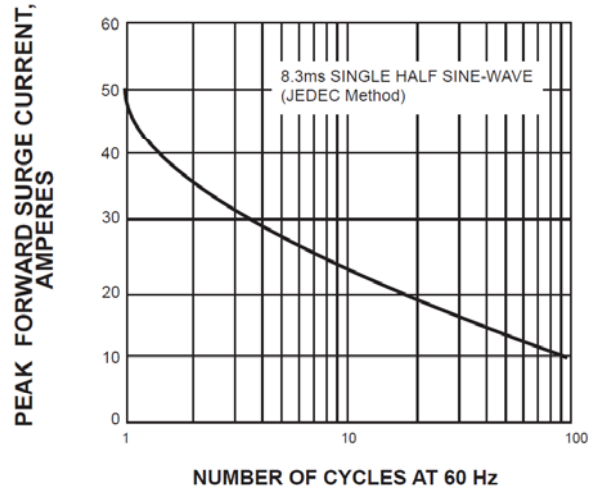


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

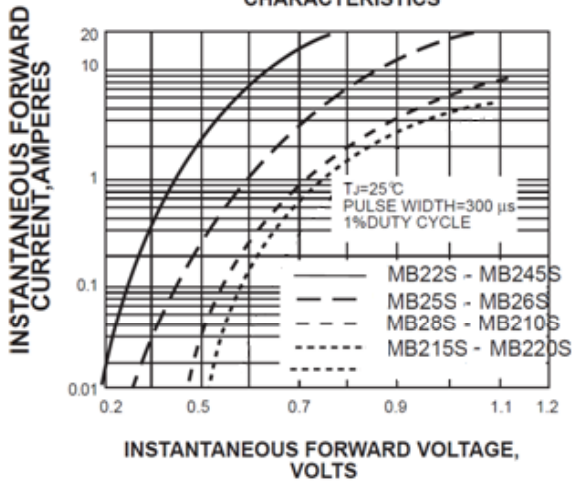


FIG. 4-TYPICAL REVERSE CHARACTERISTICS


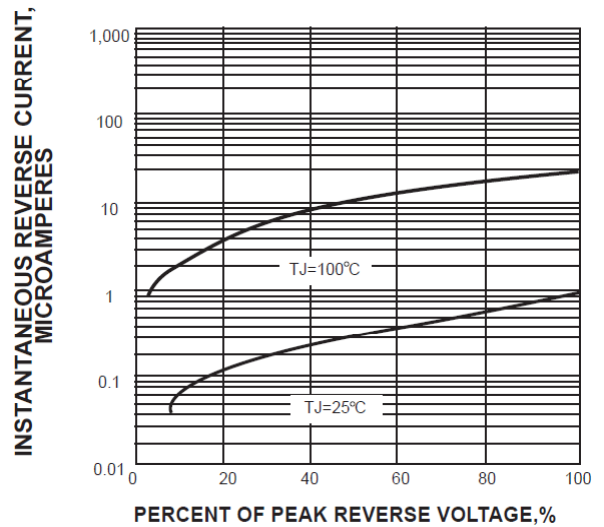


FIG. 5-TYPICAL TRANSIENT THERMAL IMPEDANCE






MB22S THRU MB220S

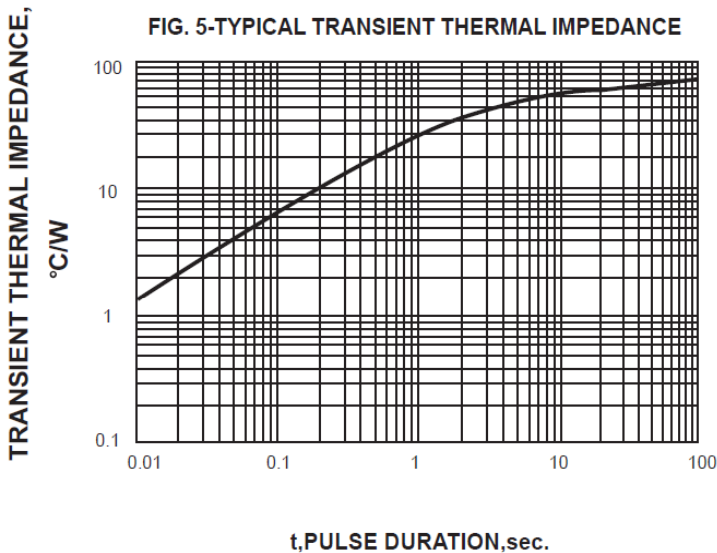

Surface Mount Glass Passivated Bridge Rectifier

Package Outline Dimensions

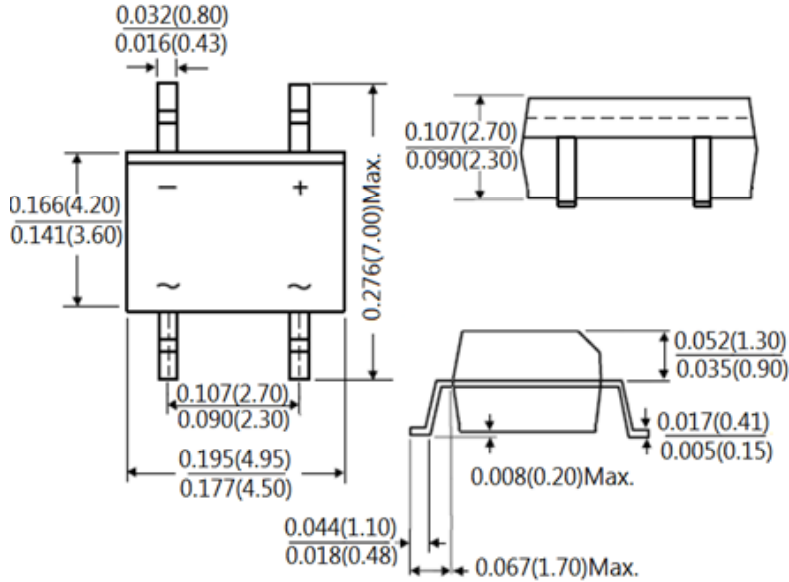


MBS

Dimensions in inches




Suggested Pad Layout

Dimension	Outline	MBS
	millimeters	
A		6.00
C		0.90
D		1.84
E		2.40



Tape & Reel Specification

ITEM	SYMBOL	MBS (mm)
Carrier width	A	5.02±0.10
Carrier length	B	7.22±0.10
Carrier depth	C	2.88±0.10
Sprocket hole	d	1.55±0.05
Reel outside diameter	D	330±1.0
Feed hole diameter	D0	13.0±0.50
Reel inner diameter	D1	100±0.5
Sprocket hole position	E	1.75±0.10
Punch hole position	F	5.50±0.05
Sprocket hole pitch	P	8.0±0.10
Sprocket hole pitch	P0	4.0±0.1
Embossment center	P1	2.0±0.05
Overall tape thickness	T	0.27±0.03
Tape width	W	12.0±0.10
Reel width	W1	12.4+0.5/-0

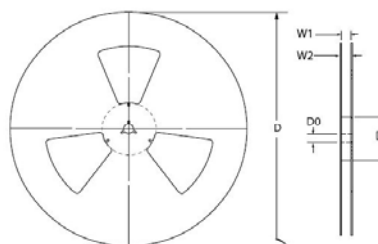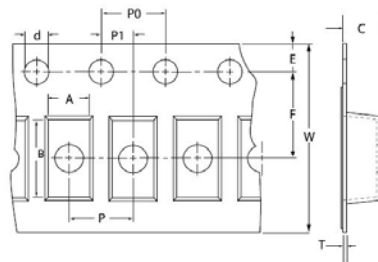



LEGAL DISCLAIMER

- The product is provided “AS IS” without any guarantees or warranty. In association with the product, Eris Technology Corporation, its affiliates, and their directors, officers, employees, agents, successors and assigns (collectively, the “Eris”) makes no warranties of any kind, either express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, of title, or of non-infringement of third party rights.
- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Eris. Eris assumes no responsibility for any errors that may appear in this document.
- Eris does not assume any liability arising out of the application or use of this document or any product described herein, any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Eris and all the companies whose products are represented on Eris website, harmless against all damages.
- No license, express or implied, by estoppels or otherwise, to any intellectual property is granted by this document or by any conduct of Eris. Product name and markings notes herein may be trademarks of their respective owners.
- Eris does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- Should Customers purchase or use Eris products for any unintended or unauthorized application, Customers shall indemnify and hold Eris and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.
- The official text is written in English and the English version of this document is the only version endorsed by Eris. Any discrepancies or differences created in the translations are not binding and have no legal effect on Eris for compliance or enforcement purposes.