

MBR030 MBR040



MOTOROLA

Advance Information



SWITCHMODE RECTIFIERS

... designed for use in switching power supplies, inverters, and as free wheeling diodes, these devices have the following features:

- Low Forward Voltage
- Low Leakage Current
- DO-204AH (DO-35) Glass Package

SCHOTTKY RECTIFIERS

0.5 AMPERE
30-40 VOLTS

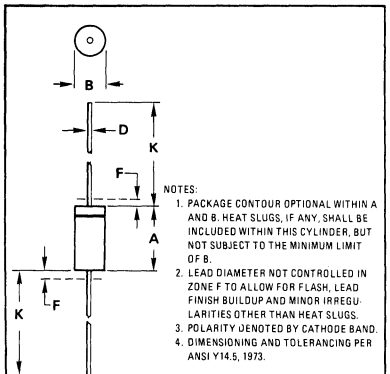

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	3.05	5.08	0.120	0.200
B	1.52	2.29	0.060	0.090
D	0.46	0.56	0.018	0.022
F	-	1.27	-	0.050
K	25.40	38.10	1.000	1.500

All JEDEC dimensions and notes apply.

**CASE 299-02
DO-204AH (DO-35)**

MAXIMUM RATINGS

Rating	Symbol	MBR030	MBR040	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	40	Volts
Average Rectified Forward Current (Rated V_R) $T_L = 75^\circ\text{C}$, $L = 3/8"$ $T_A = 50^\circ\text{C}$, $L = 3/8"$, (Mt. Method #1)	$I_F(AV)$	0.5		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	5.0		Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	-65 to +150		

THERMAL CHARACTERISTICS

Characteristic	Symbol	Typ	Max	Unit
Thermal Resistance, Junction to Lead = $3/8"$	$R_{\theta JL}$	180	190	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Typ	Max	Unit
Instantaneous Forward Voltage (1) ($i_F = 0.1 \text{ A}$, $T_J = 25^\circ\text{C}$) ($i_F = 0.5 \text{ A}$, $T_J = 25^\circ\text{C}$)	v_F	0.460 0.610	0.500 0.650	Volts
Reverse Current (Rated dc Voltage, $T_J = 125^\circ\text{C}$) (Rated dc Voltage, $T_J = 25^\circ\text{C}$)	i_R	0.6 0.003	1.0 0.005	mA

(1) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.
Switchmode is a trademark of Motorola Inc.

This document contains information on a new product. Specifications and information herein are subject to change without notice.

MECHANICAL CHARACTERISTICS

CASE: Glass

FINISH: External leads are plated and are readily solderable

POLARITY: Cathod indicated by polarity band.

WEIGHT: 0.2 Gram (approximately).

MAXIMUM LEAD TEMPERATURE FOR SOLDERING PURPOSES: 230 $^\circ\text{C}$, $1/8"$ from case for 10 seconds.

MBR030, MBR040

FIGURE 1 — TYPICAL FORWARD VOLTAGE

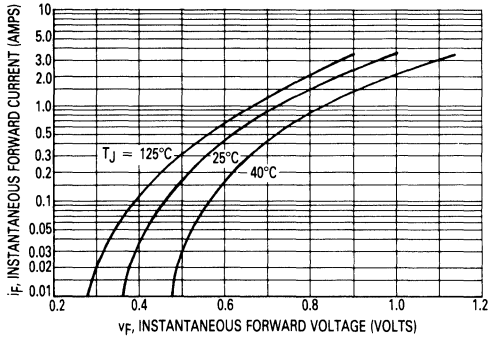


FIGURE 3 — TYPICAL CAPACITANCE

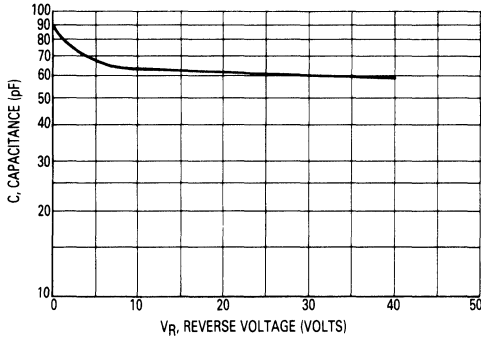


FIGURE 5 — FORWARD POWER DISSIPATION

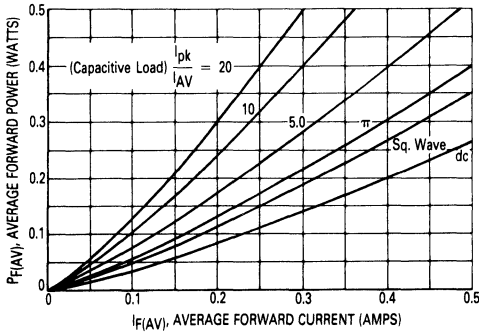


FIGURE 2 — CURRENT DERATING, PRINTED CIRCUIT BOARD MOUNTING


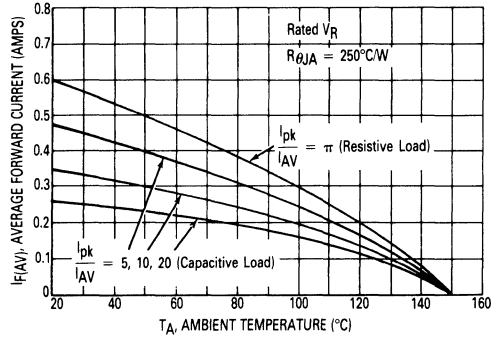


FIGURE 4 — CURRENT DERATING, LEAD TEMPERATURE

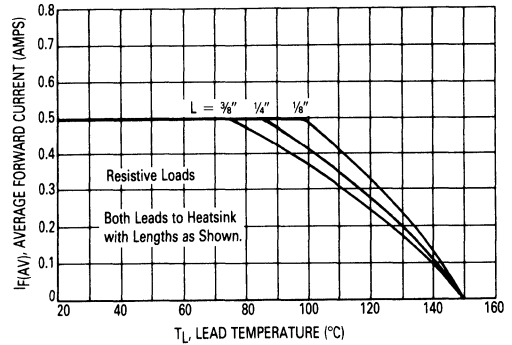


NOTE 1

Data shown for thermal resistance junction-to-ambient (θ_{JA}) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.


TYPICAL VALUES FOR θ_{JA} IN STILL AIR

MOUNTING METHOD	1/8	1/4	3/8	$R_{\theta JA}$
1	200	225	250	$^\circ\text{C/W}$
2	210	235	260	$^\circ\text{C/W}$
3		150		$^\circ\text{C/W}$

MOUNTING METHOD 1



MOUNTING METHOD 2



MOUNTING METHOD 3

