

Schottky Barrier Rectifier

MBR1050CT

FEATURES



- Schottky Barrier Chip
- Low Power Loss/High Efficiency
- High current capability, low forward voltage drop
- High surge capability
- Guardring for overvoltage protection
- High temperature soldering guaranteed
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Designed for low-voltage, high frequency inverters, free wheeling and polarity protection applications .

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{RRM} V _{RWM} V _R	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	50	V
V _{R(RMS)}	RMS Reverse Voltage	35	V
I _{F(AV)}	Average Rectified Forward Current (Rated V _R) T _C = 105°C	10	A
I _{FSM}	Nonrepetitive Peak Surge Current (Surge applied at rated load conditions half-wave, single phase, 60Hz)	125	A
I _{RRM}	Peak Repetitive Reverse Surge Current (20 μ s, 1.0kHz)	1.0	A
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature Range	-65~150	°C
dv/dt	Voltage Rate of Change (Rated V _R)	1000	V/ μ s

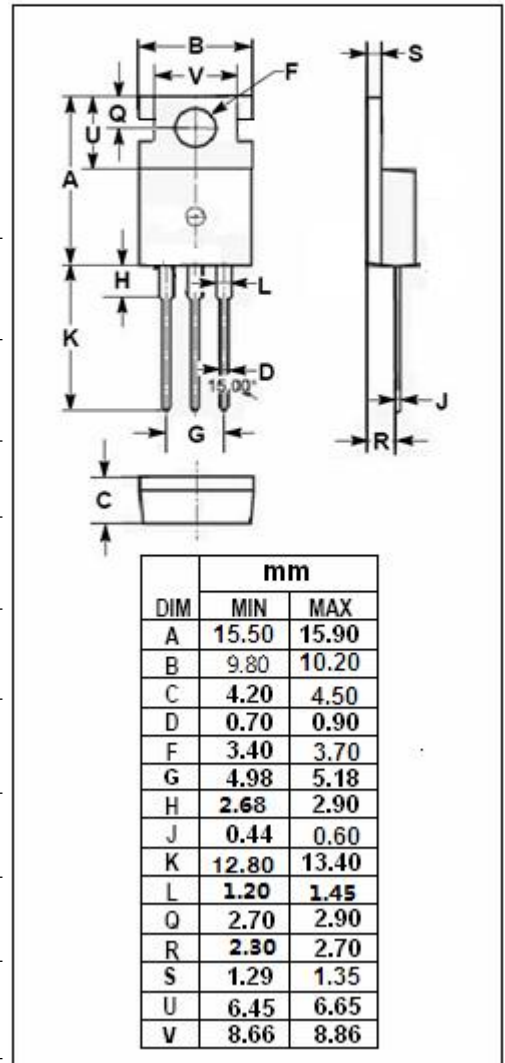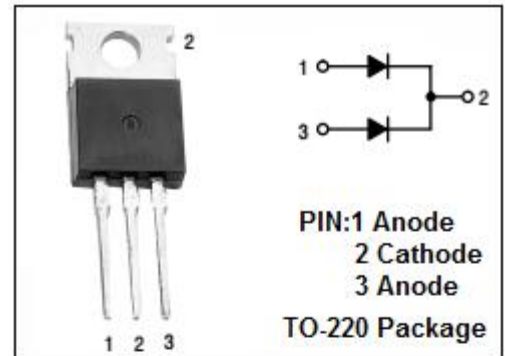

Schottky Barrier Rectifier
MBR1050CT
THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal Resistance, Junction to Case	3.0	°C/W

ELECTRICAL CHARACTERISTICS (Pulse Test: Pulse Width=300 μs, Duty Cycle ≤ 1%)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V _F	Maximum Instantaneous Forward Voltage	I _F = 5A ; T _C = 25°C I _F = 5A ; T _C = 125°C I _F = 10A ; T _C = 25°C	0.80 0.70 0.95	V
I _R	Maximum Instantaneous Reverse Current	Rated DC Voltage, T _C = 25°C Rated DC Voltage, T _C = 125°C	0.1 15	mA

Notice:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.