




肖特基二极管  
反向电压 150~200V  
正向电流 20 A

# MBR20150 ..... MBR20200

Schottky Barrier Reifier  
Reverse Voltage 150 to 200 V  
Forward Current 20 A

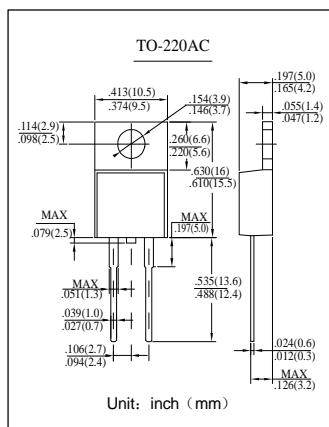

## 特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 低功耗高效率。Low Power Loss, High Efficiency

## 机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded Plastic
- 极性: 标记模压或印于本体 Polarity: Symbols molded or marked on body
- 安装位置: 任意 Mounting Position: Any
- 重量: 2.00 克 Weight: 2.00Grams

**极限值和温度特性** TA = 25°C 除非另有规定。

**Maximum Ratings & Thermal Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	MBR 20150	MBR 20200	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	150	200	V
最大均方根电压 Maximum RMS voltage	V <sub>RMS</sub>	105	140	V
最大直流阻断电压 Maximum DC blocking voltage	V <sub>DC</sub>	150	200	V
最大正向平均整流电流 Maximum average forward reified current	I <sub>F(AV)</sub>	20		A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I <sub>FSM</sub>	150		A
典型热阻 Typical thermal resistance	R <sub>θJC</sub>	3.5		°C/W
工作结温和存储温度 Operating junction and storage temperature range	T <sub>j</sub> , T <sub>STG</sub>	-55 --- +150		°C

**电特性** TA = 25°C 除非另有规定。

**Electrical Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	MBR 20150	MBR 20200	单位 Unit
最大正向电压 Maximum forward voltage	V <sub>F</sub>	0.95	0.99	V
最大反向电流 TA= 25°C Maximum reverse current TA=100°C	I <sub>R</sub>	0.15 150		mA
典型结电容 V <sub>R</sub> = 4.0V, f = 1MHz Type junction capacitance	C <sub>j</sub>	310		pF



南通皋鑫

MBR20150 ..... MBR20200

## 特性曲线 Characteristic Curves

