



# **20.0A SCHOTTKY BARRIER RECTIFIERS -40V- 100V ITO-220 PACKAGE**

**MBR2040FCT**  
**THRU**  
**MBR20100FCT**

## Features

- High Surge Capacity
  - Low Forward Voltage Drop
  - High Current Capability, High Efficiency
  - Marking : type number
  - **Pb-Free package is available**

RoHS product for packing code suffix "G"

Halogen free product for packing code suffix "H"

  - Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1



## Maximum Ratings

- Operating Temperature: -55°C to +150°C
  - Storage Temperature: -55°C to +150°C

Catalog Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR2040FCT	40V	28V	40V
MBR2045FCT	45V	31.5V	45V
MBR2060FCT	60V	42V	60V
MBR20100FCT	100V	70V	100V

## **Electrical Characteristics @ 25°C Unless Otherwise Specified**


Average Forward Current	$I_{F(AV)}$	20 A	$T_A = 120^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	150A	8.3ms, half sine
Maximum Instantaneous Forward Voltage 2040FCT-2045FCT 2060FCT 20100FCT 2040FCT-2045FCT 2060FCT 20100FCT 2040FCT-2045FCT 2060FCT 20100FCT	$V_F$	.70V .80V .85V .84V .95V .95V .72V .85V .85V	$I_{FM} = 10\text{A}; T_A = 25^\circ\text{C}$ $I_{FM} = 20\text{A}; T_A = 25^\circ\text{C}$ $I_{FM} = 20\text{A}; T_A = 125^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage 2040FCT~2045FCT 2060FCT~20100FCT 2040FCT~2045FCT 2060FCT~20100FCT	$I_R$	0.1mA 0.15mA 50mA 150mA	$T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$

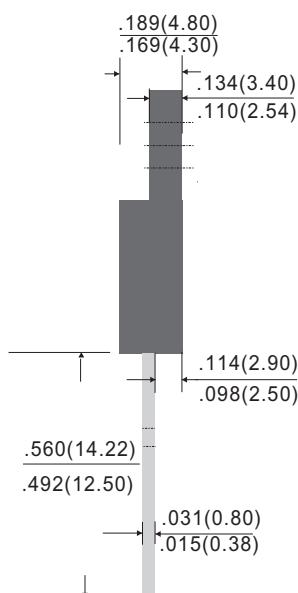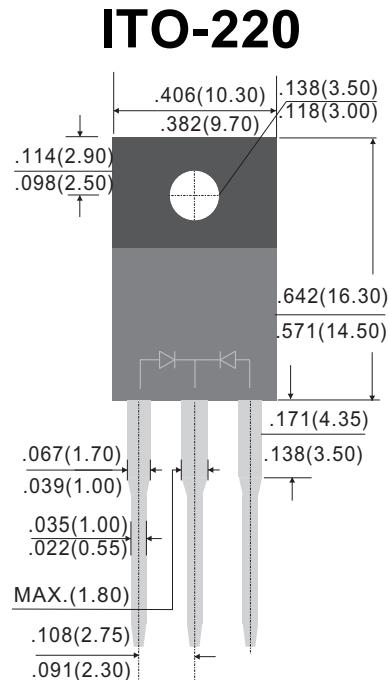

Dimensions in inches and (millimeters)


Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7.

Figure 1  
Typical Forward Characteristics

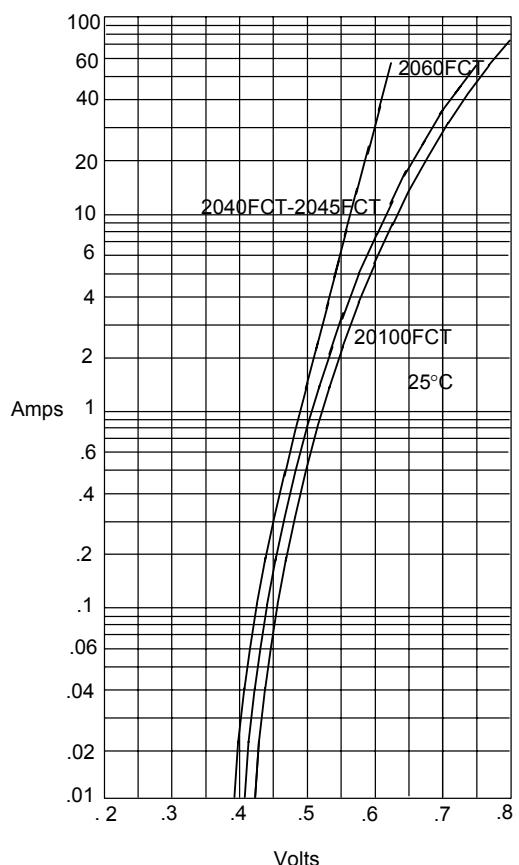


Instantaneous Forward Current - Amperesversus  
Instantaneous Forward Voltage - Volts

Figure 3  
Forward Derating Curve

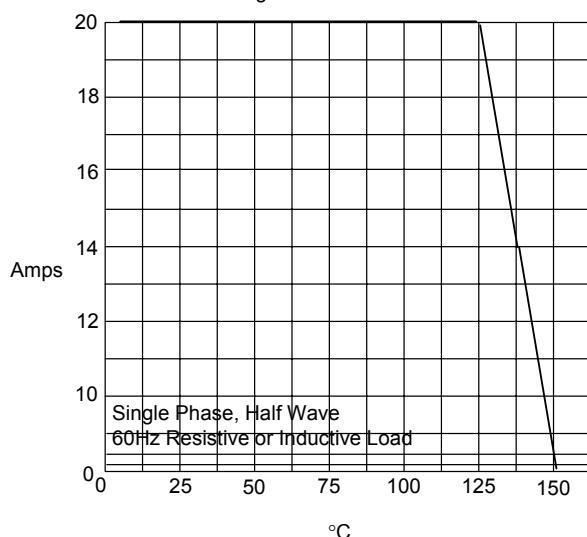


Average Forward Rectified Current - Amperesversus  
Ambient Temperature - °C

Figure 2  
Typical Reverse Characteristics

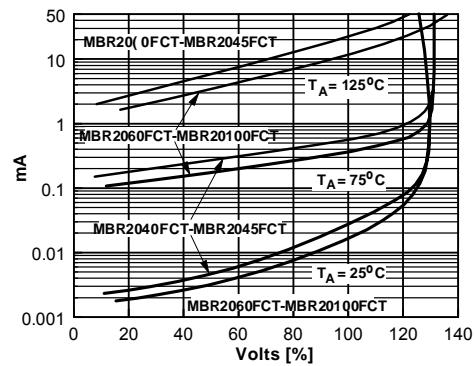

Instantaneous Reverse Leakage Current - mA  
Percent Of Rated Peak Reverse Voltage - Volts%

Figure 4  
Peak Forward Surge Current

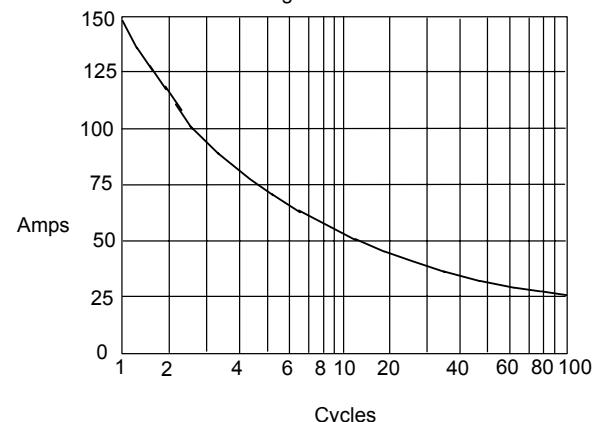

Peak Forward Surge Current - Amperesversus  
Number Of Cycles At 60Hz - Cycles