

Pb Free Plating Product


MBR2045CTR/MBR2060CTR/MBR20100CTR/MBR20200CTR



20 Amperes Heat Sink Dual Common Anode Schottky Half Bridge Rectifiers

- Features**
- ★ Standard MBR matured technology with high reliability
 - ★ Low forward voltage drop
 - ★ High current capability
 - ★ Low reverse leakage current
 - ★ High surge current capability
- Application**
- ★ Automotive Inverters/Solar Inverters
 - ★ Plating Power Supply, SMPS and UPS
 - ★ Car Audio Amplifiers and Sound Device Systems

- Mechanical Data**
- ★ Case: Heatsink TO-220AB
 - ★ Epoxy: UL 94V-0 rate flame retardant
 - ★ Terminals: Solderable per MIL-STD-202 method 208
 - ★ Polarity: As marked on diode body
 - ★ Mounting position: Any
 - ★ Weight: 2.0 gram approximately

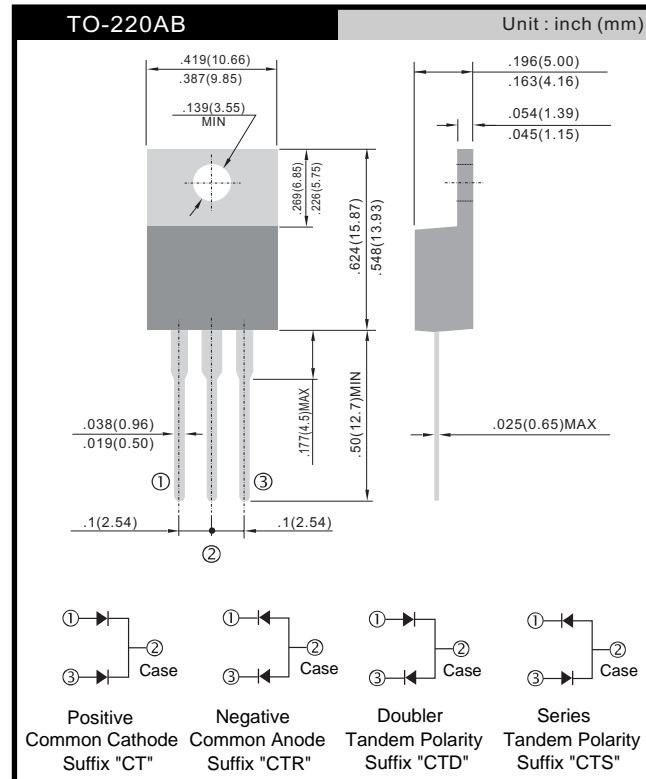

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	MBR2045CTR	MBR2060CTR	MBR20100CTR	MBR20200CTR	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	45	60	100	200	V
Maximum RMS voltage	V _{RMS}	31	42	70	140	V
Maximum DC blocking voltage	V _{DC}	45	60	100	200	V
Maximum average forward rectified current	I _{F(AV)}	20				A
Peak repetitive forward current (Rated VR, Square Wave, 20KHz)	I _{FRM}	20				A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	150				A
Peak repetitive reverse surge current (Note 1)	I _{RRM}	1	0.5			A
Maximum instantaneous forward voltage (Note 2)	V _F	-	0.80	0.85	0.99	V
I _F =10A, T _J =25°C		0.57	0.70	0.75	0.87	
I _F =10A, T _J =125°C		0.84	0.95	0.95	1.23	
I _F =20A, T _J =125°C		0.72	0.85	0.85	1.10	
Maximum reverse current @ rated VR	I _R	0.1				mA
T _J =25 °C T _J =125 °C		15	10	5	0.15	
Voltage rate of change (Rated V _R)	dV/dt	10000				V/μs
Typical thermal resistance	R _{θJC}	1.0		2.0		°C/W
Operating junction temperature range	T _J	- 55 to +150				°C
Storage temperature range	T _{STG}	- 55 to +150				°C

Note 1: tp = 2.0 μs, 1.0KHz

Note 2: Pulse test with PW=300μs, 1% duty cycle

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

FIG. 1- FORWARD CURRENT DERATING CURVE

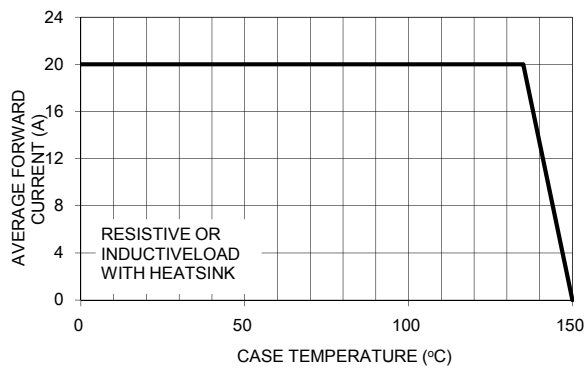


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

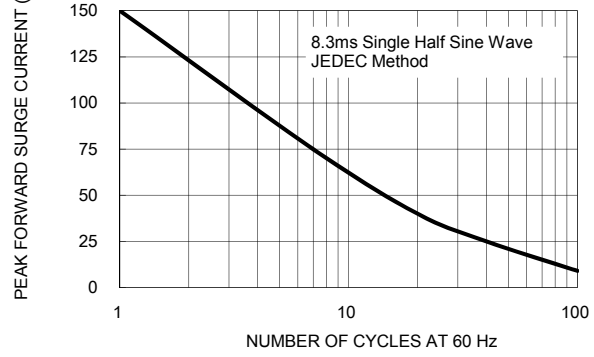


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

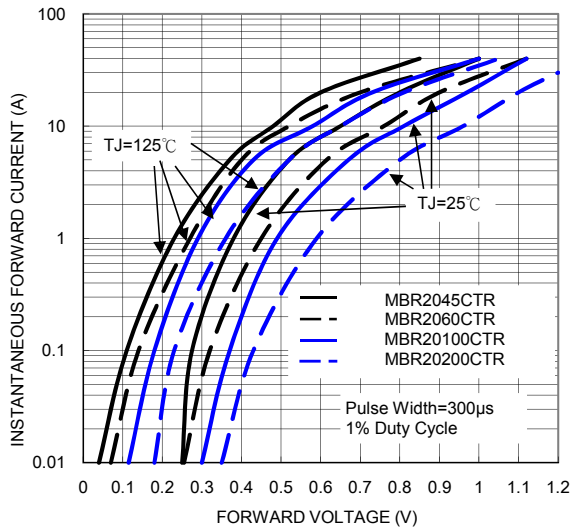


FIG. 4- TYPICAL REVERSE CHARACTERISTICS PER LEG

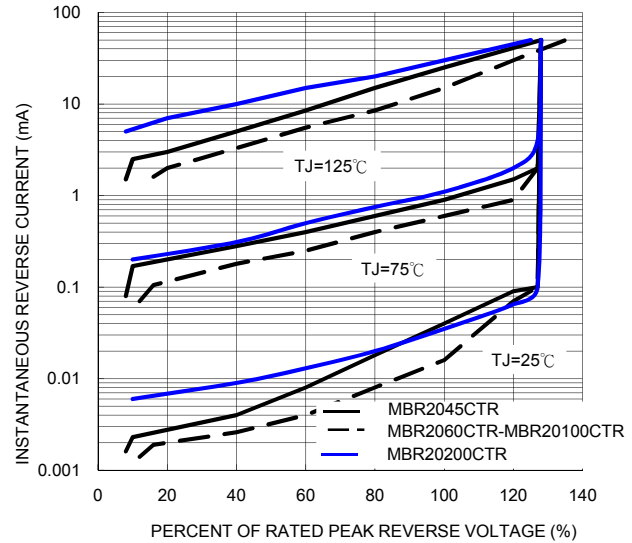


FIG. 5- TYPICAL JUNCTION CAPACITANCE PER LEG

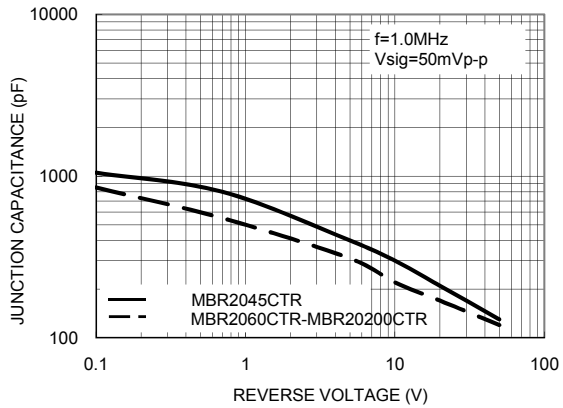


FIG. 6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

