



MBR245

Preliminary

DIODE

2.0A SCHOTTKY BARRIER RECTIFIER

DESCRIPTION


The UTC **MBR245** is a 2.0A schottky barrier rectifier, it uses UTC's advanced technology to provide the customers with high surge capability, high efficiency, high current capability, low power loss and low forward voltage drop, etc.

The UTC **MBR245** is suitable for free wheeling and polarity protection, etc.

FEATURES

- * Low Reverse Current
- * Low Stored Charge, Majority Carrier Conduction
- * Low Power Loss/High Efficiency
- * Highly Stable Oxide Passivated Junction

SYMBOL



ORDERING INFORMATION


Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
MBR245L-SMA-R	MBR245G-SMA-R	SMA	K	A	Tape Reel
MBR245L-Z15-B	MBR245G-Z15-B	DO-15	K	A	Tape Box
MBR245L-Z41-R	MBR245G-Z41-R	DO-41	K	A	Tape Reel
MBR245L-Z41-B	MBR245G-Z41-B	DO-41	K	A	Tape Box

Note: Pin Assignment: A: Anode K: Cathode

 MBR245L-SMA-R	(1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel, B: Tape Box (2) SMA: SMA, Z15: DO-15, Z41: DO-41 (3) L: Lead Free, G: Halogen Free and Lead Free
-------------------	---	--

MARKING

SMA	DO-15 / DO-41
 Cathode Band for uni-directional Only UTC □□□ MBR245□ Date Code L: Lead Free G: Halogen Free	 Cathode Band for uni-directional Only MBR245□ □□□□ L: Lead Free G: Halogen Free Date Code

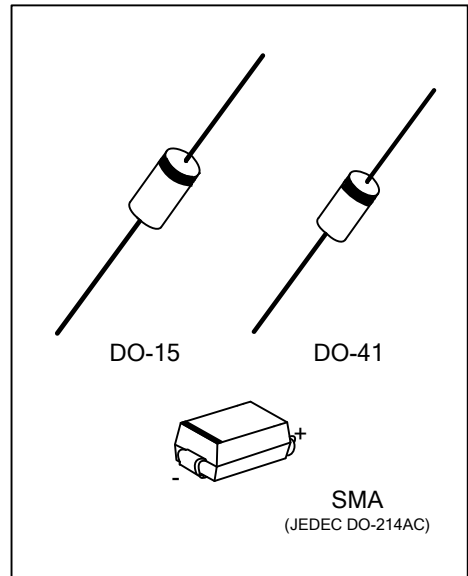

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Peak Repetitive Reverse Voltage	V _{RRM}	45	V
Working Peak Reverse Voltage	V _{RWM}	45	V
DC Blocking Voltage	V _R	45	V
RMS Reverse Voltage	V _{R(RMS)}	31.5	V
Average Rectified Forward Current (Rated VR-20Khz Square Wave) - 50% Duty Cycle	I _O	2.0	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave	I _{FSM}	50	A
Typical Junction Capacitance	C _J	650	pF
Junction Temperature	T _J	-65~+150	°C
Storage Temperature	T _{STG}	-65~+150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	SMA	90	°C/W
	DO-15/DO-41	50	

■ ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Instantaneous Forward Voltage Drop (Note 2)	V _F	I _F =2.0A, T _C =25°C			0.70	V
		I _F =2.0A, T _C =125°C			0.65	
Instantaneous Reverse Current (Note 2)	I _R	Rated DC Voltage, T _C =25°C			500	μA
		Rated DC Voltage, T _C =125°C			20	

Notes: 1. 2.0μs Pulse Width, f = 1.0KHz.

2. Pulse Test: Pulse Width=300μs, Duty Cycle≤ 2.0%.

3. Applied V_R = 4.0V and f = 1.0MHz.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.