



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MBR30150FCT

Features

- Low Power Loss, High Efficiency
- Guardring for overvoltage protection
- Low forward voltage drop
- High frequency operation
- For use in high frequency inverters, free wheeling and polarity protection applications
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Weight: 0.08 ounce, 2.24 grams

Maximum Ratings and Electrical Characteristics


(T_C = 25°C unless otherwise noted)

Parameter	Symbol	MBR30150CT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	150	Volts
Working peak reverse voltage	V _{RWM}	150	Volts
Maximum DC blocking voltage	V _{DC}	150	Volts
Maximum average forward rectified current (See Fig. 1) Total device Per leg	I _{F(AV)}	30 15	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I _{FSM}	260	Amps
Peak repetitive reverse current per leg at t _p = 2.0us, 1KHz	I _{RRM}	1.0	Amp
Voltage rate of change (rated V _R)	dv/dt	10,000	V/us
Maximum instantaneous forward voltage per leg (Note 4) at I _F =15A, T _C =25°C at I _F =15A, T _C =125°C at I _F =30A, T _C =25°C at I _F =30A, T _C =125°C	V _F	0.90 0.75 0.99 0.86	Volt
Maximum reverse current per leg at working peak reverse voltage T _J =25°C T _J =125°C	I _R	5.0 1.0	uA mA
Typical thermal resistance per leg	R _{θJC}	MBR 1.7 / MBRF 4.0	°C/W
RMS isolation voltage (MBRF type only) from terminals to heatsink with t = 1.0 second, RH ≤ 30%	V _{ISOL}	4500 (Note 1) 3500 (Note 2) 1500 (Note 3)	Volts
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C

- Notes:**
1. Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
 2. Clip mounting (on case), where leads do overlap heatsink
 3. Screw mounting with 4-40 screw, where washer diameter is < 4.9 mm (0.19")
 4. Pulse test: 300us pulse width, 1% duty cycle

30 Amp Schottky Barrier Rectifier 150 Volts

ITO-220AB

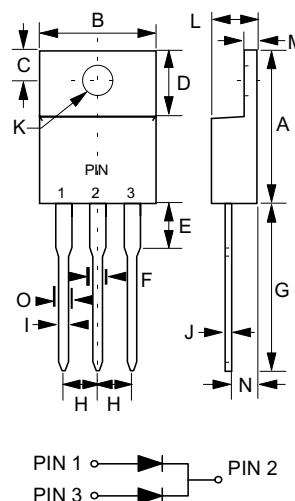

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.580	.600	14.50	15.50	
B	.383	.405	9.72	10.27	
C	.105	.115	2.45	3.15	
D	.248	.272	6.30	6.90	
E	.171	.191	4.35	4.85	
F	---	.060	---	1.52	
G	.530	.560	13.46	14.22	
H	.095	.105	2.41	2.67	
I	.027	.037	0.69	0.94	
J	.014	.022	0.36	0.55	
K	.122	.131	3.08	3.39	Ø
L	.172	.188	4.36	4.77	
M	.100	.110	2.54	2.80	
N	.100	.110	2.54	2.80	

MBR30150FCT

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

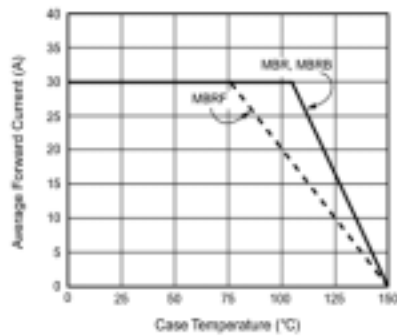


Figure 1. Forward Derating Curve (Total)

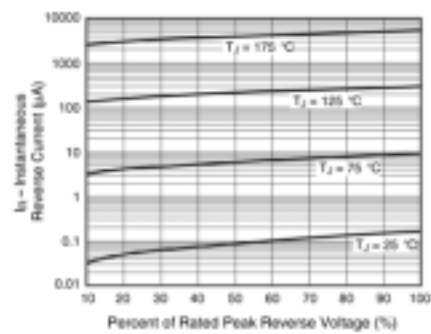


Figure 4. Typical Reverse Characteristics Per Leg

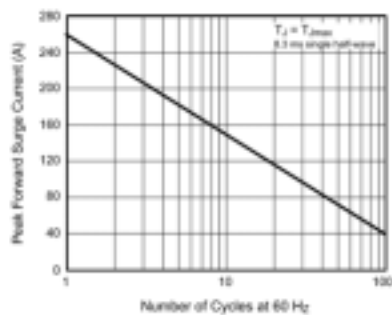


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

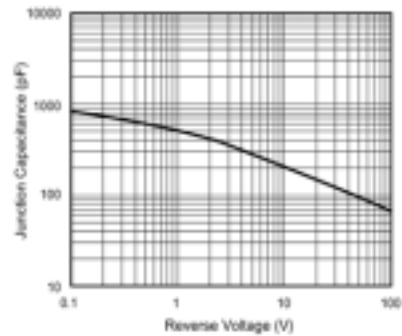


Figure 5. Typical Junction Capacitance Per Leg

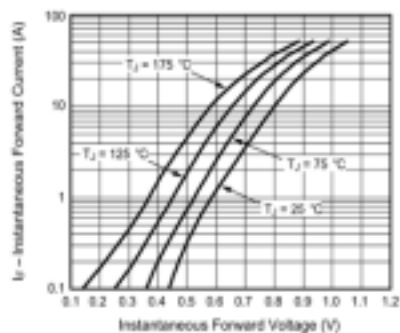


Figure 3. Typical Instantaneous Forward Characteristics Per Leg

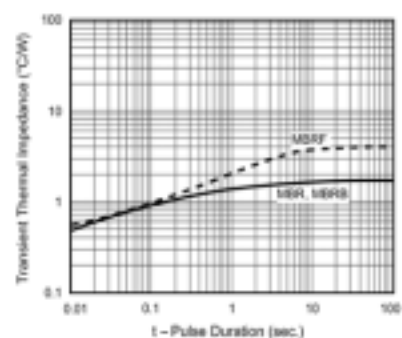


Figure 6. Typical Transient Thermal Impedance Per Leg

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical,
Aerospace or Military Applications.