
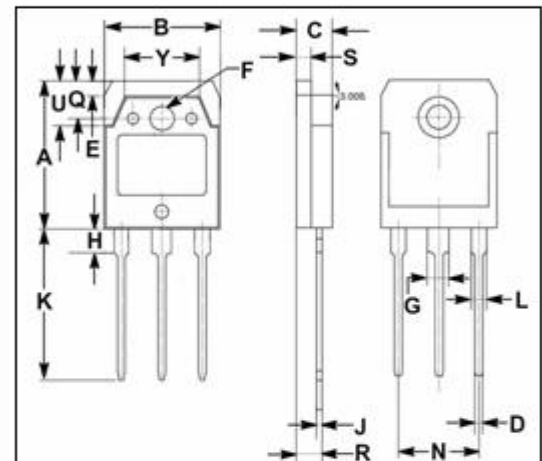


Schottky Barrier Rectifier
MBR6045WT
FEATURES

- Low Forward Voltage
- Guard -Ring for Stress Protection
- High Surge Capability
- 175°C Operating Junction Temperature
- Pb-Free Package is Available
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

MECHANICAL CHARACTERISTICS

- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds

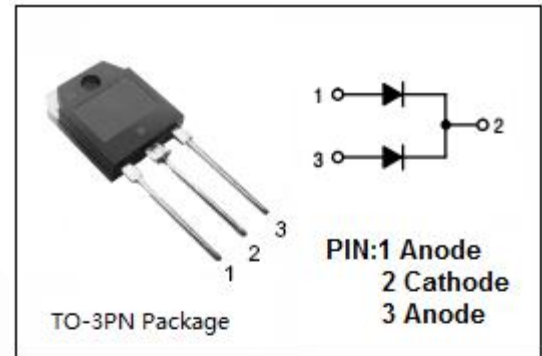

| DIM | mm | |
|-----|-------|-------|
| | MIN | MAX |
| A | 19.60 | 20.30 |
| B | 15.50 | 15.70 |
| C | 4.70 | 4.90 |
| D | 0.90 | 1.10 |
| E | 1.90 | 2.10 |
| F | 3.40 | 3.60 |
| G | 2.90 | 3.20 |
| H | 3.20 | 3.40 |
| J | 0.595 | 0.605 |
| K | 19.80 | 20.70 |
| L | 1.90 | 2.20 |
| N | 10.89 | 10.91 |
| Q | 4.90 | 5.10 |
| R | 3.35 | 3.45 |
| S | 1.995 | 2.100 |
| U | 5.90 | 6.20 |
| Y | 9.90 | 10.10 |

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

| SYMBOL | PARAMETER | VALUE | UNIT |
|--|---|----------|------|
| V _{RRM} V _{RWM} V _R | Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | 45 | V |
| I _{F(AV)} | Average Rectified Forward Current (Rated V _R) T _C = 125°C Per Diode Per Device | 30 60 | A |
| I _{FSM} | Nonrepetitive Peak Surge Current 8.3ms single half sine-wave superimposed on rated load conditions | 500 | A |
| I _{RSM} | Peak Repetitive Reverse Surge Current (20 μs, 1.0kHz) | 2.0 | A |
| T _J | Junction Temperature | -65~175 | °C |
| T _{stg} | Storage Temperature Range | -65~175 | °C |
| dv/dt | Voltage Rate of Change (Rated V _R) | 10,000 | V/μs |

Schottky Barrier Rectifier**MBR6045WT****THERMAL CHARACTERISTICS**

| SYMBOL | PARAMETER | MAX | UNIT |
|---------------|--------------------------------------|-----|---------------|
| $R_{th\ j-c}$ | Thermal Resistance, Junction to Case | 1.0 | $^{\circ}C/W$ |

ELECTRICAL CHARACTERISTICS (Pulse Test: Pulse Width=300 μ s, Duty Cycle \leq 2.0%)

| SYMBOL | PARAMETER | CONDITIONS | MAX | UNIT |
|--------|---------------------------------------|--------------------------------------|------|------|
| V_F | Maximum Instantaneous Forward Voltage | $I_F = 30A ; T_c = 25^{\circ}C$ | 0.62 | V |
| | | $I_F = 30A ; T_c = 125^{\circ}C$ | 0.55 | |
| | | $I_F = 60A ; T_c = 25^{\circ}C$ | 0.75 | |
| I_R | Maximum Instantaneous Reverse Current | $V_R = V_{RWM} ; T_c = 25^{\circ}C$ | 1.0 | mA |
| | | $V_R = V_{RWM} ; T_c = 125^{\circ}C$ | 10 | |