

SWITCHING TYPE POWER SUPPLY APPLICATION.
CONVERTER & CHOPPER APPLICATION.



FEATURES

- Average Output Rectified Current
: $I_O=6A$.
- Repetitive Peak Reverse Voltage
: $V_{RRM}=60V$.

MAXIMUM RATING ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	60	V
Average Output Rectified Current ($T_c=114^\circ C$) (Note)	I_O	6	A
Peak One Cycle Surge Forward Current (Non-Repetitive 60Hz)	I_{FSM}	45	A
Junction Temperature	T_j	-40 150	
Storage Temperature Range	T_{stg}	-55 150	

Note : average forward current of centertap full wave connection.

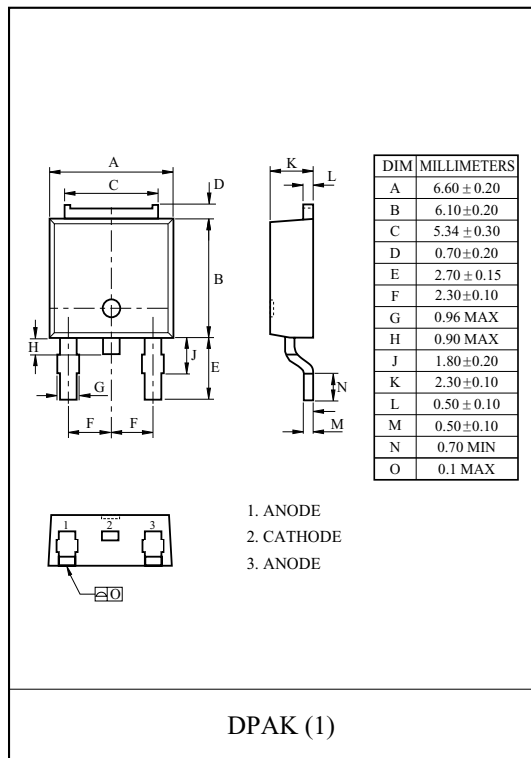


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage (Note)	V_{FM}	$I_{FM}=3A$	-	-	0.65	V
Repetitive Peak Reverse Current (Note)	I_{RRM}	$V_{RRM}=60V$	-	-	50	μA
Thermal Resistance (Note)	$R_{th(j-c)}$	Junction to Case	-	-	6.0	/W

Note : A value of one cell

MBRD6U60CT

$I_F - V_F$

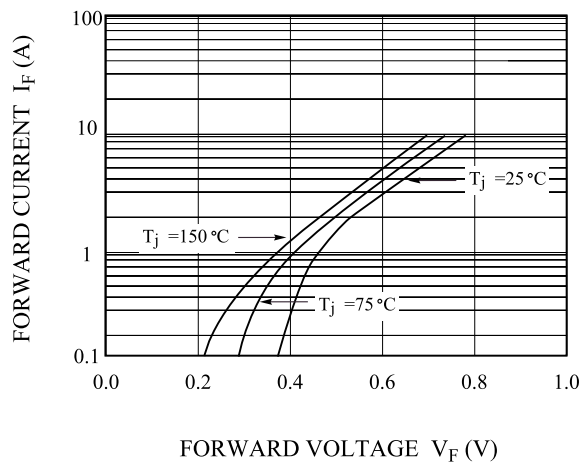

$I_R - V_R$

