


Product Specification

GOODARK Type
MBRF20100CT

Construction : Schottky Barrier Rectifier
Application : For General Purpose
(Manufacturer) :
Suzhou Goodark Electronics Co.,Ltd
Prepared on Sep. 17th, 2008
Prepared: R & D Department
Approval: QRA Department

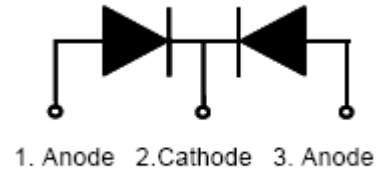


**SCHOTTKY BARRIER
RECTIFIER
20 AMPERES
100 VOLTS**

CONTENTS

1. Package Outline
2. Marking
3. Features& Mechanical Characteristics
4. Maximum Ratings and Electrical Characteristics
5. Rating and characteristic Curves
6. Packing Specification PACKAGING SPECIFICATION
7. Description of Box Label


1. Package Outline (TO220F)


UNIT:mm

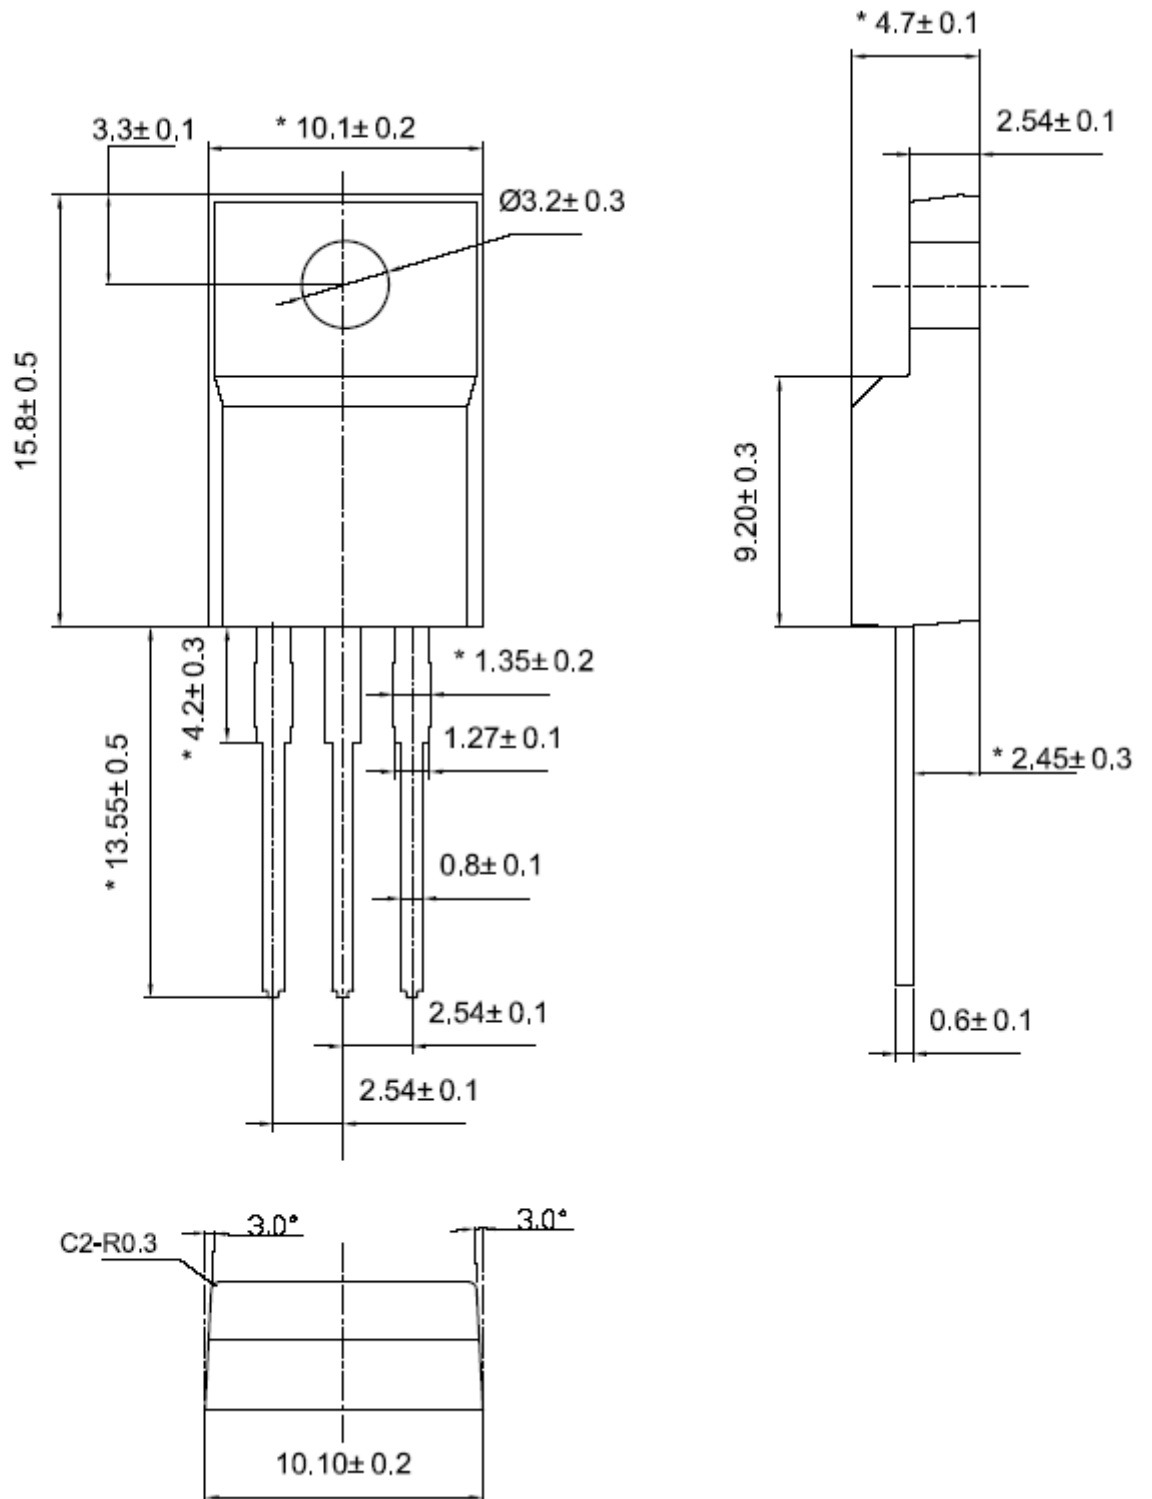

Lead Frame Material : Copper Plating: Pure Tin Plating

2.MARKING

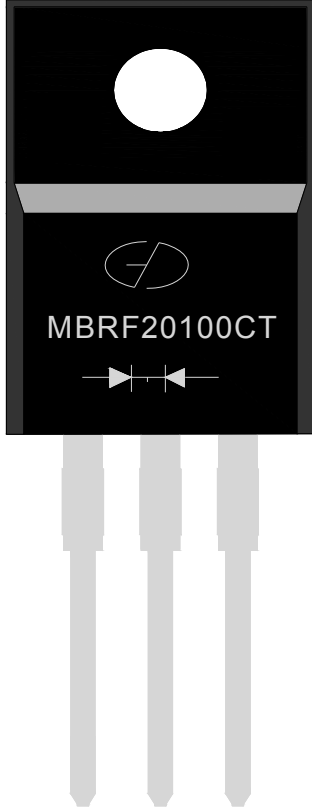

1. Part Name : MBRF20100CT
2. Logo Mark: 
3. Polarity: 



3.Features& Mechanical Characteristics

Features

- Plastic package has underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive center tap
- Metal of silicon rectifier, majority carrier conduction
- Low forward voltage, high efficiency
- Guarding for over voltage protection
- For use in low voltage, high frequency inverters,
- Free wheeling, and polarity protection applications

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max.for10 sec
- Shipped 50 units per plastic tube

4.Maximum Ratings and Electrical Characteristics

MAXIMUM RATINGS and ELECTRICAL CHARACTERISTICS(TC=25°C unless otherwise moted)					
PARAMETER	TEST CONDITIONS		SYMBOL	MBRF20100CT	UNIT
Maximum repetitive peak reverse voltage			VRRM	100	V
Working peak reverse voltage			VRWM	100	V
Maximum DC blocking voltage			VDC	100	V
Maximum average forward rectified current at Tc=105°C total device per diode			IF(AV)	20 10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode			IFSM	150	A
Peak repetitive reverse current per leg at tp=2.0us , 1KHz			IRRM	0.5	A
Voltage rate of change (rated VR)			DV/dt	10000	V/us
Operating junction temperature range			TJ	—55 to +150	°C
Storage temperature range			TSTG	—55 to +150	°C
Isolation voltage (ITO-220AB only) from terminal to heatsink t = 1 min			VAC	1500	V
Maximum instantaneous forward voltage per leg	IF=10A	Tc=25°C	VF	0.80	V
	IF=10A	Tc=125°C		0.65	
	IF=20A	Tc=25°C	VF	0.95	V
IF=20A	Tc=125°C	0.75			
Maximum reverse current per leg at working peak Reverse voltage		Tc=25°C Tc=100°C	IR	0.2 6	mA

Thermal Characteristics Ta=25°C unless otherwise noted

Symbol	Parameter	Max	Unit
RθJC	Thermal Resistance, Junction to Case per Leg	4.0	°C /W
RθJA	Thermal Resistance, Junction to Ambient per Leg	62.5	°C /W

Note:

1. Screw mounting with 4-40 screw, where washer diameter is ≤4.9mm(0.19 ")
2. Pulse test:300us pulse width,1% duty cycle

5. Rating and Characteristic Curves

(TA = 25 °C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

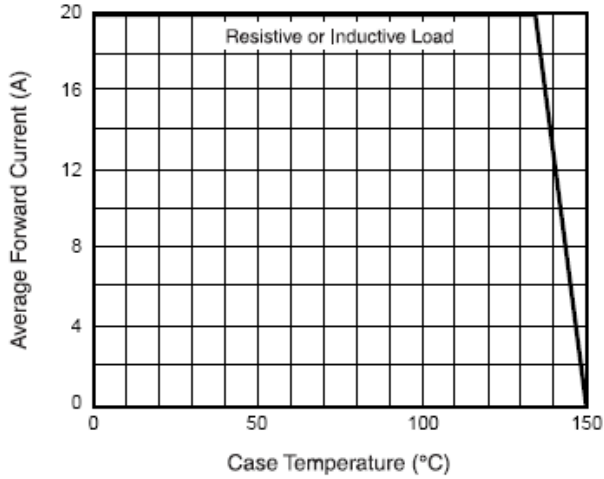


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

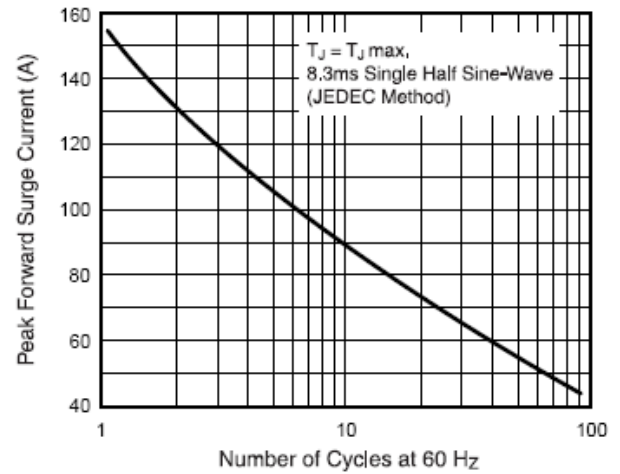


Fig. 3 - Typical Instantaneous Forward Characteristics

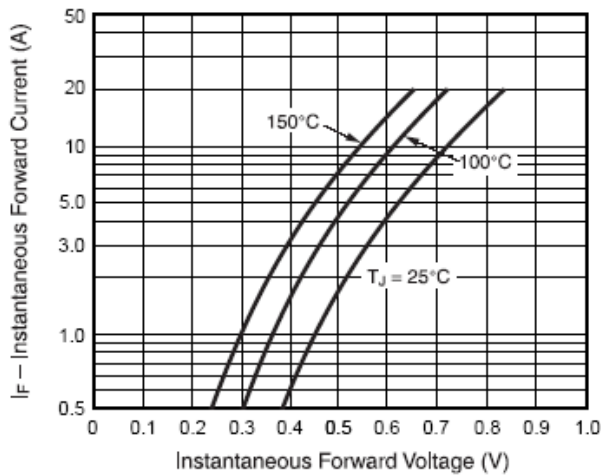


Fig. 4 - Typical Reverse Characteristics



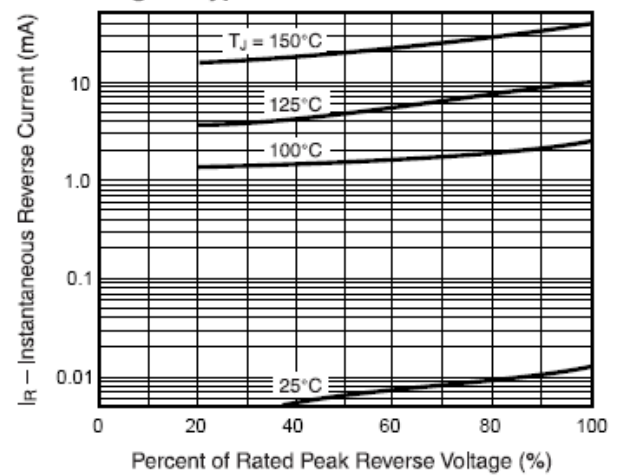



Fig. 5 - Typical Transient Thermal Impedance

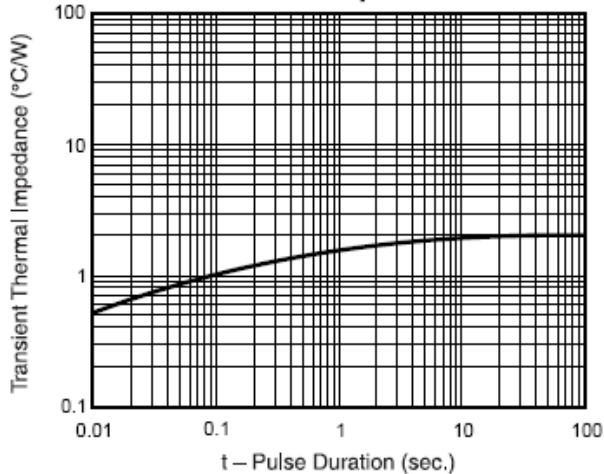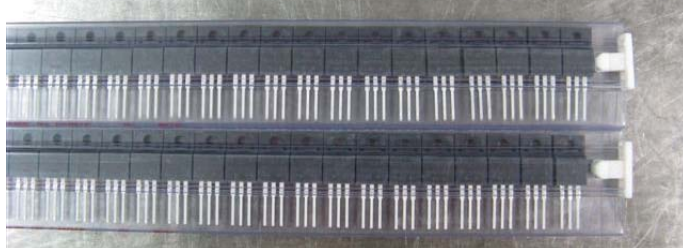

6. Packing Specification

	
1) Tube : 50units	2) Inner Box: 20 tube(1000units)
	
3) Outer Box: 10 inner box (10,000units)	

7. DESCRIPTION of BOX LABEL

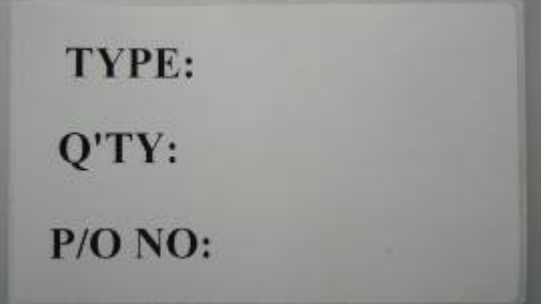	
1) Inner Box Label	2) Inner Box Label
	
3) Outer Box Label	4) Outer Box Label