

Schottky Barrier Rectifiers

MBRX160L

Features

- Metal silicon junction, majority carrier conduction
- High surge capability
- High temperature soldering guaranteed:
260°C/10 seconds
- High current capability, low forward voltage drop
- Guarding for over voltage protection
- RoHS Compliant



Mechanical Data

- Case: SOD-123FL molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity: Color band denotes cathode end

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	MBRX160L	Units
Peak repetitive reverse voltage	V _{RRM}	60	V
RMS reverse voltage	V _{RMS}	42	V
DC blocking voltage	V _{DC}	60	V
Maximum average forward output current	I _{F(AV)}	1.0	A
Peak forward surge current, 8.3ms single half-sine-wave	I _{FSM}	35	A

Thermal Characteristics

Parameter	Symbol	MBRX160L	Units
Typical thermal resistance (Note 1)	R _{θJA}	85	°C /W
	R _{θJC}	23	
	R _{θJL}	15	
Operating junction temperature range	T _J	- 55 ---- + 125	°C
Storage temperature range	T _{STG}	- 55 ---- + 150	°C

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Schottky Barrier Rectifiers**MBRX160L****Electrical Characteristics** (@ $T_A = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions		Typ.	Max.	Units
Maximum instantaneous forward voltage(Note 1)	V_F	$I_F=1.0\text{A}$	@ $T_A=25^{\circ}\text{C}$	--	0.58	V
Maximum Reverse current (Note 2)	I_R	Rated V_R ,	@ $T_J=25^{\circ}\text{C}$	--	500	μA
			@ $T_J=100^{\circ}\text{C}$	--	40	m A

Note:


1.Pulse test: 300us pulse width, 1 % duty cycle

2.Pulse test: Pulse width 40ms


Schottky Barrier Rectifiers

MBRX160L

Package Outline Dimensions(unit:mm)

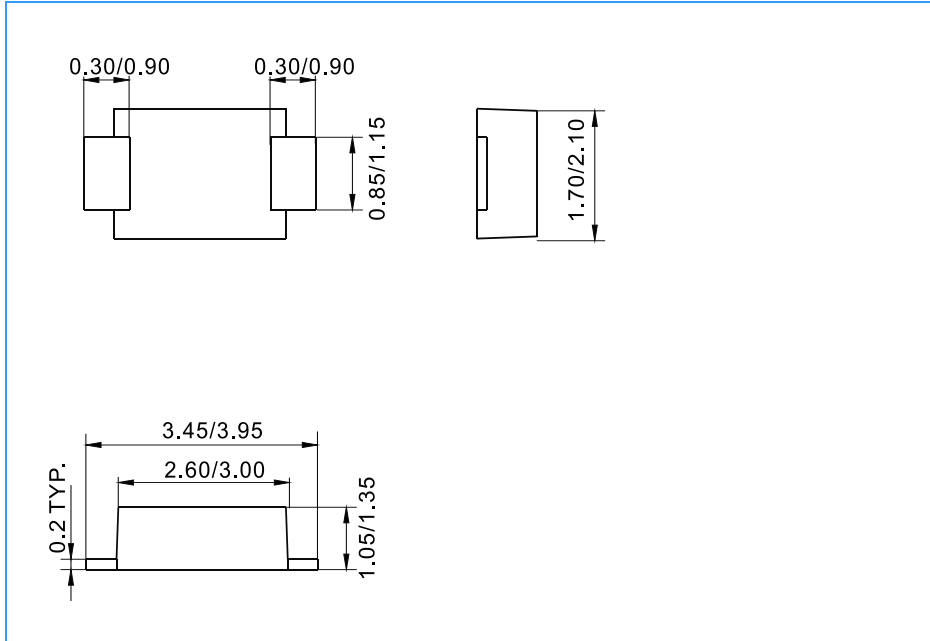

Mounting Pad Layout(unit:mm)

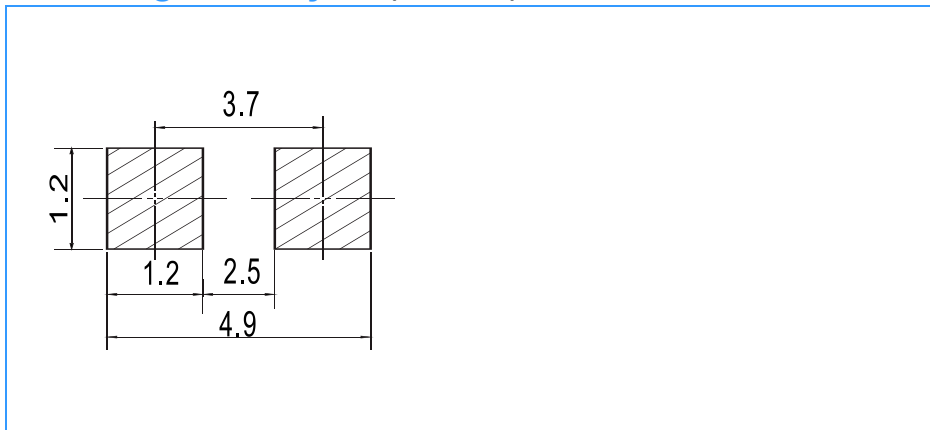

Ordering Information

Part No.	Marking	Package	Shipping
MBRX160L	L16	SOD-123FL	10000/Tape&Reel