





DUAL 4-INPUT NAND BUFFER

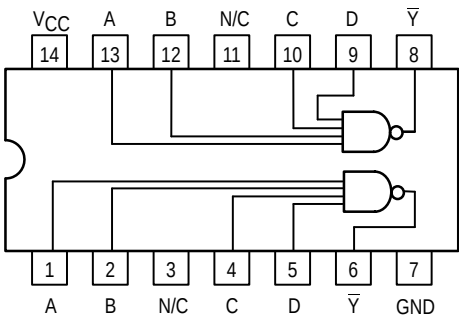


MC74F40


DUAL 4-INPUT NAND BUFFER
FAST™ SCHOTTKY TTL



J SUFFIX
CERAMIC
CASE 632-08



N SUFFIX
PLASTIC
CASE 646-06



D SUFFIX
SOIC
CASE 751A-02

ORDERING INFORMATION

MC74FXXJ Ceramic
MC74FXXN Plastic
MC74FXXD SOIC

GUARANTEED OPERATING RANGES

Symbol	Parameter		Min	Typ	Max	Unit
VCC	Supply Voltage	74	4.5	5.0	5.5	V
TA	Operating Ambient Temperature Range	74	0	25	70	°C
IOH	Output Current — High	74			−15	mA
IOL	Output Current — Low	74			64	mA

MC74F40

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

Symbol	Parameter		Limits			Unit	Test Conditions	
			Min	Typ	Max			
V_{IH}	Input HIGH Voltage		2.0			V	Guaranteed Input HIGH Voltage	
V_{IL}	Input LOW Voltage				0.8	V	Guaranteed Input LOW Voltage	
V_{IK}	Input Clamp Diode Voltage				-1.2	V	$V_{CC} = \text{MIN}$, $I_{IN} = -18 \text{ mA}$	
V_{OH}	Output HIGH Voltage	74	2.0			V	$I_{OH} = -15 \text{ mA}$	$V_{CC} = 4.50 \text{ V}$
		74	2.4			V	$I_{OH} = -1.0 \text{ mA}$	
		74	2.7			V	$I_{OH} = -1.0 \text{ mA}$	$V_{CC} = 4.75 \text{ V}$
V_{OL}	Output LOW Voltage				0.55	V	$I_{OL} = 64 \text{ mA}$	$V_{CC} = \text{MIN}$
I_{IH}	Input HIGH Current				20	μA	$V_{CC} = \text{MAX}$, $V_{IN} = 2.7 \text{ V}$	
					0.1	mA	$V_{CC} = \text{MAX}$, $V_{IN} = 7.0 \text{ V}$	
I_{IL}	Input LOW Current				-1.2	mA	$V_{CC} = \text{MAX}$, $V_{IN} = 0.5 \text{ V}$	
I_{OS}	Output Short Circuit Current (Note 2)		-100		-225	mA	$V_{CC} = \text{MAX}$, $V_{OUT} = 0 \text{ V}$	
I_{CC}	Power Supply Current Total, Output HIGH				4	mA	$V_{CC} = \text{MAX}$, $V_{IN} = \text{GND}$	
	Total, Output LOW				17	mA	$V_{CC} = \text{MAX}$, $V_{IN} = \text{Open}$	

NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.
- Not more than one output should be shorted at a time, nor for more than 1 second.

AC CHARACTERISTICS

Symbol	Parameter	74F		74F		Unit
		T _A = +25°C V _{CC} = +5.0 V C _L = 50 pF		T _A = 0°C to 70°C V _{CC} = 5.0 V ± 10% C _L = 50 pF		
		Min	Max	Min	Max	
		Min	Max	Min	Max	
t _{PLH}	Propagation Delay	1.5	6.0	1.5	7.0	ns
t _{PHL}	Propagation Delay	1.0	5.0	1.0	5.5	ns

FUNCTION TABLE

Inputs				Output
A	B	C	D	$\bar{Y}$
L	X	X	X	H
X	L	X	X	H
X	X	L	X	H
X	X	X	L	H
H	H	H	H	L

H = HIGH Voltage Level

L = LOW Voltage Level

X = Don't Care