

DUAL 4-INPUT EXPANDER

MDTL MC930/830 series

MC933F · MC833F, P

DUAL 4-3 INPUT EXPANDER


MC933G · MC833G

This dual expander consists of two independent diode networks with characteristics matched to the input diodes of the gate and buffer elements in this logic family. Its use increases the fan-in capability of other MDTL devices to a maximum of 20 while only slightly affecting performance.

MC933F/MC833F, P



MC933G/MC833G

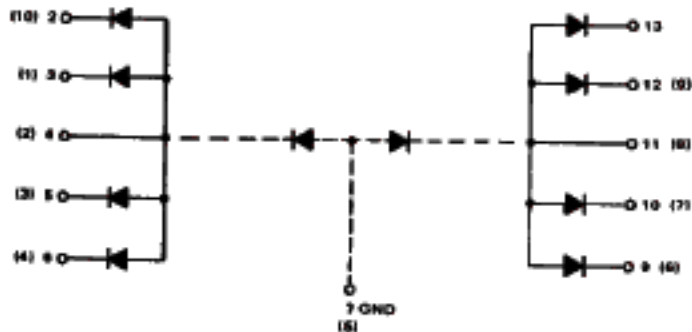

Number at end of terminal represents pin number for flat and dual in-line packages. Number in parenthesis indicates pin number for metal can.

ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one assembler. The other assembler is tested in the same manner.

NOTE: Although the test conditions and test limits are the same for devices in ALL available packages, the table shows pin connections for testing only the flat and dual in-line packaged devices. To test devices in the metal can, substitute pin numbers shown in the conversion table below.

| PACKAGE | PIN NUMBER | | | | | | | | | | | |
|-------------------|------------|---|---|---|---|---|----|----|----|----|---|---|
| | 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
| Flat/Dual In-Line | 2 | 3 | 4 | 6 | 7 | 8 | 10 | 11 | 12 | 13 | - | - |
| Metal Can | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | - | - |



| Characteristic | Symbol | Pin Under Test | MC833 Test Limits | | | | | | | | | | | | TEST CURRENT / VOLTAGE VALUES (All Temperatures) | | Grid |
|-----------------|----------|----------------|-------------------|------|------|------|-------|------|------|------|-------|------|------|------|--|----------|------|
| | | | -55°C | | | | +25°C | | | | +75°C | | | | mA | Volts | |
| | | | Test | Min | Max | Unit | Test | Min | Max | Unit | Test | Min | Max | Unit | | | |
| Forward Voltage | V_{FD} | 4 | - | 0.90 | - | 0.82 | - | 0.80 | - | 0.82 | - | 0.75 | 1.60 | - | - | 2.7 | |
| | | 4 | 0.85 | - | 0.70 | - | 0.75 | - | 0.68 | - | 0.60 | - | - | - | 2.0 | | |
| Reverse Current | I_R | 2 | - | 3.0 | - | 2.0 | - | 5.0 | - | 5.0 | - | 10 | 10 | - | 2 | 2.5, 3.7 | |
| | | 2 | - | - | - | - | - | - | - | - | - | - | - | - | 2 | 2.5, 3.7 | |
| | | 6 | - | - | - | - | - | - | - | - | - | - | - | - | 0 | 2.5, 3.7 | |
| | | 4 | - | 10 | - | 25 | - | 25 | - | 38 | - | - | - | - | 0 | 2.5, 3.7 | |
| | | | | | | | | | | | | | | | | 1 | |
| | | | | | | | | | | | | | | | | | 1 |

*Max and Min are not spec.

PRODUCT DOCUMENTATION

The three documents listed in the following table are required for a complete description of the DSP56301 and are necessary to design properly with the part. Documentation is available from one of the following locations (see back cover for detailed information):

- A local Motorola distributor
- A Motorola semiconductor sales office
- A Motorola Literature Distribution Center
- The World Wide Web (WWW)

See the **Additional Support** section of the *DSP56300 Family Manual* for detailed information on the multiple support options available to you.

Table 1 DSP56301 Documentation

| Name | Description | Order Number |
|-------------------------|---|---------------|
| DSP56300 Family Manual | Detailed description of the DSP56300 family processor core and instruction set | DSP56300FM/AD |
| DSP56301 User's Manual | Detailed functional description of the DSP56301 memory configuration, operation, and register programming | DSP56301UM/AD |
| DSP56301 Technical Data | DSP56301 features list and physical, electrical, timing, and package specifications | DSP56301/D |