

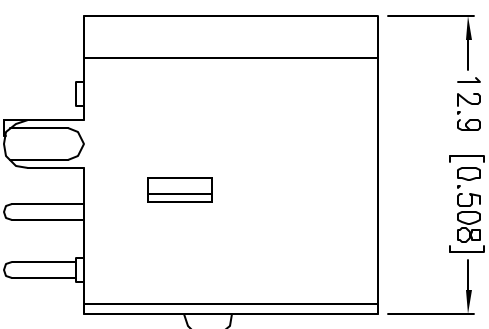


STANDARD TYPE

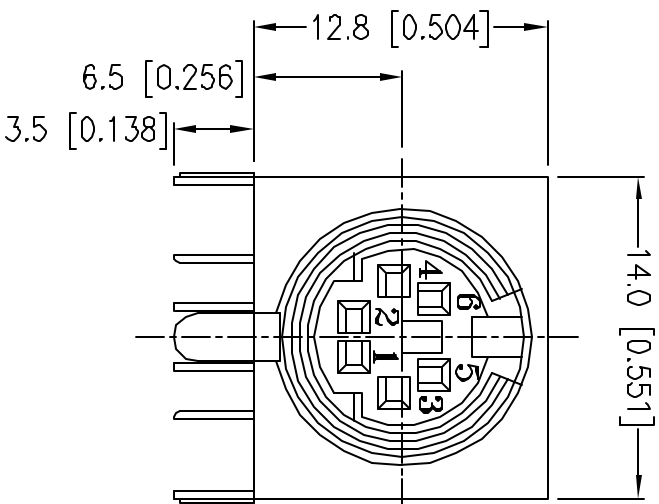

FOOTPRINT (TOP VIEW)

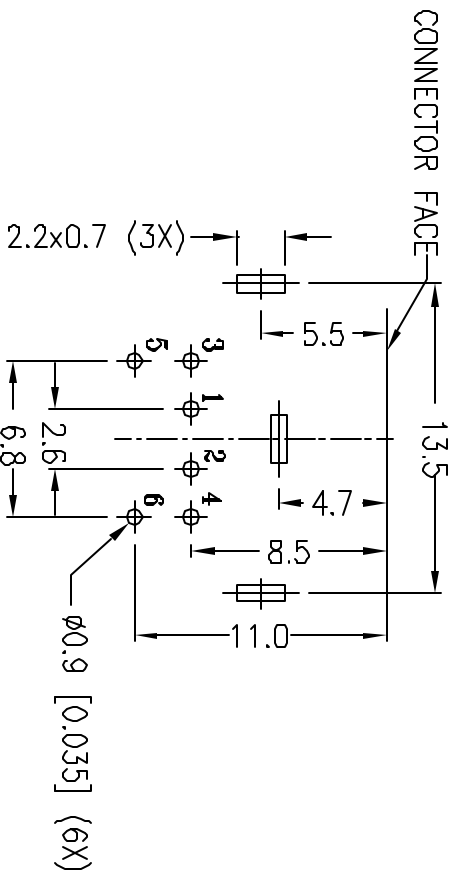

SPECIFICATIONS:

RATING: 100V AC 1A MAX OR
12V DC 2A MAX
INSULATION RESISTANCE:
50 MOHM MIN AT 250V DC
DIELECTRIC STRENGTH:
250V AC, 1 MINUTE
CONTACT RESISTANCE:
30 MOHM MAX
INSERTION FORCE:
4.5KG MAX
WITHDRAWAL FORCE:
0.9KG~3KG

9615 SW Allen, Suite 103 Beverton, OR 97006 Phone: (503) 643-4899 800-276-4899 Fax: (503) 372-1266 Website: www.cui.com		
cui inc		
MINIATURE CIRCULAR CONNECTOR WITH SHIELD		
PART NO.: MD-60SM	UNITS: MM [INCHES]	SCALE: 3X
DRAWN BY:	APPROVED BY:	